

COMMERCIAL FLOORING

■ ENTRANCE SYSTEMS

■ MATTING

■ SPORTS & FITNESS

■ CONTRACT



matsinc.[®]
Every step of the way



ABOUT US

In 1971, Robert J. (Bob) Schiffmann and his wife Catherine, a school nurse, founded Mats Inc. while raising their four children. In the beginning, Bob sold mats out of the trunk of the family car, while Catherine handled the record keeping in the evenings. The rest is history.

Now a second generation family-owned business, Mats Inc. has celebrated forty-five years of exceptional products and determined spirit upon which the company was built with the dedication of the new corporate headquarters building.

Mats Inc. is proud to offer some of the industry's most leading and innovative products and world class service. We are a value-centered business, rich in tradition, innovation, and excellence, with a strong commitment to our employees, customers, and the communities in which we do business.

At the heart of Mats Inc's line of products is a full array of flooring solutions for commercial construction and renovation. Our headquarters location is in Stoughton, MA; we have a spacious warehouse in GA, a distribution facility in NV, sales offices throughout the United States and a network of dealers and distributors that deliver our products to the commercial markets.

From the finest entrance systems to superior interior matting products and high-performance sports flooring to distinctive contract flooring, we are continually updating and adding to our product line. Please visit our web site for the latest and most up-to-date information, www.matsinc.com or contact us at 1-800-628-7462.

We value your business and will make every effort to continue to meet your needs...every step of the way.



JOHN SCHIFFMANN
Owner




PAUL SCHIFFMANN
Owner




RICHARD SCHIFFMANN
Owner

ADDITIONAL RESOURCES AVAILABLE

Entrance Systems & Matting

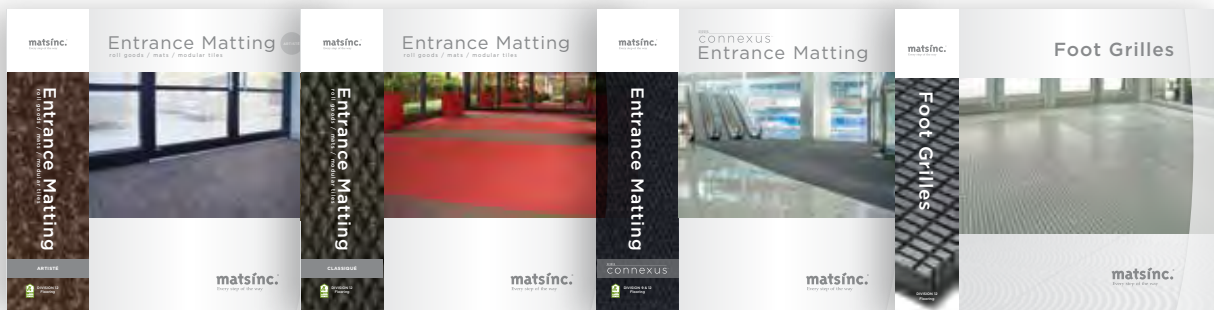

Sports & Fitness

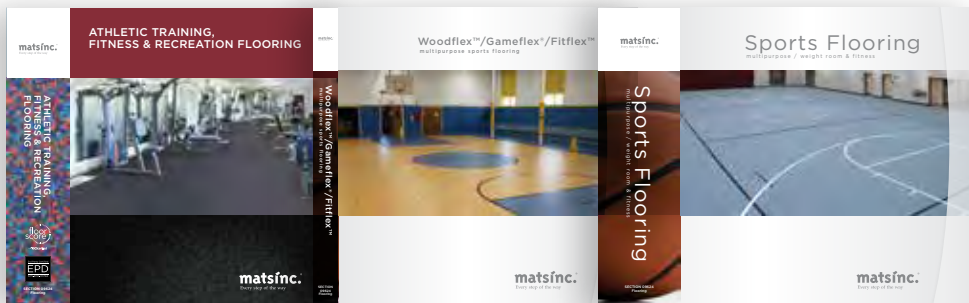

SUSTAINABLE SOLUTIONS

Mats Inc. is proud to provide sustainable flooring solutions that support green building and certification programs including LEED, Green Globes, Living Building Challenge and others.

Our extensive entrance matting and floor covering lines include products that are FloorScore® certified, Green Label Plus certified, and other products that can contribute to sustainable design strategies, such as:



- Entrance systems designed to protect indoor air quality
- Fiber products that are Green Label Plus
- Environmental Product Declarations and Health Product Declarations for resilient flooring and installed matting
- Botanol rolls and planks produced from nearly 90% renewable and natural raw materials
- Rubber products made from recycled tires
- No-wax, low maintenance, long-lasting distinctive flooring

We aspire to achieve the highest standards for sustainable commercial flooring and will continue to deliver new and innovative products to help advance our industry.

As members of GBI and the USGBC with LEED AP personnel on staff, we are here to help you achieve your sustainable design goals.



Contract Flooring

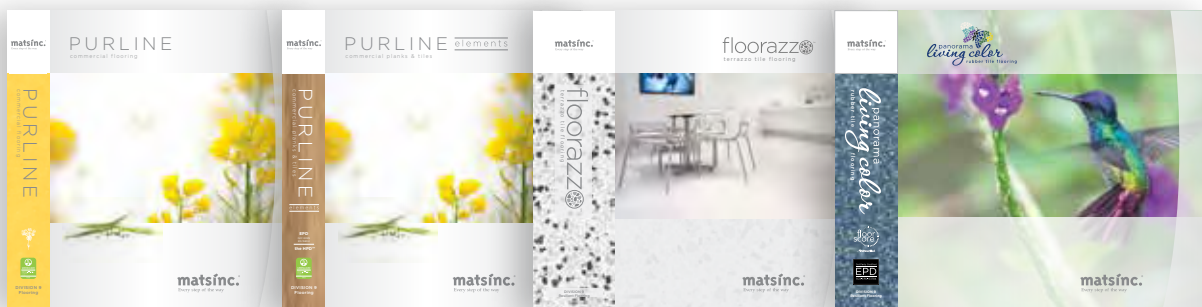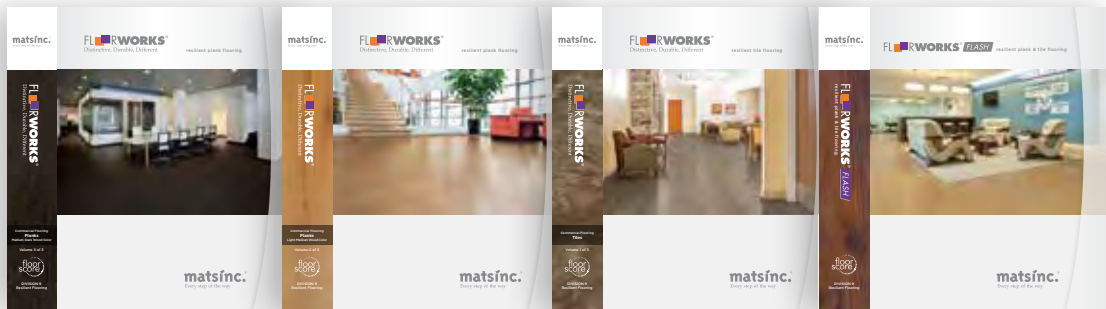

INDEX

SYMBOLS

3M™ Nomad™ Carpet Matting 4000	40
3M™ Nomad™ Carpet Matting 5000	40
3M™ Nomad™ Carpet Matting 6500	39
3M™ Nomad™ Heavy Traffic Carpet Matting 8850	39
3M™ Nomad™ Carpet Matting Journey 7000™ ..	36
3M™ Nomad™ Embossed Scraper Matting	34
3M™ Nomad™ Extreme Wall-to-Wall Carpet Matting 9800	29
3M™ Nomad™ Medium Traffic Backed Scraper Matting 6050	15
3M™ Nomad™ Modular Matting 9200	16
3M™ Nomad™ Printed Carpet Matting 6600	33
3M™ Nomad™ Scraper Matting 2500	14
3M™ Nomad™ Heavy Traffic Unbacked Scraper Matting 8100 & 3M™ Nomad™ Heavy Traffic Backed Scraper Matting 8150	15
3M™ Nomad™ Z-Web Extreme Traffic Scraper Matting 9100	16
3M™ Nomad™ Z-Web Medium Traffic Scraper Matting 6250	16
3M™ Safety-Walk™ Cushion Matting 3270	47
3M™ Safety-Walk™ Cushion Matting 5100	47
3M™ Safety-Walk™ Cushion Matting 5270	47
3M™ Safety-Walk™ Wet Area Matting 1500	51
3M™ Safety-Walk™ Wet Area Matting 3200	51

A

Activation Sport Tile	65
Adhesives	96
Advanced Track	6
Aluminum Framing	93
Aqua Block	43
Aqua Block Tile	24
Array Track	4

B

Berber	28
Berber Eze	46
Berber Tile	21
Berber Vinylback	41
Berkshire	28
Bristle Mat™	44
Bubble Mat	48

C

Calypso Tile	22
Chicago Collection™ RB	26
Chicago Collection™ VB	37
Cleaners & Sealers	96
CleanZone™	vi
Cocoa Mat	29
Combination Sport Tile	63
Comfort Matting	45
Contract Flooring	69
Cushion Eze	46

D

Debolon	78
Decathlon	67
Decathlon Design	67

Decorib	29
Design Print™	33
Design Track	3
Diagonal Tile	21
Diamond Block	42
Domination™	64
Dri Track	6
Dual Track	6
Ducktile™	50
Duo Tile	66

E

Eco Tile	55
Enterprise Tile™	23
Ergorunner	48

F

Fitflex	58
Floorazzo™	70
Floorazzo™ Gem	72
Floorazzo™ Marble	73
Floorworks® Flash	81
Floorworks® Planks & Tiles	80
FloorFx	92
Foot Grilles	1

G

Gameflex®	59
Geo Tile	24
Grate Grid	9
Grate Mat	10
Grate Mat XT	10

J

Journey Tile™	19
---------------------	----

K

Kushion Safe	49
Kushion Safe Light	49
Kushion Safe Modular	49

L

Legacy	12
Legacy Nop	12
Legacy Tile	13
Legend	13
Levelers	95
Liberty Tile	13
Lock Mat	68
Logo Mats	30

M

Matting: Roll Goods & Mats	25
Matting: Walk-Off Mats & Runners	35
MetroSteel™ Grate	9
Mighty Track	4
Mixology™ Online	87
MultiLino™	57
Multipurpose	56

N

New York Collection	38
---------------------------	----

Nosing & Edging	94
Nuway®	8

O

Olefin	43
Outdoor & Rooftop Pavers	53

P

Panorama Cork & Color	86
Panorama Custom	87
Panorama Living Color	84
Pin Step	42
Precision Inlay™ with Luxtria™	31
Precision Inlay™ with Super Nop® 52	32
Propel Tile™	68, 90
Pro Shield	60
Pro Track Series	2

S

Safe Track	3
SaniPath™	54
Seattle Collection™ RB	26
Seattle Collection™ VB	37
Skypath	54
Slip Not 2000 Tile	22
Soft Grid™	14
Soliris™	88
Specialty Solutions	52
Spectation™	62
Super Nop® 52 Tile	20
Super Sport Weight Mat	68
Supreme Nop	27

T

Tapes	95
Terratrax™ Point	89
Terratrax™ Block	89
Tiles	17
Tire Tile	23
Tough Rib	44
Transitions	95
Trilogy Tile™	18

U

Ultra Entry™	11
Ultra Track	4
Underfloor MC	92
Underfloor SL	59, 92
Underfloor QC	92
Underlayment	92

W

wineo PURline	74
wineo PURline Planks	76
wineo PURline Tiles	77
Weight Rooms & Fitness	61
Wet Area Matting	45
Woodflex™	58

X

X-Core Connect™	82
-----------------------	----

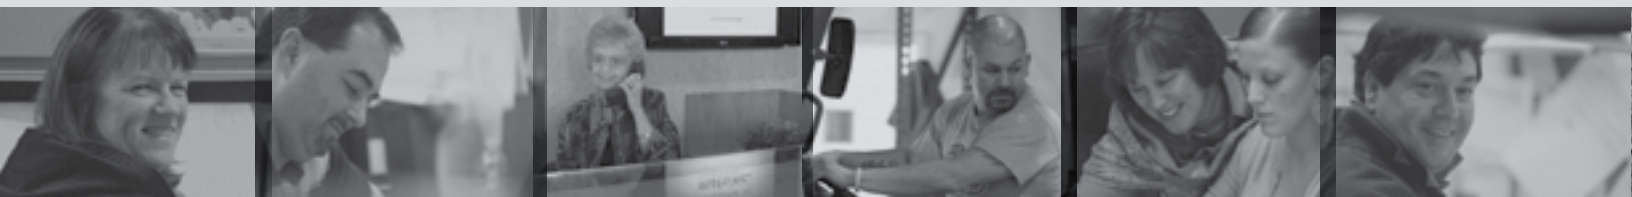


TABLE OF CONTENTS

About Us	ii	Supreme Nop	27	Woodflex™/Fitflex	58
Sustainable Solutions	iii	Berber	28	Gameflex®	59
The CleanZone™	vi	Berkshire.....	28	Underfloor SL.....	59
FOOT GRILLES	1	Decorib.....	29	Pro Shield	60
Pro Track Series	2	Cocoa Mat	29	WEIGHT ROOMS & FITNESS	61
Design Track	3	3M™ Nomad™ Extreme Traffic Wall-to-Wall Carpet Matting 9800	29	Spectation™.....	62
Safe Track.....	3	MATTING: LOGO MATS	30	Combination Sport Tile.....	63
Array Track	4	Precision Inlay™ with Luxtria™	31	Domination™.....	64
Mighty Track.....	4	Precision Inlay™ with Super Nop® 52	32	Activation Sport Tile.....	65
Ultra Track	4	Design Print™.....	33	Duo Tile.....	66
Advanced Track.....	6	3M™ Nomad™ Printed Carpet Matting 6600.....	33	Decathlon.....	67
Dual Track.....	6	3M™ Nomad™ Embossed Scraper Matting.....	34	Decathlon Design.....	67
Dri Track	6	MATTING: WALK-OFF MATS & RUNNERS	35	Lock Mat.....	68
Designer Insert Options.....	7	3M™ Nomad™ Carpet Matting Journey 7000™ ...	36	Super Sport Weight Mat.....	68
Nuway®	8	Chicago Collection™ VB.....	37	Propel Tile™	68
Grate Grid.....	9	Seattle Collection™ VB.....	37	CONTRACT FLOORING	69
MetroSteel™ Grate.....	9	New York Collection	38	Floorazzo™	70
Grate Mat.....	10	3M™ Nomad™ Heavy Traffic Carpet Matting 8850	39	Floorazzo™ Gem.....	72
Grate Mat XT.....	10	3M™ Nomad™ Carpet Matting 6500.....	39	Floorazzo™ Marble.....	73
Ultra Entry™	11	3M™ Nomad™ Carpet Matting 5000	40	wineo PURline.....	74
Legacy	12	3M™ Nomad™ Carpet Matting 4000	40	wineo PURline Planks.....	76
Legacy Nop.....	12	Berber Vinylback.....	41	wineo PURline Tiles	77
Legacy Tile.....	13	Pin Step	42	Debolon.....	78
Liberty Tile.....	13	Diamond Block.....	42	Floorworks® Planks & Tiles.....	80
Legend	13	Aqua Block.....	43	Floorworks® Flash.....	81
Soft Grid™	14	Olefin.....	43	X-Core Connect™	82
3M™ Nomad™ Scraper Matting 2500.....	14	Tough Rib	44	Panorama Living Color	84
3M™ Nomad™ Medium Traffic Scraper Matting 6050.....	15	Bristle Mat™	44	Panorama Cork & Color	86
3M™ Nomad™ Heavy Traffic Unbacked Scraper Matting 8100 & 3M™ Nomad™ Heavy Traffic Backed Scraper Matting 8150.....	15	MATTING: COMFORT & WET AREA	45	Panorama Custom.....	87
3M™ Nomad™ Z-Web Medium Traffic Scraper Matting 6250	16	Berber Eze	46	Mixology™ Online.....	87
3M™ Nomad™ Z-Web Extreme Traffic Scraper Matting 9100.....	16	Cushion Eze	46	Soliris™	88
3M™ Nomad™ Modular Matting 9200	16	3M™ Safety-Walk™ Cushion Matting 3270	47	Terratrax™ Point	89
TILES	17	3M™ Safety-Walk™ Cushion Matting 5100.....	47	Terratrax™ Block.....	89
Trilogy Tile™.....	18	3M™ Safety-Walk™ Cushion Matting 5270.....	47	Propel Tile™	90
Journey Tile™.....	19	Bubble Mat.....	48	ACCESSORIES	91
Super Nop® 52 Tile	20	Ergorunner.....	48	Underlayment.....	92
Berber Tile.....	21	Kushion Safe.....	49	Underfloor SL.....	92
Diagonal Tile	21	Kushion Safe Light.....	49	Underfloor MC.....	92
Calypso Tile	22	Kushion Safe Modular.....	49	Underfloor QC.....	92
Slip Not 2000 Tile.....	22	Ducktile™	50	FloorFx.....	92
Enterprise Tile™	23	3M™ Safety-Walk™ Wet Area Matting 3200.....	51	Aluminum Framing.....	93
Tire Tile.....	23	3M™ Safety-Walk™ Wet Area Matting 1500.....	51	Nosing & Edging	94
Geo Tile	24	SPECIALTY SOLUTIONS	52	Transitions & Levelers	95
Aqua Block Tile.....	24	Outdoor & Rooftop Pavers	53	Tapes	95
MATTING: ROLL GOODS & MATS	25	SaniPath™	54	Adhesives	96
Chicago Collection™ RB.....	26	Skypath	54	Cleaners & Sealers.....	96
Seattle Collection™ RB	26	Eco Tile	55		
		MULTIPURPOSE	56		
		MultiLino™.....	57		


OTHER ICONS

-  ROLLS
-  TILES
-  RECYCLED CONTENT

THE CLEANZONE™


The CleanZone™ entrance system protects against liability, reduces maintenance costs and facilitates healthy indoor air quality. Look for the CleanZone™ number in the features section on each product page.

ZONES	1	2	3	4
-------	---	---	---	---

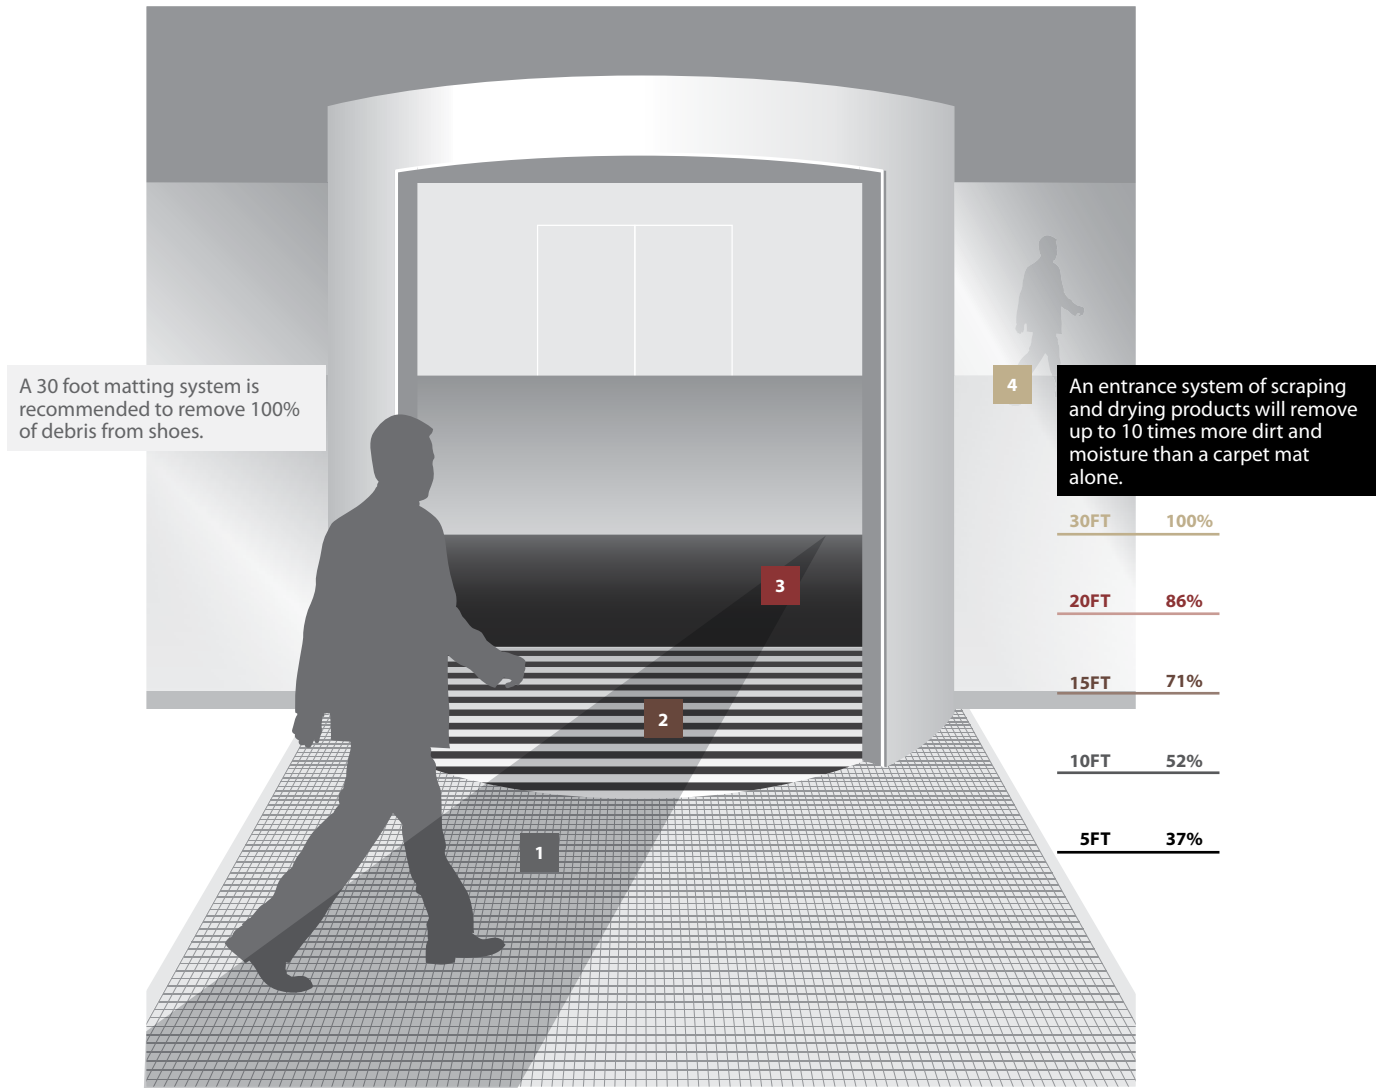

ZONE 1: EXTERIOR

Outside the entrance, choose an aggressive scraping product that is as maintenance-free as possible.



ZONE 2: VESTIBULE

Between the exterior and interior doors, choose a product that scrapes off soil and absorbs moisture.



ZONE 3: LOBBY

In lobby areas, nylon fibers offer optimal performance for additional moisture absorption. Polypropylene fibers are ideal for applications requiring additional debris removal.



ZONE 4: INTERIOR

For interior flooring, choose a style/performance combination best suited for the application.



ENTRANCE SYSTEMS & MATTING

FOOT GRILLES

DESIGN TRACK




PRO TRACK SERIES



PRO TRACK TECHNOLOGY

Pro Track Series Foot Grilles feature cross-bolt supports with individual aluminum spacers to accommodate the heaviest rolling loads in the industry. Cross-bolt technology provides durable, long-lasting performance.

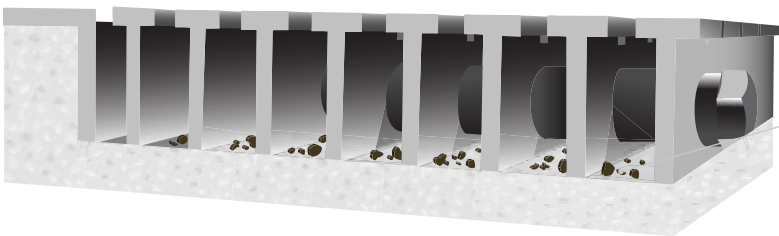

The foot grille blades scrape off dirt and debris from the soles of shoes, the particles drop through the surface and are then captured beneath.

Best for the heaviest traffic and rolling loads in Zone 1

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Exclusive, cross-bolt technology outlasts traditional welded key-lock construction
 Anti-slip surface for indoor and outdoor applications; ADA compliant
 Maintenance-free surface looks brand new for years
 Custom shapes available
 Frames come pre-assembled
 Drain pan option available
 Outstanding scraping performance for entrances with multi-directional traffic
 Common Uses—Entryways in office buildings, retail stores, malls, hospitals, schools, ski resorts, sporting facilities, transportation buildings, hotels

SPECIFICATIONS ♻️

<p>Material Heavy gauge 6061-T6 aluminum with 64% pre-consumer and 16% post-consumer recycled content, mill finish</p> <p>Size Custom made to your requirements. Consult our Product Specialists for assistance.</p> <p>Maximum Panel Size 48" (front and back) x 42" (left to right) Multiple panels are used to construct the foot grille system</p>	<p>Design Track Style Cross-cut rectangular surface with bolted cross supports</p> <p>Safe Track Style Cross-cut surface with bolted cross supports</p>
---	---

Maximum Rolling Load
Pounds per wheel for Level Base Installation

	2' Span	2' 8" Span	3' 6" Span
Design Track	2,796	1,900	1,372
Safe Track	2,032	1,394	827

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 5 (1 point)
MR Credit 5 (1-2 points)	

POSSIBLE LEED V 4 CREDITS

MR Material Ingredients (up to 2 points)
 MR Sourcing of Raw Materials (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)


DESIGN TRACK

DEEP RECESSED SYSTEM






SAFE TRACK

DEEP RECESSED SYSTEM

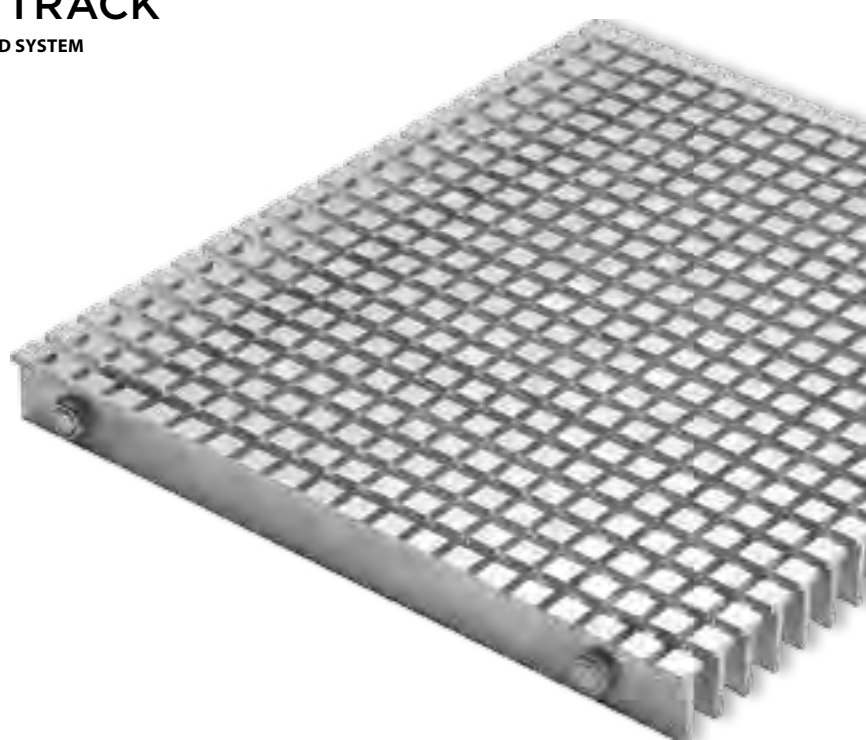

LEVEL BASE INSTALLATION OPTIONS for Design Track, Ultra Track and Safe Track

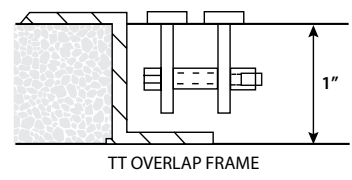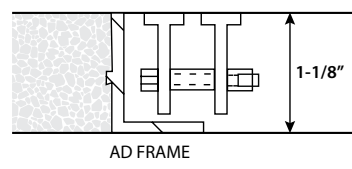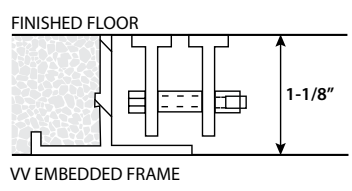

ARRAY TRACK

Unique look and extreme durability for Zone 2.

MIGHTY TRACK

Outstanding scraping performance for entrances with multi-directional traffic in Zone 2.

ULTRA TRACK

A stainless steel look with superior slip resistance, durability and value

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Exclusive, cross-bolt technology outlasts traditional welded key-lock construction
 Anti-slip surface for indoor and outdoor applications; ADA compliant
 Maintenance-free surface looks brand new for years
 Custom shapes available
 Frames come pre-assembled
 Drain pan option available
 Ultra Track: Best choice for radius cuts and revolving doors
 Unique "T" blade design prevents debris from lodging within the grille
 Common Uses—Entryways in office buildings, retail stores, malls, hospitals, schools, ski resorts, sporting facilities, transportation buildings, hotels

SPECIFICATIONS ♻️

Material
 Heavy gauge 6061-T6 aluminum with 64% pre-consumer and 16% post-consumer recycled content, mill finish

Size
 Custom made to your requirements. Consult our Product Specialists for assistance.

Maximum Panel Size
 48" (front and back) x 42" (left to right)
 Multiple panels are used to construct the foot grille system

Maximum Rolling Load
 Pounds per wheel for Level Base Installation

	2' Span	2' 8" Span	3' 6" Span
Array Track	3,312	2,276	1,656
Mighty Track	2,040	1,400	1,024
Ultra Track	3,828	2,652	1,936

POSSIBLE LEED V 2009 CREDITS


MR Credit 4 (1-2 points) IEQ Credit 5 (1 point)
 MR Credit 5 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Material Ingredients (up to 2 points)
 MR Sourcing of Raw Materials (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)


ARRAY TRACK

DEEP RECESSED SYSTEM

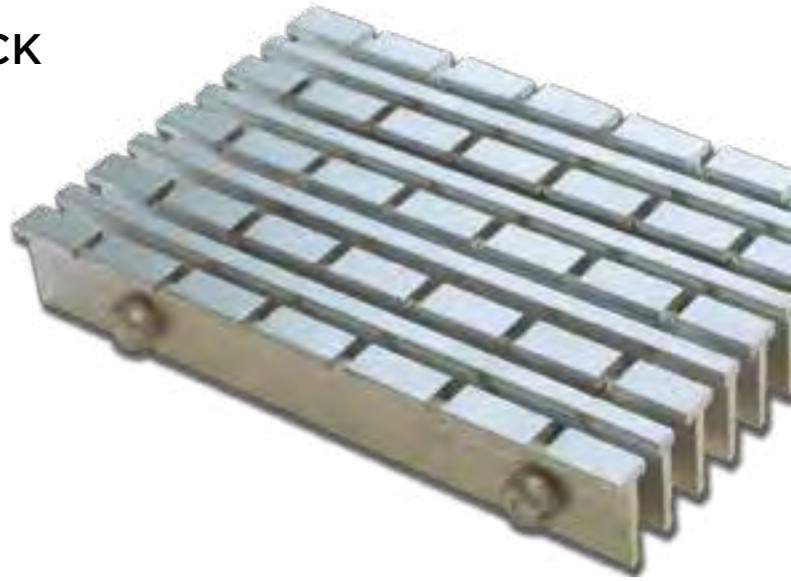

MIGHTY TRACK

DEEP RECESSED SYSTEM

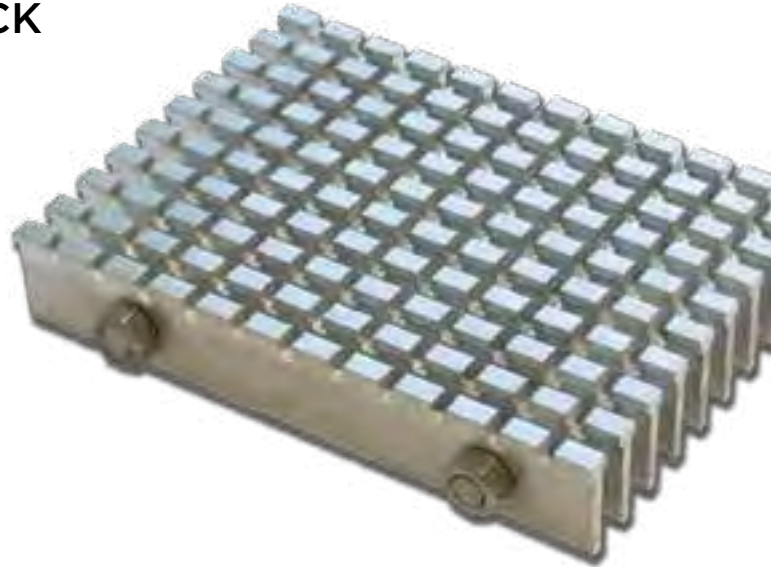

ULTRA TRACK

DEEP RECESSED SYSTEM





ADVANCED TRACK & DUAL TRACK
 Heaviest rolling load in the industry with a wide selection of Designer Insert Options

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Exclusive, cross-bolt technology outlasts traditional welded key-lock construction
 Heaviest rolling load in the industry
 Anti-slip surface for indoor applications; ADA compliant
 Wide variety of Designer Insert Options available
 Custom shapes available
 Advanced Track and Dri Track can be radius cut
 Frames come pre-assembled
 Drain pan option available
 Common Uses—Entryways in office buildings, retail stores, malls, hospitals, hotels, schools, libraries

SPECIFICATIONS ♻️

Advanced Track Material
 Heavy gauge 6061-T6 aluminum with aluminum alloy 6063-T5 scraping rails and standard 100% nylon fiber drying inserts. 51.84% pre-consumer and 14.86% post-consumer recycled content. Recycled content varies with Designer Insert Options.

Dri Track Material
 Heavy gauge 6061-T6 aluminum with standard 100% nylon fiber drying inserts. 51.84% pre-consumer and 14.86% post-consumer recycled content. Recycled content varies with Designer Insert Options.

Dual Track Material
 Heavy gauge 6061-T6 aluminum with 43.97% pre-consumer and 14.12% post-consumer recycled content with standard 100% nylon drying inserts and vinyl scraper bars. Vinyl scraper bars available in black, gray and brown. Recycled content varies with Designer Insert Options.

Style
 Scraping and drying surface with bolted cross supports

Size
 Custom made to your requirements. Consult our Product Specialists for assistance.

Maximum Panel Size
 48" (front and back) x 42" (left to right)
 Multiple panels are used to construct the foot grille system

Depth	VV or AD Frame (New Construction)	TT Overlap Frame (Retrofits)
Grille Only	1-1/2"	1-1/2"
Grille & Frame (Level Base)	1-5/8"	1-1/2"
Grille & Frame (Drain Pan)	2-1/2"	2-1/2"

Maximum Rolling Load
 Pounds per wheel for Level Base Installation

	2' Span	2'8" Span	3'6" Span
Advanced Track	3,831	2,653	1,583
Dual Track	3,831	2,653	1,583
Dri Track	1,608	1,248	1,004

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 5 (1 point)
MR Credit 5 (1-2 points)	

POSSIBLE LEED V 4 CREDITS

MR Material Ingredients (up to 2 points)
 MR Sourcing of Raw Materials (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)


ADVANCED TRACK

DEEP RECESSED SYSTEM



DUAL TRACK

DEEP RECESSED SYSTEM

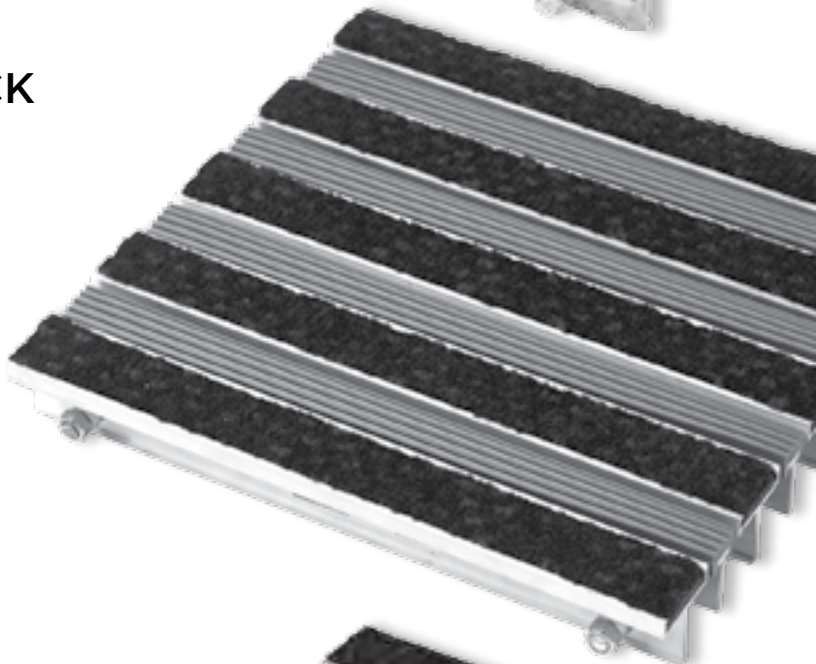

DRI TRACK

DEEP RECESSED SYSTEM





DESIGNER INSERT OPTIONS


Enhance the beauty of the entrance system by matching Zone 3 (lobby) matting with the Foot Grille Designer Inserts in Zone 2 (vestibule). Coordinating Zone 3 matting product pages are referenced here.

SUPREME NOP

Aggressive and attractive polypropylene fiber
SEE PAGE 27



Charcoal Black Walnut Dark Gray Tweed Brown Sable Brown

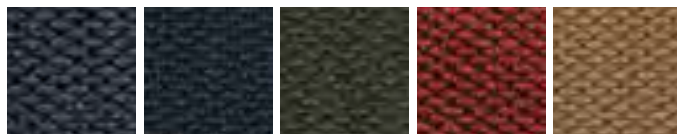

Midnight Blue Sapphire Spruce Autumn Red Natural

NEW YORK COLLECTION

Premium high durability and abrasive nylon fibers.
SEE PAGE 38



Charcoal Splash Charcoal Dark Gray * Light Gray * Blue *



Brown Sugar Brown Cocoa * Cocoa Butter Red *

* Longer lead times may apply for these colors

MORE PRODUCT & COLOR OPTIONS


SEE PAGES 26, 37




Chicago Collection™ Seattle Collection™

LEVEL BASE INSTALLATION OPTIONS for Advanced Track, Dual Track & Dri Track


FINISHED FLOOR

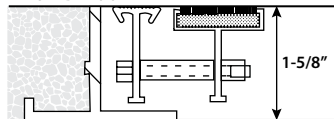

VV EMBEDDED FRAME

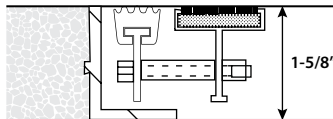

AD FRAME

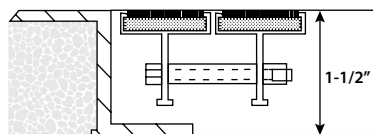

TT OVERLAP FRAME

NUWAY®

SURFACE/RECESSED SYSTEM

Ultra durable design and reversible for extended life

FEATURES	ZONES	1	2	3	4
Dual-strip design scrapes off debris and absorbs moisture					
Reversible design doubles life span					
Withstands heavy foot traffic and wheeled loads					
Numerous design and color options					
Anti-slip surface; ADA compliant					
Specific configurations available for Zone 1					
Common Uses—entryways in office buildings, retail stores, malls, supermarkets, hospitals, schools, banks					

SPECIFICATIONS

Material Alternating strips of aluminum scraper bars and wiper strips (buffed or unbuffed rubber)	Size Custom made to your requirements. Consult our Product Specialists for assistance.
	Thicknesses 7/16" or 11/16"
	Coefficient of Friction (D2047) 0.79

Depth	Ramp Frame	Schlüter™ Frame	Deep Frame
Grille Only	7/16"	7/16"	7/16" or 11/16"
Grille & Frame	7/16"	7/16" to 1-9/16"*	1-1/4"

**Varies based on model selected*

STYLES

Standard
12 mm or 17 mm, closed construction, Charcoal wiper strip, aluminum scraper bar

Plainguard
Unbuffed rubber wiper strip with aluminum scraper bar (Zones 1 & 2)

Design
Choice of colored buffed rubber wiper strip with aluminum scraper bar (Zone 2)

RECYCLED CONTENT
20% pre-consumer and 80% post-consumer

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 5 (1 point)
MR Credit 5 (1-2 points)	

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)



STANDARD
Closed Construction



PLAINGUARD
Optional Open Construction

Reversible for Extended Life

NUWAY® HD



Heavy duty, closed construction foot grille for heavy traffic with high point loads. Scraper bars are constructed of an extremely thick gauge aluminum extrusion and combined with dual wiper strips to produce a system ideal for hospitals, train stations, airports and more. Contact our Product Specialists for more information.



WIPER STRIPS



INSTALLATION OPTIONS

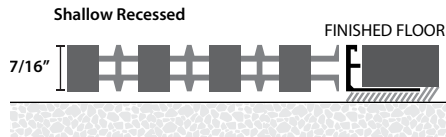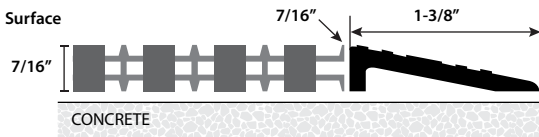


GRATE GRID

RECESSED SYSTEM


FEATURES	ZONES	1	2	3	4
Durable "I"-beam construction secured with key-lock bars Insert options include carpet, vinyl, brush, vinyl abrasive, and serrated aluminum; visit our website or consult our Product Specialists for assistance Common Uses—entryways					
SPECIFICATIONS					
Material 6063-T52 aluminum with 46% pre-consumer recycled content and various insert options					
Size Consult our Product Specialists for assistance					
Depth					
Grille Only	Grille & Frame				
1-3/4"	2"				
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)			



Vinyl Abrasive Insert Option





INSTALLATION

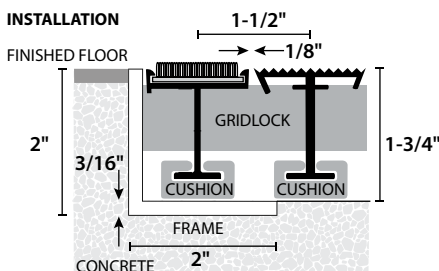

METROSTEEL™ GRATE

RECESSED SYSTEM


FEATURES	ZONES	1	2	3	4
Contemporary linear design Weather resistant stainless steel Maintenance-free surface Custom shapes available Common Uses—Entryways in office buildings, hotels, schools, transportation buildings, hospitals					
SPECIFICATIONS					
Material Type 304 stainless steel containing 80% pre-consumer recycled content		Size Custom made to your requirements. Consult our Product Specialists for assistance.			
Style Linear wire rails with resistance welded support rods		Thicknesses 5/8", 1-1/8"			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.3 (1 point)			
MR Credit 5 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)			

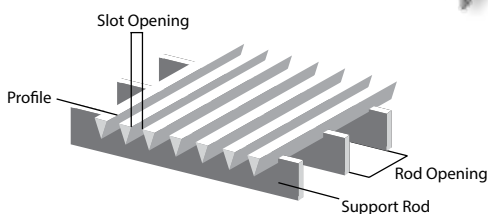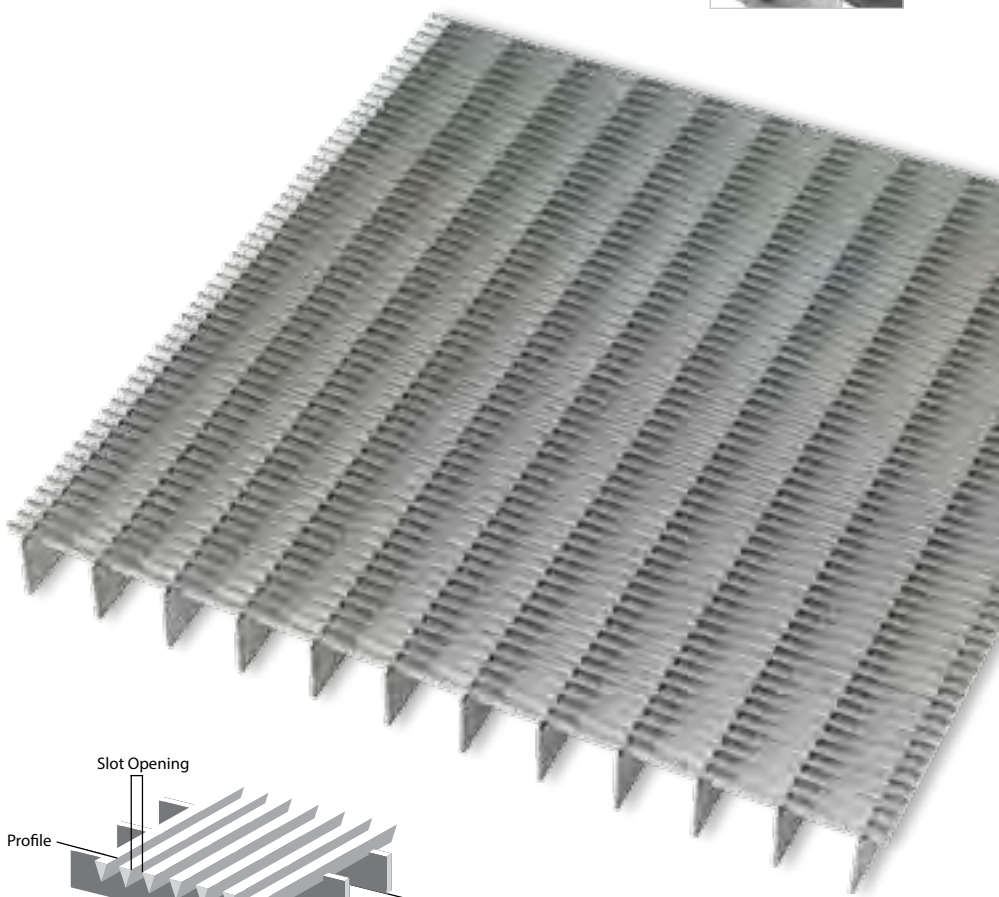

GRATE MAT

SURFACE/RECESSED SYSTEM


FEATURES	ZONES	1	2	3	4
Grate Mat "rolls up" for easy handling and maintenance Polypropylene brush insert offers highest performance and durability Insert options include carpet, vinyl, brush, vinyl abrasive, and serrated aluminum; visit our website or consult our Product Specialists for assistance Common Uses—interior entry ways					
SPECIFICATIONS ♻️					
Material 6063-T52 aluminum with 49% pre-consumer recycled content and various insert options Style Aluminum or rubber hinges		Size Custom made to your requirements. Consult our Product Specialists for assistance. Options Surface mount ramp frame or recessed frame			
Depth					
Grille Only	Grille & Ramp with Frame	Grille & Deep Frame			
3/8"	3/8"	7/16"			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)			

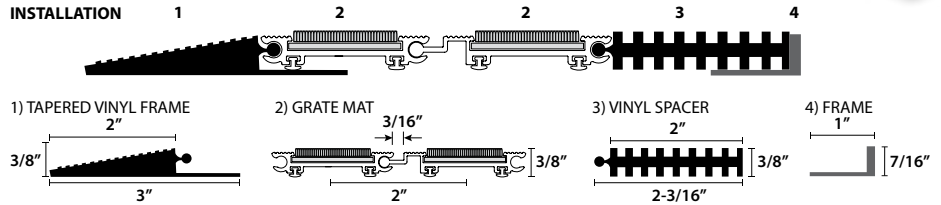

GRATE MAT XT

RECESSED SYSTEM

FEATURES	ZONES	1	2	3	4
The rugged benefits of a foot grille with the easy maintenance of a roll up mat Polypropylene brush insert offers highest performance and durability Thermoplastic hinge is weather-resistant and stays flexible—won't crack or break like PVC-based materials Insert options include carpet, vinyl, brush, vinyl abrasive and serrated aluminum Consult our Product Specialists for assistance Common Uses—interior entryways					
SPECIFICATIONS ♻️					
Material Corrosion-resistant 6063-T52 aluminum with 38.3-45.8% pre-consumer recycled content and various insert options fusion bonded to the backing for durability Additional Specs 6063-T52 aluminum spaced 1-1/2" on the center and connected with thermoplastic rubber hinges with 1/8" slotted holes for maximum drainage Size Custom made to your requirements. Consult our Product Specialists for assistance. Maximum Rolling Load Up to 1,000 lbs per wheel Depth					
Grille Only	Grille & Recessed Frame				
11/16"	3/4"				
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)			

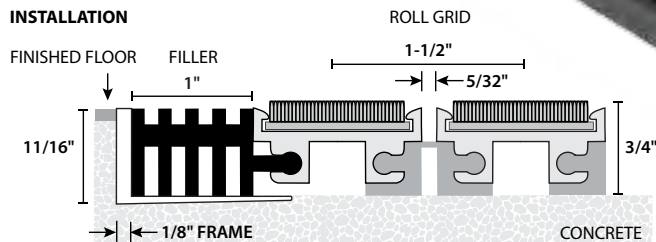

ULTRA ENTRY™

SURFACE/SHALLOW RECESSED SYSTEM



Superior alternative to aluminum roll mats

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

- Dual-strip design both scrapes off debris and absorbs moisture
- Easily cut on site to any angle, arc or shape
- Durable construction withstands heavy traffic
- Quiet—eliminates noise and clatter common with aluminum roll up mats
- Stable—conforms to uneven sub-floors
- Anti-slip surface for indoor applications; ADA compliant
- T section divider is optional for wheeled traffic applications
- Can be used with Schlüter™ frame option
- Common Uses—Entryways in supermarkets, retail stores, malls, office buildings, schools, hospitals, sports arenas, airports

SPECIFICATIONS

Material

Gray and Brown Bases—27.52% pre-consumer and 1.4% post-consumer recycled content with standard New York inserts

Black Base—86% pre-consumer and 1.4% post-consumer recycled content with standard New York inserts. Recycled content varies with Designer Insert Options

Size

36" x 40', 48" x 40'

Custom Sizes

36" and 48" widths x lengths to 40'

Weight

1.71 lbs/sq ft

Maximum Rolling Load

1,200 pounds per wheel

Depth	Surface Ramp Frame	Recessed R or J Frame
Grille Only	3/8"	3/8"
Grille & Frame	3/8"	R: 7/16" J: 5/8"

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)


IEQ Credit 5 (1 point)

MR Credit 5 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)

IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)

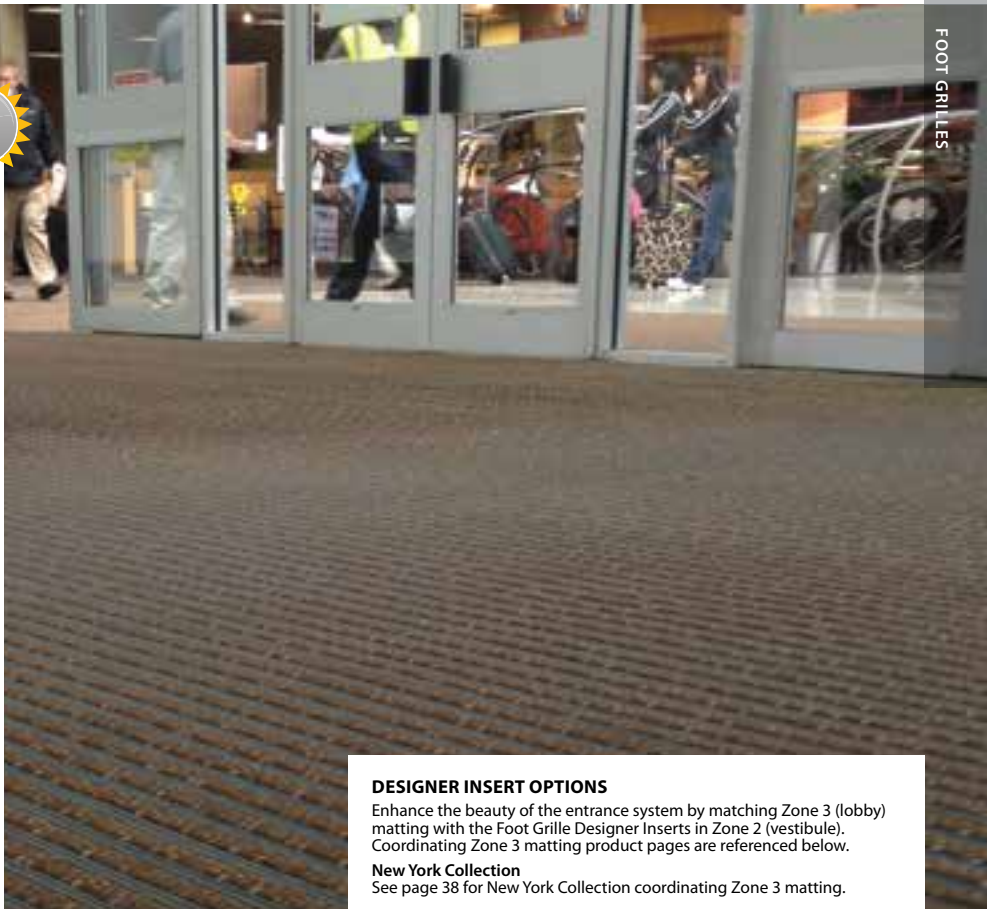

DESIGNER INSERT OPTIONS

Enhance the beauty of the entrance system by matching Zone 3 (lobby) matting with the Foot Grille Designer Inserts in Zone 2 (vestibule). Coordinating Zone 3 matting product pages are referenced below.

New York Collection

See page 38 for New York Collection coordinating Zone 3 matting.

PANELS



Gray



Black



Dark Gray




Light Gray



Charcoal Splash



Charcoal



Brown



Cocoa Butter



Cocoa



Brown Sugar



Brown



Black Panel with New York Charcoal Splash Insert



Black Panel with New York Charcoal Insert



Gray Panel with New York Charcoal Splash Insert




Brown Panel with New York Brown Sugar Insert





Brown Panel with New York Cocoa Butter Insert

INSTALLATION OPTIONS


Surface

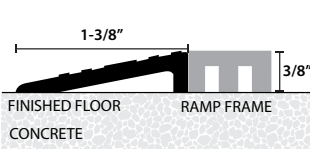

Shallow Recessed



OPTIONAL T SECTION DIVIDER




ROLL WIDTH	36' & 48'	ROLL LENGTH	40'

LEGACY

FEATURES	ZONES	1	2	3	4
<p>Patented hybrid product installs like a carpet and performs like a foot grille</p> <p>Can be cut to measure in any direction without fraying</p> <p>Combines top-of-the-line fibers that both scrape dirt and absorb moisture</p> <p>Inserts integrate with a variety of design schemes</p> <p>Common Uses—high traffic vestibules and foyers in retail stores, malls, office buildings, sports facilities, hotels, schools</p>					
SPECIFICATIONS 					
<p>Material Polypropylene Base Grid and Premium Polyamide Nylon Fibers (6.6) with 5.63% post-consumer recycled content</p> <p>Backing Anti-slip rubber</p> <p>Size 6' 7" x 65' 5" – to accommodate rib repeat in multiple applications, figure material at 6' 5"</p> <p>Custom Sizes 6' 7" width x lengths to 65' 5"</p>	<p>Weight 103 oz/sq yd</p> <p>Thickness 9/16"</p> <p>Pattern Repeat</p> <p>Recommended Installation Loose lay—Ultra Flex Nosing Glue down—Mats Inc. Multi-Bond Adhesive</p> <p>Custom Colors Other non-stocking colors available; minimums may apply</p>				
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point)				IEQ Credit 5 (1 point)
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					

ROLL WIDTH	6' 7"		ROLL LENGTH
			
			
			
			65' 5"

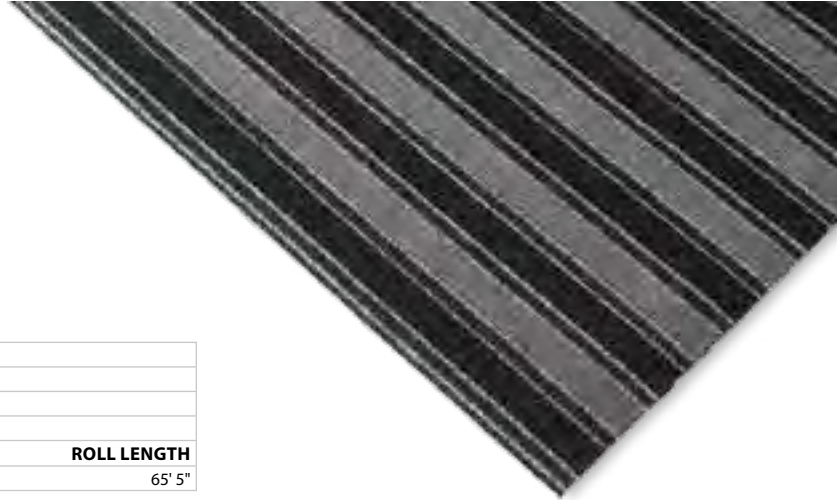


Cool Gray



Bright Carbon




Fall Brown




Ultra-Flex Nosing

LEGACY NOP


Use with matching Supreme Nop colors in Zone 3 for an attractive and coordinated entrance system

FEATURES	ZONES	1	2	3	4
<p>Patented hybrid product installs like a carpet and performs like a foot grille</p> <p>Can be cut to measure in any direction without fraying</p> <p>Combines top-of-the-line fibers that both scrape dirt and absorb moisture</p> <p>Common Uses—high traffic vestibules and foyers in retail stores, malls, office buildings, sports facilities, schools</p>					
SPECIFICATIONS 					
<p>Material 100% polypropylene with 5.63% post-consumer recycled content</p> <p>Backing Anti-slip rubber</p> <p>Size 6' 7" x 65' 5" – to accommodate rib repeat in multiple applications, calculate material using 6' 5"</p> <p>Custom Sizes 6' 7" width x lengths to 65' 5"</p>	<p>Weight 103 oz/sq yd</p> <p>Thickness 9/16"</p> <p>Pattern Repeat</p> <p>Recommended Installation Loose lay—Ultra Flex Nosing Glue down—Mats Inc. Multi-Bond Adhesive</p> <p>Custom Colors Other non-stocking colors available; minimums may apply</p>				
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point)				IEQ Credit 5 (1 point)
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					



Supreme Nop

ROLL WIDTH	6' 7"		ROLL LENGTH
			
			
			
			65' 5"



Gray-Black




Charcoal



Black Walnut



Ultra-Flex Nosing

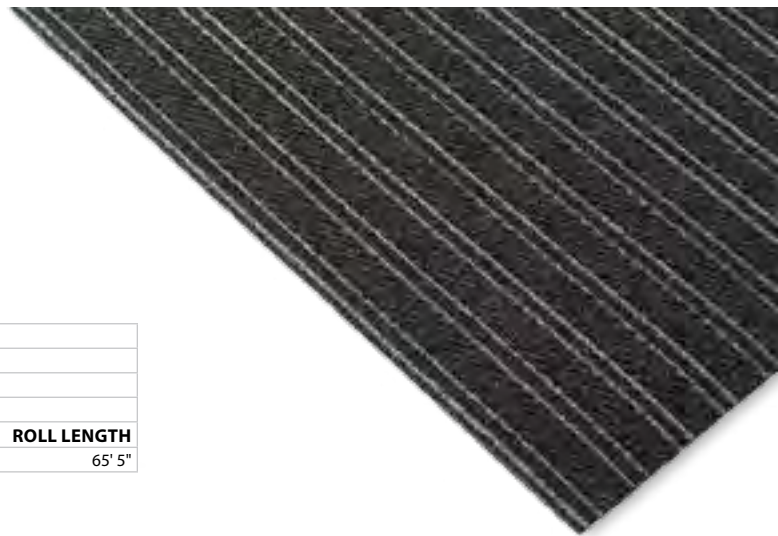

LEGACY PLANK

FEATURES	ZONES	1	2	3	4
<p>The plank-style matting system can be used to construct an entrance of any size</p> <p>One color for a uniform look or work with both colors to create interesting patterns</p> <p>Create a uniform look with a single color or work with both colors to construct interesting patterns</p> <p>Less waste than roll matting, depending on the size</p>					
SPECIFICATIONS ♻️					
<p>Material Polypropylene base with premium polyamide nylon fibers (6.6)</p> <p>Backing Bitumen</p> <p>Size 9.25" x 29.53"</p> <p>Legacy Tile Weight 168 oz/sq yd</p> <p>Liberty Tile Weight 236 oz/sq yd</p>		<p>Thickness 9/16"</p> <p>Recommended Installation Clip system with double-faced tape, glue-down for heavy and wheeled traffic</p>			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
<p>MR Sourcing of Raw Materials (up to 2 points)</p> <p>IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)</p> <p>IEQ Low-Emitting Materials (up to 3 points)</p>					

CLIP SYSTEM



Anthracite

Gray

LIBERTY PLANK (WITH ALUMINUM STRIPS)




Anthracite

Gray

LEGEND

Great alternative to aluminum for Zone 1					
FEATURES	ZONES	1	2	3	4
<p>Ideal for outdoors—coarse inserts scrape away dirt before it gets in the building</p> <p>Drop-through design allows dirt to pass through material</p> <p>Common Uses—entryways in ski resorts, sports facilities, office buildings</p>					
SPECIFICATIONS ♻️					
<p>Material Polypropylene base grid and premium polyamide nylon fibers (6.6)</p> <p>Backing High density anti-slip rubber</p> <p>Size 6' 7" x 65' 5" – to accommodate rib repeat in multiple applications, calculate material using 6' 5"</p> <p>Custom Sizes 6' 7" width x lengths to 65' 5"</p>		<p>Weight 106 oz/sq yd</p> <p>Thickness 9/16"</p> <p>Pattern Repeat</p> <p>Recommended Installation Loose lay—Ultra Flex Nosing</p> <p>Custom Colors Other non-stocking colors available; minimums may apply</p>			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
<p>MR Sourcing of Raw Materials (1 point)</p> <p>IEQ Enhanced Indoor Air Quality Strategies (1 point)</p>					

Coordinate with Legacy or Legacy Nop in Zone 2 for an impressive entrance



Charcoal/Gray

ROLL WIDTH	6' 7"		ROLL LENGTH	65' 5"

SOFT GRID™

SURFACE/SHALLOW RECESSED SYSTEM

FEATURES	ZONES	1	2	3	4
Durable construction withstands heavy traffic Easily cut on site to any angle, arc or shape Stable—conforms to uneven sub-floors Quiet—eliminates noise common with aluminum roll-up mats Anti-slip surface for indoor applications; ADA compliant Can be used with Schlüter™ frame Common Uses—Entryways in supermarkets, retail stores, malls, office buildings, schools, hospitals, factories, airports					
SPECIFICATIONS ♻️					
Material Vinyl drop-thru panel 100% pre-consumer recycled content in Black; 32% pre-consumer recycled content in Gray					
Size 36" x 30', 48" x 30'					
Custom Sizes 36" and 48" widths x lengths to 30'					
Weight 1.35 lbs/sq ft					
Maximum Rolling Load 1,200 per pounds wheel					
Depth	Surface Ramp Frame	Recessed R or J Frame			
Grille Only	3/8"	3/8"			
Grille & Frame	3/8"	R: 7/16" J: 5/8"			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)			




Gray
Standard Color

Black

ROLL WIDTH	36" & 48"		
		ROLL LENGTH	
		30'	


INSTALLATION OPTIONS

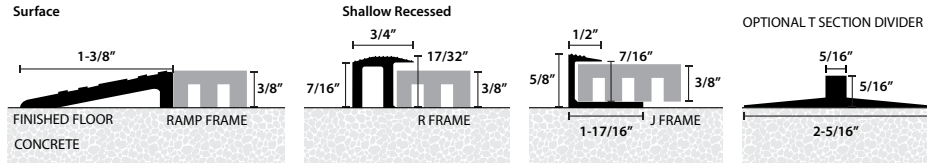

3M™ NOMAD™

SCRAPER MATTING

2500

FEATURES	ZONES	1	2	3	4
Removes heavy soil and debris before it makes it in your facility Prolongs the life of your indoor carpeted matting Safety/reduced liability Easy to clean Unbacked for flow through means less maintenance to mat					
 Authorized Master Distributor Entrance and Work Area Matting					
SPECIFICATIONS ♻️					
Standard Mat Sizes 4' x 6', 4' x 3'					
Roll Size 4' x 40'					
Widths wider than 4' require seaming					
Edging Heat emboss and Ultra-Flex edging available					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)			



Black



3M™ NOMAD™ MEDIUM TRAFFIC SCRAPER MATTING 6050

Durable vinyl construction performs in temperatures from -10°F to 150°F (-23°C to 65°C)

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Designed for MEDIUM traffic conditions
Up to 400,000 people/year
Vinyl loops scrape, trap and hide dirt and moisture, minimizing re-tracking into the building
Cushioned vinyl backing protects floors from removed soil and will not stain flooring
Durable vinyl construction performs in temperatures from -10°F to 150°F (-23°C to 65°C)
Fade resistant

3M
Authorized Master Distributor
Entrance and Work Area Matting

SPECIFICATIONS

Roll Sizes

3' and 4' x 60'
Longer rolls readily available
† Logo colors 4' x 60'

Standard Mat Sizes

3' x 5', 4' x 6', 3' x 20', 4' x 20'

Custom Sizes

3' and 4' widths x custom lengths up to 60'
† Logo colors 4' width x custom lengths up to 20'
* Red, Blue and Green 3' width x custom lengths up to 20'
Seaming is also available


POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)

EDGING
Standard
Heat embossed on all sides
Custom Options Available

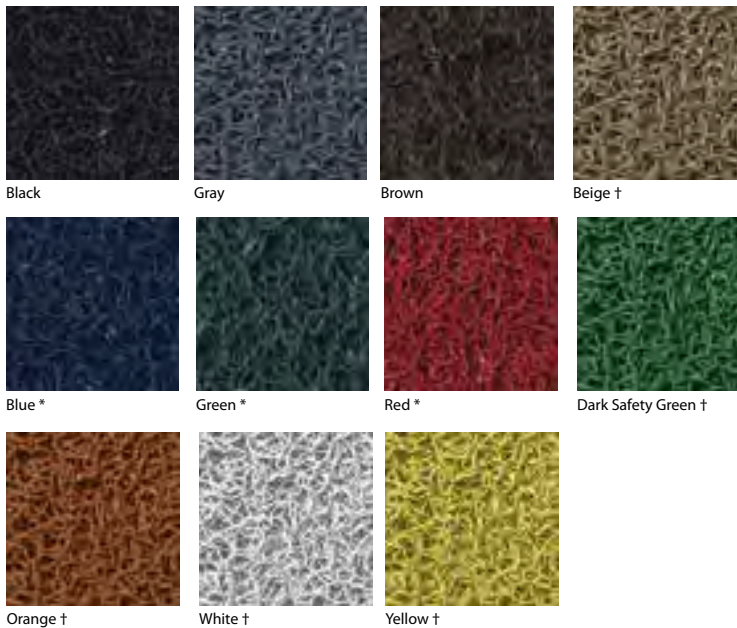

3M™ NOMAD™ HEAVY TRAFFIC UNBACKED SCRAPER MATTING 8100 & 3M™ NOMAD™ HEAVY TRAFFIC BACKED SCRAPER MATTING 8150

Best 3M™ Nomad™ Scraper Matting for removing and hiding dirt in heavy traffic areas

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Designed for HEAVY traffic conditions
Up to 1,000,000 people/year
Durable vinyl loops scrape, trap and hide dirt and moisture, minimizing re-tracking into the building
Provides resistance to grease and oil
8150 Backed mat can be used for indoor applications and protects floor surfaces in Zone 3

3M
Authorized Master Distributor
Entrance and Work Area Matting

SPECIFICATIONS

Roll Sizes

3' and 4' widths x 60' length
Longer rolls readily available

Standard Mat Sizes

3' x 5', 4' x 6', 3' x 20', 4' x 20'

Custom Sizes

3' and 4' widths x custom lengths up to 60'
Seaming is also available

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)



POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)

EDGING
Standard
For 3' x 5' and 4' x 6' mats in Black, Gray and Brown
8150
Heat embossed on all sides
8100
Heat embossed on short sides
Custom Options Available




3M™ NOMAD™ Z-WEB MEDIUM TRAFFIC SCRAPER MATTING 6250

Effectively traps moisture and will not stain floor					
FEATURES	ZONES	1	2	3	4
Designed for MEDIUM traffic conditions Up to 400,000 people/year Peaked edge design provides enhanced slip resistance while scraping dirt and debris Solid vinyl backing helps protect floors from removed soil and will not stain the floor Durable z-web construction provides excellent support for light wheeled traffic such as carts and wheelchairs Effectively traps and holds moisture making it ideal for use by drink stations and water fountains  Authorized Master Distributor Entrance and Work Area Matting					
SPECIFICATIONS 					
Roll Sizes 3' and 4' x 60' Longer rolls readily available Standard Mat Sizes 3' x 5', 4' x 6' Custom Sizes 3' and 4' widths x custom lengths up to 60'					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					





Gray



Brown

EDGING
 Standard
 Heat embossed on all sides
 Custom Options Available

3M™ NOMAD™ Z-WEB EXTREME TRAFFIC SCRAPER MATTING 9100


Best 3M™ Nomad™ Scraper Matting for extreme traffic outdoors and in recessed well applications					
FEATURES	ZONES	1	2	3	4
Designed for EXTREME traffic conditions Up to and greater than 1,000,000 people/year Unbacked construction scrapes, traps and hides dirt and debris, minimizing re-tracking into the building Peaked edge design provides enhanced slip resistance Durable z-web construction provides excellent support for light wheeled traffic such as carts and wheelchairs  Authorized Master Distributor Entrance and Work Area Matting					
SPECIFICATIONS 					
Roll Sizes 2' and 3' x 50' Longer rolls readily available Standard Mat Sizes 2' x 20' (Gray only), 3' x 5', 3' x 20' Custom Sizes 2' and 3' widths x custom lengths up to 50' Edging Not Recommended					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					



Black






Gray



Brown

3M™ NOMAD™ MODULAR MATTING 9200

Easy-to-install modular tile for recessed well applications					
FEATURES	ZONES	1	2	3	4
Designed for MEDIUM traffic conditions Up to 400,000 people/year High-performance, flexible tiles with a vinyl base and dual-fiber carpet strips scrape, remove and capture dirt and moisture Resistance to mildew and UV aging Tiles easily snap together and can be cut for custom fit Grooves are large enough to effectively trap dirt but small enough to prevent high heels from getting stuck  Authorized Master Distributor Entrance and Work Area Matting					
SPECIFICATIONS 					
Tile Size 7.87" x 7.87" Case Pack 10 tiles (4.3 sq ft) per case Edging Not recommended					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

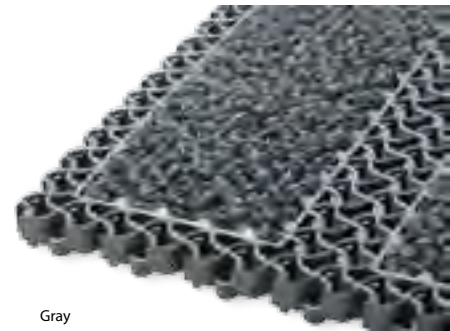

Gray



ENTRANCE SYSTEMS & MATTING

TILES



TRILOGY TILE

TRILogy TILE™



Superior matting tile with contemporary carpet design

FEATURES	ZONES	1	2	3	4
Aggressive scraping cleans footwear to reduce the risk of slips and falls					
Durable product ideal for commercial applications					
High-end carpet-like appearance creates great first impression					
Meets indoor air quality testing protocols					
Class 1 fire rating					
Common Uses—corporate, educational, retail, hospitality environments					



SPECIFICATIONS

Material Nylon fiber (6) textured tufted loop	Weight 139 oz/sq yd
Backing 100% post-consumer recycled PET primary backing and Bitumen secondary backing with 10% post-industrial recycled content	Thickness 9/32"
Tile Size 19-11/16" x 19-11/16"	Recommended Installation Brick, Monolithic, Quarter-Turn
Case Pack 20 tiles/case (53.8 sq ft)—full cases only	Adhesive Mats Inc. Release-Bond Adhesive

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point)
	IEQ Credit 4.3 (1 point)
	IEQ Credit 5 (1 point)

POSSIBLE LEED V 4 CREDITS


MR Sourcing of Raw Materials (up to 2 points)
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
IEQ Low-Emitting Materials (up to 3 points)



Oyster



Truffles

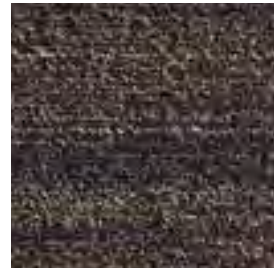


Portabello




JOURNEY TILE™

Superior matting tile with contemporary carpet design					
FEATURES	ZONES	1	2	3	4
Bold regency stripe design for stylish interiors Dual fiber construction scrapes off dirt and absorbs moisture Class 1 fire rating Endless installation pattern options Developed for medium to heavy traffic commercial applications Common Uses—corporate, educational, retail, hospitality environments					
SPECIFICATIONS ♻️					
Material Nylon fiber (6) textured tufted loop		Weight 157 oz/sq yd			
Backing Vinyl composite material reinforced with fiberglass		Thickness 5/16"			
Tile Size 24" x 24"		Recommended Installation Ashlar, Brick, Quarter-Turn, Ashlar Quarter-Turn			
Case Pack 18 tiles/case (72 sq ft)—full cases only		Adhesive Mats Inc. Release-Bond Adhesive			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point)			
MR Credit 5 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					
IEQ Low-Emitting Materials (up to 3 points)					

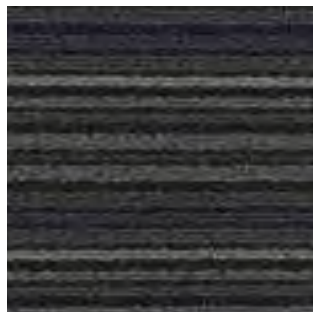

Acacia Blue

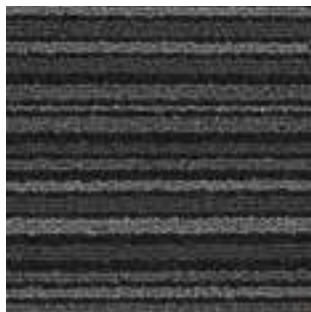

Denali Gray



Galapagos Green



Sahara Brown


INSTALLATION PATTERNS



Quarter-Turn



Ashlar Quarter-Turn

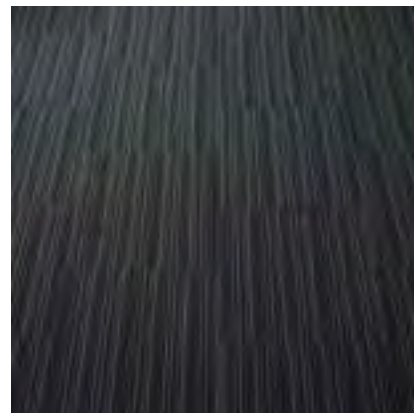

Brick



SUPER NOP® 52 TILE

Most durable and effective matting tile in the industry

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Produced with 100% Asota® solution dyed polypropylene fibers for unbeatable resistance to wear, UV and staining (bleach, salt, permanent ink, coffee, red juice, betadine and more).

52 oz. heavy weight pile and large nop design provides outstanding scrubbing action.

Needlepunch construction provides optimal crush resistance.

Edges will not unravel or fray.

Common Uses—high traffic entrances, vestibules, lobbies, airports, retail

SPECIFICATIONS

Material
100% Asota® solution-dyed UV stabilized polypropylene fibers with 20% post-consumer recycled content

Backing
Eco-Bitumen

Tile Size
19-11/16" x 19-11/16"

Case Pack
12 tiles/case (32.4 sq ft)—full cases only

Weight
141 oz/sq yd

Thickness
1/2"

Recommended Installation
Quarter-turn tiles (parquet pattern)

Adhesive
Mats Inc. Release-Bond Adhesive or Success Tape


POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)


IEQ Credit 4.1 (1 point)
IEQ Credit 4.3 (1 point)
IEQ Credit 5 (1 point)

POSSIBLE LEED V 4 CREDITS


MR Sourcing of Raw Materials (up to 2 points)
MR Environmental Product Declarations (up to 2 points)
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
IEQ Low-Emitting Materials (up to 3 points)




Autumn




Beige




Grijis/Charcoal




Hunter Green




Steel Blue




Sterling




Walnut




Zinc



Black Walnut



Midnight Blue




Tweed Brown




Autumn Red

BERBER TILE


FEATURES	ZONES	1	2	3	4		
<p>Outstanding walk-off performance for multi-directional traffic applications Easily maintained by vacuuming and periodic extraction Stain-resistant, color fast, and permanently anti-static Green Label Plus™ Certified Common Uses—entryways, vestibules</p>							
<p>SPECIFICATIONS ♻️</p> <table border="1"> <tr> <td> <p>Material 100% solution-dyed UV stabilized polypropylene fibers with 56.93% post-consumer recycled content</p> <p>Backing Bitumen</p> <p>Tile Sizes 19-11/16" x 19-11/16"</p> <p>Case Pack 20 tiles/case (54 sq ft)—full cases only</p> <p>Thickness 3/8"</p> </td> <td> <p>Weight 129.8 oz/sq yd</p> <p>Recommended Installation Quarter-turn tiles (parquet pattern)</p> <p>Adhesive Mats Inc. Release-Bond Adhesive or Success Tape</p> <p>Custom Also available in roll goods, see page 29</p> </td> </tr> </table>						<p>Material 100% solution-dyed UV stabilized polypropylene fibers with 56.93% post-consumer recycled content</p> <p>Backing Bitumen</p> <p>Tile Sizes 19-11/16" x 19-11/16"</p> <p>Case Pack 20 tiles/case (54 sq ft)—full cases only</p> <p>Thickness 3/8"</p>	<p>Weight 129.8 oz/sq yd</p> <p>Recommended Installation Quarter-turn tiles (parquet pattern)</p> <p>Adhesive Mats Inc. Release-Bond Adhesive or Success Tape</p> <p>Custom Also available in roll goods, see page 29</p>
<p>Material 100% solution-dyed UV stabilized polypropylene fibers with 56.93% post-consumer recycled content</p> <p>Backing Bitumen</p> <p>Tile Sizes 19-11/16" x 19-11/16"</p> <p>Case Pack 20 tiles/case (54 sq ft)—full cases only</p> <p>Thickness 3/8"</p>	<p>Weight 129.8 oz/sq yd</p> <p>Recommended Installation Quarter-turn tiles (parquet pattern)</p> <p>Adhesive Mats Inc. Release-Bond Adhesive or Success Tape</p> <p>Custom Also available in roll goods, see page 29</p>						
<p>POSSIBLE LEED V 2009 CREDITS</p> <table border="1"> <tr> <td>MR Credit 4 (1-2 points)</td> <td>IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)</td> </tr> </table>						MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)
MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)						
<p>POSSIBLE LEED V 4 CREDITS</p> <p>MR Sourcing of Raw Materials (up to 2 points) MR Environmental Product Declarations (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)</p>							

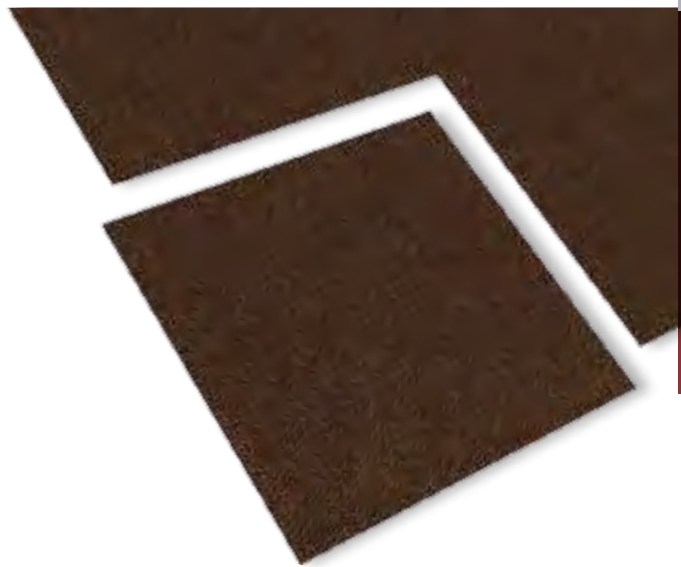

Charcoal





Walnut




Steel Blue

DIAGONAL TILE


Aggressive scraping action with long life							
FEATURES	ZONES	1	2	3	4		
<p>Diagonal rib design scrapes dirt and moisture from all types of footwear Dimensionally stable—won't shrink or curl Common Uses—high traffic entrances, vestibules, lobbies, retail stores, airports, fitness rooms, wall-to-wall applications</p>							
<p>SPECIFICATIONS ♻️</p> <table border="1"> <tr> <td> <p>Material 100% solution-dyed UV stabilized polypropylene fibers with 52.05% post-consumer recycled content</p> <p>Backing Bitumen</p> <p>Tile Size 19-11/16" x 19-11/16"</p> <p>Case Pack 20 tiles/case (54 sq ft)—full cases only</p> </td> <td> <p>Weight 131 oz/sq yd</p> <p>Thickness 3/8"</p> <p>Recommended Installation Quarter-turn tiles (parquet pattern)</p> <p>Adhesive Mats Inc. Release-Bond Adhesive or Success Tape</p> <p>Custom Also available in roll goods, minimums may apply</p> </td> </tr> </table>						<p>Material 100% solution-dyed UV stabilized polypropylene fibers with 52.05% post-consumer recycled content</p> <p>Backing Bitumen</p> <p>Tile Size 19-11/16" x 19-11/16"</p> <p>Case Pack 20 tiles/case (54 sq ft)—full cases only</p>	<p>Weight 131 oz/sq yd</p> <p>Thickness 3/8"</p> <p>Recommended Installation Quarter-turn tiles (parquet pattern)</p> <p>Adhesive Mats Inc. Release-Bond Adhesive or Success Tape</p> <p>Custom Also available in roll goods, minimums may apply</p>
<p>Material 100% solution-dyed UV stabilized polypropylene fibers with 52.05% post-consumer recycled content</p> <p>Backing Bitumen</p> <p>Tile Size 19-11/16" x 19-11/16"</p> <p>Case Pack 20 tiles/case (54 sq ft)—full cases only</p>	<p>Weight 131 oz/sq yd</p> <p>Thickness 3/8"</p> <p>Recommended Installation Quarter-turn tiles (parquet pattern)</p> <p>Adhesive Mats Inc. Release-Bond Adhesive or Success Tape</p> <p>Custom Also available in roll goods, minimums may apply</p>						
<p>POSSIBLE LEED V 2009 CREDITS</p> <table border="1"> <tr> <td>MR Credit 4 (1-2 points)</td> <td>IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)</td> </tr> </table>						MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)
MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)						
<p>POSSIBLE LEED V 4 CREDITS</p> <p>MR Sourcing of Raw Materials (up to 2 points) MR Environmental Product Declarations (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)</p>							

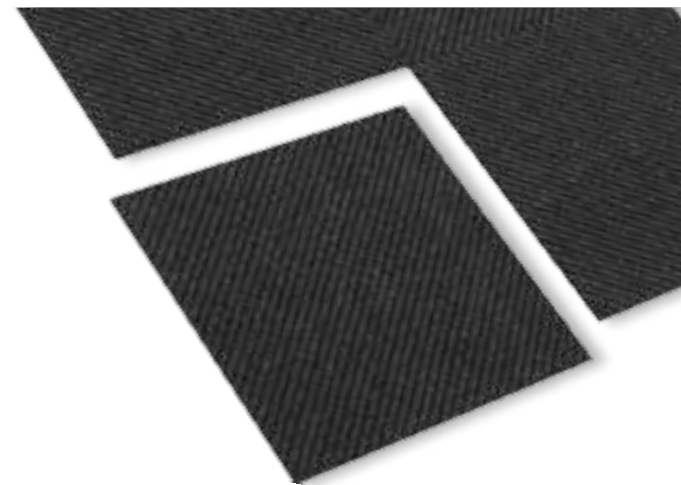


Charcoal




Blue



Black Walnut




Gray




Espresso



Bronze





Beige




Lichen

CALYPSO TILE


FEATURES	ZONES	1	2	3	4
Removes dirt and moisture in multi-directional traffic applications Dimensionally stable, won't shrink or curl Common Uses—high traffic entrances, vestibules, lobbies, retail stores, airports, wall-to-wall applications					
SPECIFICATIONS 					
Material 100% solution-dyed UV stabilized polypropylene fibers with 56.93% post-consumer recycled content		Weight 129.8 oz/sq yd			
Backing Bitumen		Thickness 3/8"			
Tile Size 19-11/16" x 19-11/16"		Recommended Installation Quarter-turn tiles (parquet pattern)			
Case Pack 20 tiles/case (54 sq ft)—full cases only		Adhesive Mats Inc. Release-Bond Adhesive or Success Tape			
Custom Also available in roll goods, minimums may apply					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point)			
		IEQ Credit 4.3 (1 point)			
		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
MR Environmental Product Declarations (up to 2 points)					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					
IEQ Low-Emitting Materials (up to 3 points)					



Anthracite





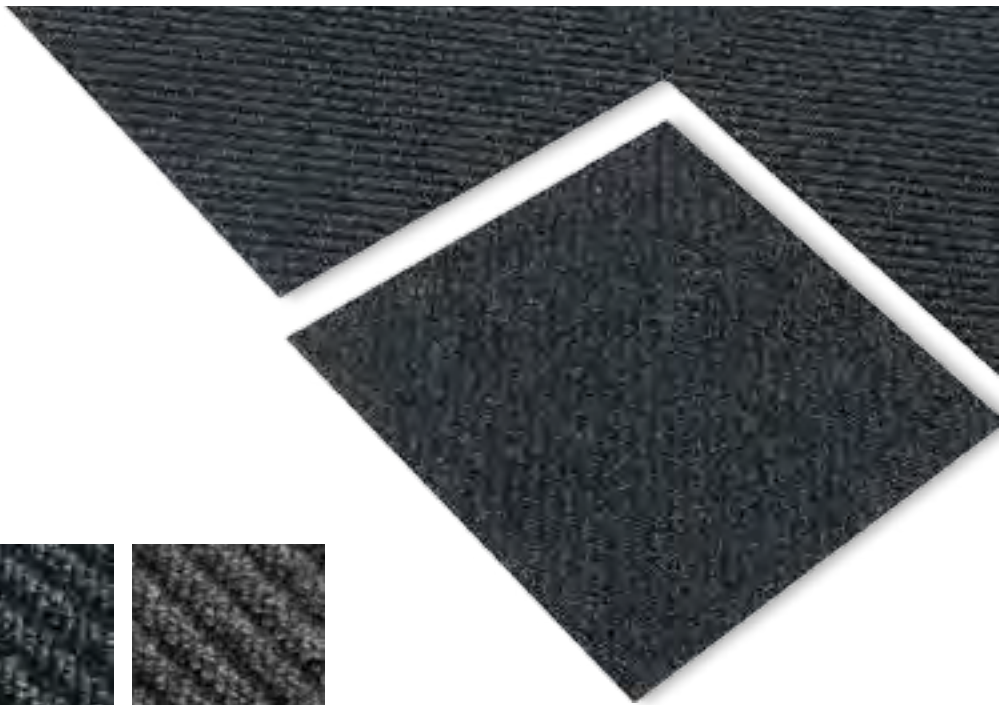
Lichen



Chestnut

SLIP NOT 2000 TILE

FEATURES	ZONES	1	2	3	4
Slip Not 2000 provides a durable solution for the most demanding entryways Unmatched walk-off performance Protects against hazardous slips and falls Common Uses—high traffic entrances, vestibules, lobbies, retail stores, airports, supermarkets					
SPECIFICATIONS 					
Material 100% solution-dyed UV stabilized polypropylene fibers with 52.07% post-consumer recycled content		Weight 152.18 oz/sq yd			
Backing Bitumen		Thickness 1/2"			
Tile Size 19-11/16" x 19-11/16"		Recommended Installation Quarter-turn tiles (parquet pattern)			
Case Pack 12 tiles/case (32.4 sq ft)—full cases only		Adhesive Mats Inc. Release-Bond Adhesive or Success Tape			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point)			
		IEQ Credit 4.3 (1 point)			
		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
MR Environmental Product Declarations (up to 2 points)					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					
IEQ Low-Emitting Materials (up to 3 points)					



Charcoal



Dark Gray

ENTERPRISE TILE™

FEATURES	ZONES	1	2	3	4
<p>Extremely durable, hard-wearing tile Blended fibers provide superior scraping action Ideal for wall-to-wall applications as well as entrances Common Uses—high traffic entrances, vestibules, lobbies, retail stores</p>					
<p>SPECIFICATIONS ♻️</p>					
<p>Material 100% polypropylene with 15% pre-consumer and 15% post-consumer recycled content</p>		<p>Weight 160 oz/sq yd</p>			
<p>Backing Bitumen</p>		<p>Thickness 3/8"</p>			
<p>Tile Size 19-11/16" x 19-11/16"</p>		<p>Adhesive Mats Inc. Release-Bond Adhesive</p>			
<p>Case Pack 16 tiles/case (43.20 sq ft)—full cases only</p>					
<p>POSSIBLE LEED V 2009 CREDITS</p>					
<p>MR Credit 4 (1-2 points)</p>		<p>IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>			
<p>POSSIBLE LEED V 4 CREDITS</p>					
<p>MR Sourcing of Raw Materials (up to 2 points) MR Environmental Product Declarations (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)</p>					




Anthracite



TIRE TILE

FEATURES	ZONES	1	2	3	4
<p>Environmentally-friendly, made from recycled tires Wheeled traffic moves efficiently across the surface Traps dirt, absorbs moisture and protects floors Low maintenance Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets</p>					
<p>SPECIFICATIONS ♻️</p>					
<p>Material Recycled Rubber Tire Strips with 80% post-consumer recycled content</p>		<p>Weight 2 lbs/sq ft</p>			
<p>Backing Non-flammable solid adhesive base</p>		<p>Thickness 3/8"</p>			
<p>Style Buffed, chenille-like fluff cord</p>		<p>Recommended Installation Quarter-turn tiles (parquet pattern)</p>			
<p>Tile Size 12" x 12"</p>		<p>Adhesive Urethane Bond Rubber Flooring Adhesive</p>			
<p>Case Pack 25 tiles/case (25 sq ft)—full cases only</p>					
<p>POSSIBLE LEED V 2009 CREDITS</p>					
<p>MR Credit 4 (1-2 points) MR Credit 5 (1-2 points)</p>		<p>IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)</p>			
<p>POSSIBLE LEED V 4 CREDITS</p>					
<p>MR Sourcing of Raw Materials (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)</p>					



Earth Tone





GEO TILE

FEATURES	ZONES	1	2	3	4						
<p>Geometric pattern offers outstanding cleaning performance by containing dirt and moisture Rubber-reinforced pattern prevents pile from crushing, extending product life Ideal for surface mount or recessed installations Damaged or worn tiles may be replaced easily Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets</p>											
<p>SPECIFICATIONS ♻️</p> <table border="0"> <tr> <td style="vertical-align: top;"> <p>Material 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p>Backing SBR rubber</p> <p>Tile Size 18" x 18"</p> <p>Thickness 1/4" or 7/16"</p> </td> <td style="vertical-align: top;"> <p>Case Pack 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p>Weight 1/4" = 0.56 lb/sq ft 7/16" = 0.98 lb/sq ft</p> <p>Adhesive Mats Inc. Perma-Bond Adhesive</p> </td> </tr> </table>						<p>Material 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p>Backing SBR rubber</p> <p>Tile Size 18" x 18"</p> <p>Thickness 1/4" or 7/16"</p>	<p>Case Pack 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p>Weight 1/4" = 0.56 lb/sq ft 7/16" = 0.98 lb/sq ft</p> <p>Adhesive Mats Inc. Perma-Bond Adhesive</p>				
<p>Material 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p>Backing SBR rubber</p> <p>Tile Size 18" x 18"</p> <p>Thickness 1/4" or 7/16"</p>	<p>Case Pack 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p>Weight 1/4" = 0.56 lb/sq ft 7/16" = 0.98 lb/sq ft</p> <p>Adhesive Mats Inc. Perma-Bond Adhesive</p>										
<p>POSSIBLE LEED V 2009 CREDITS</p> <table border="0"> <tr> <td>MR Credit 5 (1-2 points)</td> <td>IEQ Credit 4.1 (1 point)</td> <td colspan="4">IEQ Credit 5 (1 point)</td> </tr> </table>						MR Credit 5 (1-2 points)	IEQ Credit 4.1 (1 point)	IEQ Credit 5 (1 point)			
MR Credit 5 (1-2 points)	IEQ Credit 4.1 (1 point)	IEQ Credit 5 (1 point)									
<p>POSSIBLE LEED V 4 CREDITS</p> <p>MR Sourcing of Raw Materials (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)</p>											



AQUA BLOCK TILE

FEATURES	ZONES	1	2	3	4						
<p>Unique rigid construction effectively removes and traps dirt and moisture Rubber-reinforced pattern prevents pile from crushing, extending product life Anti-slip surface, even when wet Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets</p>											
<p>SPECIFICATIONS ♻️</p> <table border="0"> <tr> <td style="vertical-align: top;"> <p>Material 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p>Backing Molded rubber</p> <p>Tile Size 18" x 18"</p> <p>Thickness 1/4" or 7/16"</p> </td> <td style="vertical-align: top;"> <p>Case Pack 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p>Weight 1/4" = 0.85 lb/sq ft 7/16" = 1.49 lbs/sq ft</p> <p>Adhesive Mats Inc. Perma-Bond Adhesive</p> </td> </tr> </table>						<p>Material 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p>Backing Molded rubber</p> <p>Tile Size 18" x 18"</p> <p>Thickness 1/4" or 7/16"</p>	<p>Case Pack 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p>Weight 1/4" = 0.85 lb/sq ft 7/16" = 1.49 lbs/sq ft</p> <p>Adhesive Mats Inc. Perma-Bond Adhesive</p>				
<p>Material 100% solution-dyed low static polypropylene (molded and reinforced)</p> <p>Backing Molded rubber</p> <p>Tile Size 18" x 18"</p> <p>Thickness 1/4" or 7/16"</p>	<p>Case Pack 1/4" = 12 tiles/case (27 sq ft)—full cases only 7/16" = 10 tiles/case (22.5 sq ft)—full cases only</p> <p>Weight 1/4" = 0.85 lb/sq ft 7/16" = 1.49 lbs/sq ft</p> <p>Adhesive Mats Inc. Perma-Bond Adhesive</p>										
<p>POSSIBLE LEED V 2009 CREDITS</p> <table border="0"> <tr> <td>MR Credit 5 (1-2 points)</td> <td>IEQ Credit 4.1 (1 point)</td> <td colspan="4">IEQ Credit 5 (1 point)</td> </tr> </table>						MR Credit 5 (1-2 points)	IEQ Credit 4.1 (1 point)	IEQ Credit 5 (1 point)			
MR Credit 5 (1-2 points)	IEQ Credit 4.1 (1 point)	IEQ Credit 5 (1 point)									
<p>POSSIBLE LEED V 4 CREDITS</p> <p>MR Sourcing of Raw Materials (up to 2 points) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)</p>											

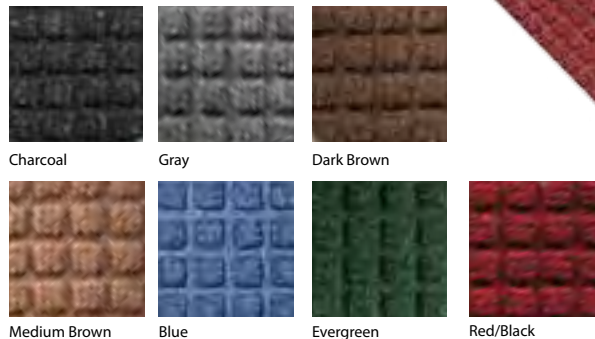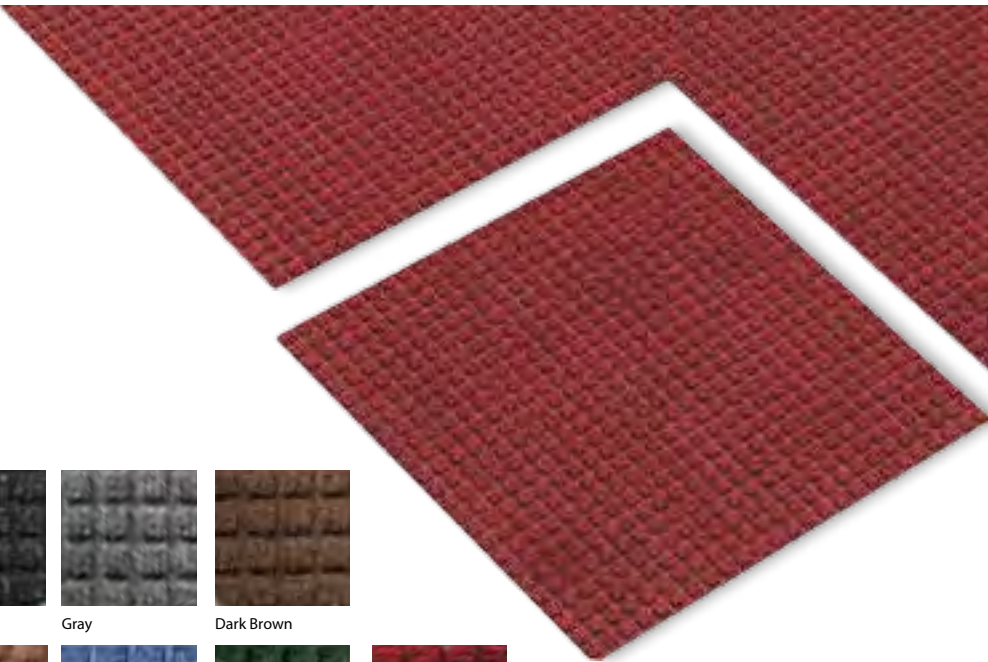

ENTRANCE SYSTEMS & MATTING

MATting: ROLL GOODS & MATS



SUPREME NOP



CHICAGO COLLECTION™ RB & SEATTLE COLLECTION™ RB

Wide format nylon matting for larger entrances

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Tufted nylon fibers remove debris and moisture from footwear
 Deeply saturated colors and the luxurious appearance of carpet
 Common Uses—indoor settings, entrances, foyers, vestibules, lobbies

SPECIFICATIONS ♻️

<p>Material 100% premium polyamide nylon fibers with 10% post-consumer recycled content</p> <p>Backing Anchor™ rubber backing Available with vinyl backing. See Page 40.</p> <p>Roll Size 6' 7" x 68' 13' 2" x 68'</p> <p>Custom Sizes 6' 7" and 13' 2" widths x custom lengths up to 68'</p>	<p>Weight 56 oz/sq yd</p> <p>Thickness 5/16"</p> <p>Recommended Installation Loose lay—Standard Nosing (Glue-On) Glue down—Visit matsinc.com for instructions</p>
---	--

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)
--------------------------	--

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)



CHICAGO COLLECTION™ RB



Mocha



Blue

Charcoal



Dark Gray

Brown

SEATTLE COLLECTION™ RB



Charcoal



Medium Gray



Blue

Dark Gray

Brown

Mocha



Light Gray

Ivy

Burgundy

Natural



SUPREME NOP

Most durable and effective matting in the industry

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Combines three unique fibers to create one of the most effective walk-off mats in the industry
 Large nop design provides outstanding scrubbing action
 Green Label Plus™ Certified
 Common Uses—high traffic entrances, vestibules, lobbies, sports facilities

SPECIFICATIONS


Material 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content Backing OxForce™ high density rubber Roll Sizes 6' 7" x 101'8" 13' 2" x 101'8" Custom Sizes 6' 7" x custom lengths up to 101'8" 13' 2" x custom lengths up to 101'8"	Weight 73 oz/sq yd Thickness 7/16" Recommended Installation Loose lay—Ultra Flex Sew-On Nosing Glue down—Mats Inc. Multi-Bond Adhesive
--	---

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)
--------------------------	--

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 MR Environmental Product Declarations (1 point)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)

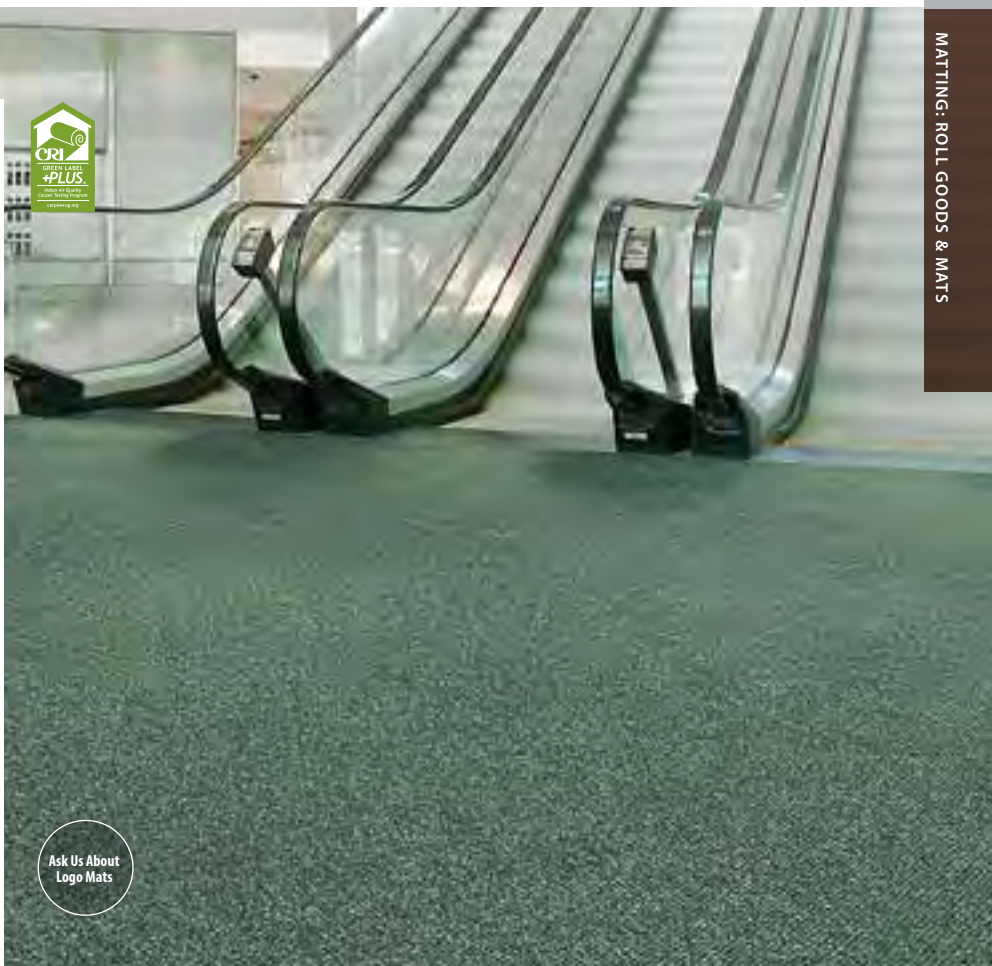


Ask Us About Logo Mats




Charcoal




Dark Gray




Black Walnut




Tweed Brown




Sable Brown



Natural




Spruce



Midnight Blue



Sapphire




Autumn Red



OxForce™ high density rubber backing is long lasting and holds mats securely in place.

BERBER

FEATURES	ZONES	1	2	3	4
<p>Outstanding walk-off performance for multi-directional traffic applications</p> <p>Easily maintained by vacuuming and periodic extraction</p> <p>Stain-resistant, color fast, and permanently anti-static</p> <p>Green Label Plus™ Certified</p> <p>Common Uses—entryways, vestibules</p>					
SPECIFICATIONS 					
<p>Material 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content</p> <p>Backing OxForce™ high density rubber</p> <p>Roll Sizes 6' 7" x 82' 13' 2" x 68' 8" Charcoal, Walnut and Steel Blue also available in tiles, see page 21</p>	<p>Custom Sizes 6' 7" x custom lengths up to 82' 13' 2" x custom lengths up to 68' 8"</p> <p>Thickness 3/8"</p> <p>Weight 64 oz/sq yd</p> <p>Recommended Installation Loose lay—Standard Nosing (Sew-On) Glue down—Mats Inc. Multi-Bond Adhesive</p>				
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)				
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) MR Environmental Product Declarations (1 point) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					



Charcoal




Sterling




Walnut



Rosewood




Steel Blue



Burgundy



Light Beige



Spruce



Verona Gold




Red

Ask Us About Logo Mats




BERKSHIRE

FEATURES	ZONES	1	2	3	4
<p>A synthetic alternative to Cocoa Mat, without the shedding</p> <p>Plush texture is comfortable under foot</p> <p>Highly effective at scraping dirt and removing moisture</p> <p>Green Label Plus™ Certified</p> <p>Common Uses—high traffic entrances, vestibules, lobbies, retail stores, supermarkets, locker rooms, pools, golf courses, sports facilities</p>					
SPECIFICATIONS 					
<p>Material 100% solution-dyed UV stabilized polypropylene fibers with 10% post-consumer recycled content in natural and 5% post-consumer in all other colors</p> <p>Backing OxForce™ high density rubber</p> <p>Roll Sizes 13' 2" x 101' 8"</p> <p>Custom Sizes 6' 7" x custom lengths up to 101' 8" 13' 2" x custom lengths up to 101' 8"</p>	<p>Thickness 1/2"</p> <p>Weight 81.4 oz/sq yd</p> <p>Pattern Ribs run length of the roll</p> <p>Recommended Installation Loose lay—Ultra Flex Sew-On Nosing or shaved beveled edges with rounded corners Glue down—Mats Inc. Multi-Bond Adhesive</p>				
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)				
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) MR Environmental Product Declarations (1 point) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					




Charcoal



Sterling




Black Walnut




Sable Brown



Zinc



Autumn




Steel Blue




Natural



DECORIB

FEATURES	ZONES	1	2	3	4
Deep rib design scrapes soil from all types of footwear Needle punch construction resists crushing Outstanding performance and value Green Label Plus™ Certified Charcoal also available in tiles Common Uses—entryways and vestibules					
SPECIFICATIONS 					
Material 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content Backing High density rubber Roll Sizes 6' 7" x 82' 13' 2" x 68' 8" Custom Sizes 6' 7" x custom lengths up to 82' 13' 2" x custom lengths up to 68' 8" Charcoal also available in tiles, please contact customer service Thickness 3/8" Weight 64 oz/sq yd Pattern Ribs run length of the roll Recommended Installation Loose lay—Standard Nosing (Sew-On) Glue down—Mats Inc. Multi-Bond Adhesive					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) MR Environmental Product Declarations (1 point) IEQ Enhanced Indoor Air Quality Strategies (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					

COCOA MAT

FEATURES	ZONES	1	2	3	4
Authentic, natural and rapidly renewable coco fibers provide a classic look in any entryway Coarse coco fibers brush away dirt and moisture Heavy weight coco material with more compact fibers reduces shedding and crushing Common Uses—entryways, vestibules, foyers with multi-directional traffic flow					
SPECIFICATIONS 					
Material Natural coco fibers—50% of Cocoa Mat is made from natural material Style Cut Pile Backing Vinyl Roll Size 6' 7" x 39' 4" Custom Sizes 6' 7" width x lengths to 39' 4" Thickness All Colors = 17 mm (5/8") Natural also available in 20 mm (3/4") and 23 mm (1") Weight 17 mm (5/8") = 1.36 lbs/sq ft 20 mm (3/4") = 1.43 lbs/sq ft 23 mm (1") = 1.52 lbs/sq ft					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 6 (1 point)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					

3M™ NOMAD™ EXTREME TRAFFIC WALL-TO-WALL CARPET MATTING 9800

Exceptional dirt and water removal for large indoor entrances and wall-to-wall applications


FEATURES	ZONES	1	2	3	4
Designed for EXTREME traffic conditions Up to and greater than 1,000,000 people/year Dual-fiber, random pattern provides exceptional dirt and water removal and allows sand, salt and dirt to blend in until it can be removed Solution-dyed fibers resist fading and staining Multicoated, fiberglass-reinforced vinyl backing provides a water barrier for the floor, helping to prevent mold, mildew, fungus and water damage Low profile allows foot, cart and wheelchair traffic to move easily over the mat 3M Authorized Master Distributor Entrance and Work Area Matting					
SPECIFICATIONS					
Roll Sizes 6' x 50' Edging Not recommended					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					




Charcoal



Gray



Charcoal



Dark Gray




Black



Chocolate




Light Beige



Brown





Natural



Light Gray



ROLL WIDTH	6' 7" or 13' 2"		ROLL LENGTH
			
		68' 8" or 82'	

ENTRANCE SYSTEMS & MATTING

LOGO MATS



PRECISION INLAY™ LOGO

PRECISION INLAY™ WITH LUXTRIA™

Luxurious matting ideal for oversized logo mats or wall-to-wall applications

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Precise reproduction of a logo or image in a superior quality plush mat
 Create with any image, shape or size
 Luxurious matting absorbs moisture and removes dirt
 Pair Luxtria™ colors with the Chicago Collection™ or Seattle Collection™ for base colors to achieve stylish mats for entrances and other interior spaces
 Common Uses—retail stores, malls, commercial settings, hotels, hospitals

SPECIFICATIONS

Material
Premium BCF Nylon 6

Backing
Fleece

Total Thickness
7/16"

Weight
93.8 oz/sq yd

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 5 (1 point)
MR Credit 5 (1-2 points)	
MR Credit 6 (1 points)	

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)



Chicago Collection™




Blue Brown Charcoal Dark Gray Mocha

Seattle Collection™



Blue Brown Burgundy Charcoal Dark Gray Ivy
 Light Gray Medium Gray Mocha Natural

Luxtria™ Logo Colors

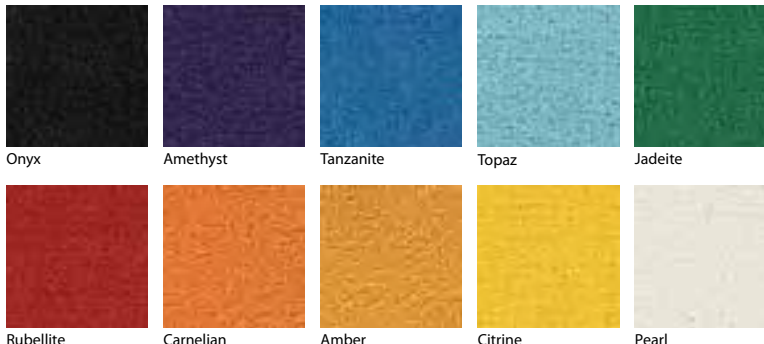

Onyx Amethyst Tanzanite Topaz Jadeite
 Rubellite Carnelian Amber Citrine Pearl



PRECISION INLAY™ WITH SUPER NOP® 52



High performance matting from small logo mats to wall-to-wall applications

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Computer technology scans your logo or image, then cuts exact inlays to reproduce crisp, bold and colorful designs
 Withstands high foot traffic
 Inlay process accurately reproduces fonts and images
 Common Uses—retail stores, malls, commercial settings, hotels, hospitals

SPECIFICATIONS ♻️

Material
 100% Asota® solution-dyed UV stabilized polypropylene fibers with 20% post-consumer content
Thickness
 1/2"
Weight
 93 oz/sq yd

POSSIBLE LEED V 2009 CREDITS


MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point) IEQ Credit 5 (1 point)
--------------------------	--

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 MR Environmental Product Declarations (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)



SUPER NOP® 52

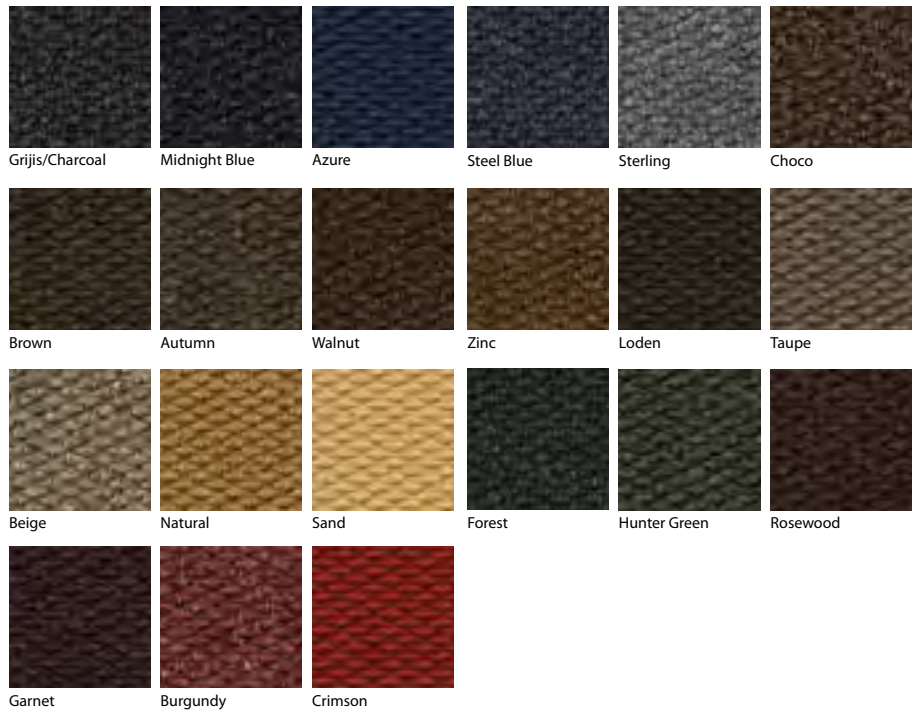


SUPER NOP® 52 LOGO



DESIGN PRINT™

Economical mat ideal for large quantities					
FEATURES	ZONES	1	2	3	4
Jet Print technology injects dyes deeply and permanently into the pile to produce colorful logos Virtually unlimited color combinations Jet Print process promotes a high level of detail Common Uses—high traffic entrances, retail areas, lobbies, reception areas, service counters					
SPECIFICATIONS					
Material 100% heat set nylon					
Style Jet Print					
Backing Slip-resistant nitrile rubber					
Standard Sizes 2' x 3', 3' x 4', 3' x 5', 3' x 10', 4' x 6', 4' x 8', 5' x 6', 5' x 8'					
Thickness 3/8"					
Custom Sizes/Artwork Requirements Contact our Logo Matting Department at 1-800-628-7462					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

3M™ NOMAD™ PRINTED CARPET MATTING 6600

Dual-fiber carpet mat for indoor applications					
FEATURES	ZONES	1	2	3	4
Designed for MEDIUM traffic conditions Allows you to print your custom logo, message, product photo or virtually any custom graphic on a high-performance carpet mat Dual nylon fibers provide exceptional dirt and water removal Flexion vinyl backing will not stain floor and prevents dirt and moisture from falling through the mat onto the floor					
 Authorized Master Distributor Entrance and Work Area Matting					
SPECIFICATIONS					
Material Dual nylon fibers					
Backing Vinyl					
Standard Sizes 3', 4' and 6' widths up to 60'					
Custom Sizes/Artwork Requirements Contact our Logo Matting Department at 1-800-628-7462					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					



Heat Set Nylon



Dual Fiber Nylon

DESIGN PRINT™

Cherry 311	Chianti 100	Cognac 126	Goldenrod 103	Orange Burst 396
Lemon 128	Dandelion 109	Gingerbread 363	Balsam 117	Forest 340
Clover 366	Navy 118	Horizon 398	Caribbean 104	Cerulean 306
Sky 106	Watermelon 335	Magenta 392	Ultraviolet 105	Fog 116
Graphite 388	Latte 123	Black 108	Bark 111	Chestnut 383
		<i>More colors available on our website.</i>		
French Vanilla 394	White 140			

3M™ NOMAD™ PRINTED CARPET MATTING 6600

Cherry 311	Chianti 100	Cognac 126	Goldenrod 103	Orange Burst 396
Lemon 128	Dandelion 109	Gingerbread 363	Balsam 117	Forest 340
Clover 366	Navy 118	Horizon 398	Caribbean 104	Cerulean 306
Sky 106	Watermelon 335	Magenta 392	Ultraviolet 105	Fog 116
Graphite 388	Latte 123	Black 108	Bark 111	Chestnut 383
French Vanilla 394	White 140			

3M™ NOMAD™ EMBOSSED SCRAPER MATTING

Economical personalized matting for medium traffic areas

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Designed for MEDIUM traffic conditions
Up to 400,000 people per year
An economical personalization method to get your name, logo or message in front of customers
Desired image is produced by melting the matting surface under heat and pressure—the resulting image is the same color as the mat
Available in vinyl loop and z-web scraper mats, backed and unbacked
Solid vinyl backing helps protect floors from removed soil and will not stain flooring

3M
Authorized Master Distributor
Entrance and Work Area Matting

SPECIFICATIONS

Embossing Graphics Colors
Image is same color as mat

Embossing Graphics Area
Maximum overall impressions size is 22" x 27"; maximum impression area (not overall dimension) is 120 square inches

Embossing Logo Positions
Portrait or landscape positions are standard. Custom positions and designs are available if detailed artwork is provided.

Standard Edging
Heat embossed on all sides of 3' x 5' and 4' x 6' mats

Roll Sizes
3' and 4' x 60'
Logo colors 4' x 60'

Standard Mat Sizes
3' x 5', 4' x 6', 3' x 20', 4' x 20'

Custom Sizes
3' and 4' widths x custom lengths up to 60'

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

POSSIBLE LEED V 4 CREDITS


IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)



3M™ NOMAD™ MEDIUM TRAFFIC SCRAPER MATTING 6050



3M™ NOMAD™ Z-WEB MEDIUM TRAFFIC SCRAPER MATTING 6250

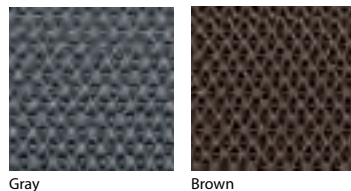

6050 and 8150 also available with logo inlay.
Contact our Logo Matting Department for details.

ENTRANCE SYSTEMS & MATTING

MATTING: WALK-OFF MATS & RUNNERS



3M™ NOMAD™ CARPET MATTING 8850

3M™ NOMAD™ CARPET MATTING JOURNEY 7000™

Bold regency stripe design for stylish interiors

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Dual-fiber construction scrapes off dirt and absorbs moisture
 Class 1 fire rating
 Standard Edging - 4-sided factory edge on all standard sizes
 Common Uses—indoor settings, entrances, foyers, vestibules, lobbies

3M
 Authorized Master Distributor
 Entrance and Work Area Matting

SPECIFICATIONS

Material
 Nylon 6 textured tufted loop with 14% pre-consumer and 5% post-consumer recycled content

Backing
 Flexion Vinyl

Standard Mat Sizes
 3' x 5', 3' x 10', 4' x 6', 4' x 10', 4' x 20', 6' x 6', 6' x 10'

Roll Size
 3" x 60', 4" x 60', 6" x 60'

Semi-Custom Sizes
 3', 4' and 6' widths by custom lengths up to 60'

Custom Sizes
 Any width x any length

Weight
 88 oz/sq yd

Thickness
 1/4"

POSSIBLE LEED V 2009 CREDITS


MR Credit 4 (1-2 points)	IEQ Credit 5 (1 point)
MR Credit 5 (1-2 points)	

POSSIBLE LEED V 4 CREDITS


MR Sourcing of Raw Materials (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)



Acadia Blue



Denali Gray



Galapagos Green




Sahara Brown



CHICAGO COLLECTION™ VB & SEATTLE COLLECTION™ VB

Deeply saturated colors and the luxurious appearance of carpet					
FEATURES	ZONES	1	2	3	4
Nylon fibers remove debris and moisture from footwear SureTac™ vinyl backing will not crack Common Uses—indoor settings, entrances, foyers, vestibules, lobbies					
SPECIFICATIONS ♻️					
Material 100% premium polyamide nylon fibers (6.6) with 10% post-consumer recycled content		Weight 105 oz/sq yd			
Backing Premium SureTac™ Vinyl		Thickness 3/8"			
Roll Size 6' 7" x 82' 4' 2" x 82" (*Seattle Collection™ only)		Recommended Installation Loose lay—Standard Nosing (Glue-On) Glue down—Mats Inc. Ultrabond G21 Adhesive			
Custom Sizes 6' 7" width x lengths to 82' 4' 2" width x lengths to 82' Roll width includes 1" vinyl edge on each roll side. May be trimmed off for glue down applications. Specify if nosing is required on ends.					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					

CHICAGO COLLECTION™ VB

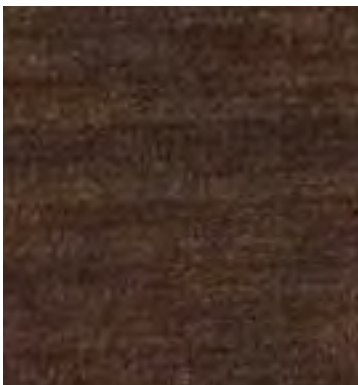

Mocha



Blue



Charcoal



Dark Gray



Brown

SEATTLE COLLECTION™ VB



Charcoal



Dark Gray



Brown




Mocha



Blue



Factory Edging

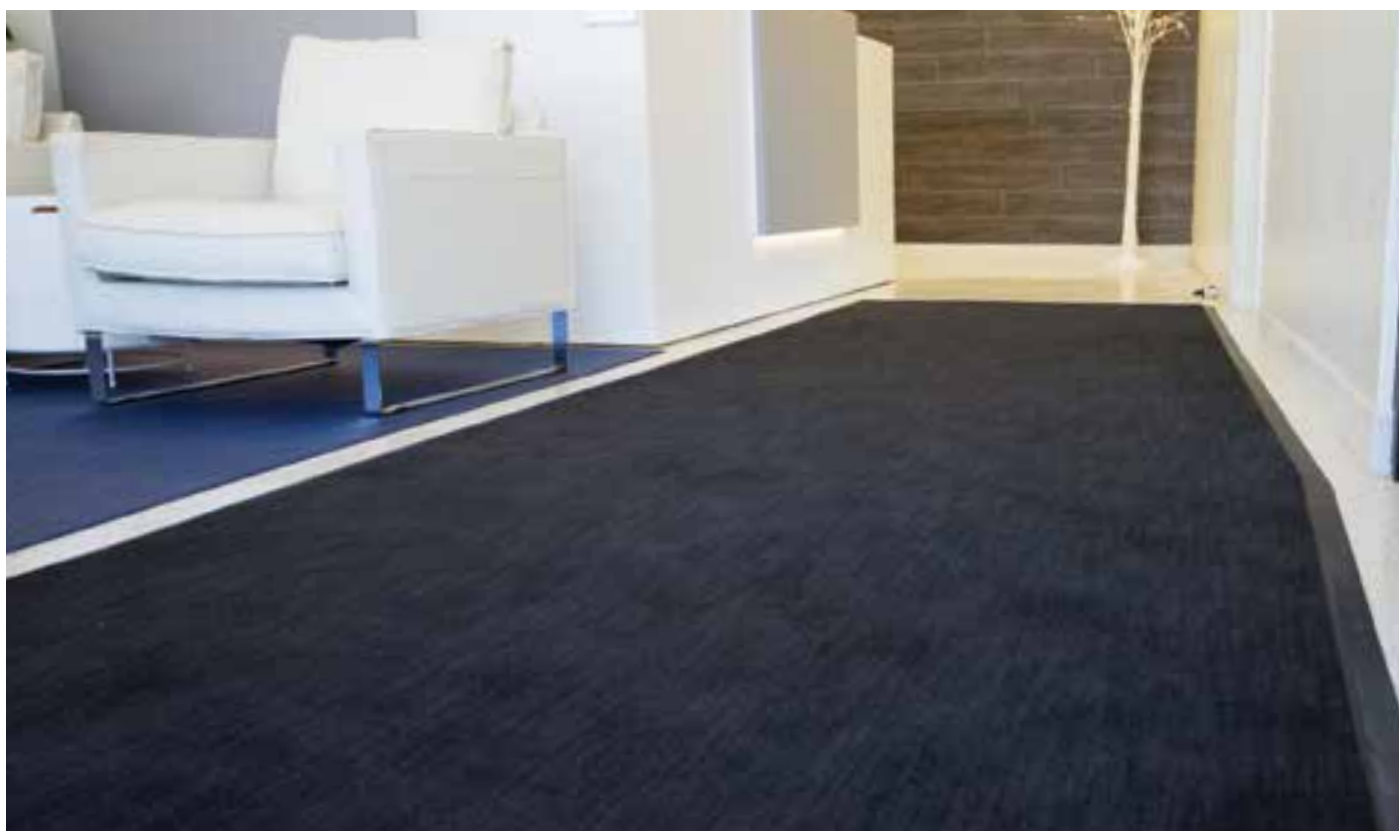

NEW YORK COLLECTION

Most aggressive matting with lavish carpet-like appearance

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Coarse, bristle-like fibers effectively brush shoes clean and capture dirt in the mat
 SureTac™ vinyl backing will not crack
 Rich, vibrant color selection
 Common Uses—indoor settings, entrances, foyers, vestibules, lobbies

SPECIFICATIONS ♻️

<p>Material 100% premium polyamide nylon fibers (6.6) with 10% post-consumer recycled content</p> <p>Backing Premium SureTac™ Vinyl</p> <p>Roll Size 6' 7" x 82'</p> <p>Custom Sizes 6' 7" width x lengths to 82' Roll width includes 1" vinyl edge on each roll side May be trimmed off for glue down applications Specify if nosing is required on ends</p>	<p>Weight 99 oz/sq yd</p> <p>Thickness 3/8"</p> <p>Recommended Installation Loose lay—Standard Nosing (Glue-On) Glue down—Mats Inc. Ultrabond G21 Adhesive</p>
---	---

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point) IEQ Credit 5 (1 point)
--------------------------	--

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)



Invisible scraping fibers



Charcoal Splash



Charcoal



Dark Gray



Light Gray



Brown Sugar



Brown



Cocoa Butter




Cocoa



Blue



Red



Factory Edging



3M™ NOMAD™ HEAVY TRAFFIC CARPET MATTING 8850

Polypropylene and nylon fibers combine to provide superior scraping and drying in heavy traffic applications

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Designed for HEAVY traffic conditions
Up to 1,000,000 people/year
Dual-fiber and random pattern hide salt, dirt and debris until it can be removed
Solution-dyed fibers resist fading and staining and keep the mat looking good longer
Flexion vinyl backing will not stain floor and prevents dirt and moisture from reaching the floor
Low profile allows foot, cart and wheelchair traffic to move easily over the mat
Standard Edging - 4-sided factory edge on all standard sizes

3M
Authorized Master Distributor
Entrance and Work Area Matting

SPECIFICATIONS

Standard Mat Sizes

3' x 5'; 3' x 10'; 4' x 6'; 4' x 10'; 6' x 10'

Roll Sizes

3'; 4'; 6' x 60'

Semi-Custom Sizes

3', 4' and 6' widths x custom lengths up to 60'

Custom Sizes

Any width x any length

Thickness

5/16"

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

IEQ Credit 5 (1 point)

POSSIBLE LEED V 4 CREDITS

IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)




Black



Sterling



Dark Brown



Navy



3M™ NOMAD™ CARPET MATTING 6500

Dual-fiber matting with Flexion backing prevents dirt and moisture from reaching the floor underneath

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Designed for MEDIUM traffic conditions
Up to 400,000 people/year
Dual-fiber, checkerboard pattern scrapes off dirt and removes water
Flexion vinyl backing won't stain the floor and helps prevent dirt and moisture from penetrating through the mat to the floor
Standard Edging - 4-sided factory edge on all standard sizes

3M
Authorized Master Distributor
Entrance and Work Area Matting

SPECIFICATIONS

Standard Mat Sizes

3' x 5'; 4' x 6'

Roll Sizes

3'; 4'; 6' x 60'

Semi-Custom Sizes

3', 4' and 6' widths x custom lengths up to 60'

Custom Sizes

Any width x any length

Thickness

5/16"

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

IEQ Credit 5 (1 point)

POSSIBLE LEED V 4 CREDITS


IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)



Black



Gray



Brown



3M™ NOMAD™ CARPET MATTING 5000

Dual-fiber matting with Flexion backing prevents dirt and moisture from reaching the floor underneath

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Designed for LIGHT traffic conditions
Up to 50,000 people/year

Cross-rib, dual-fiber design scrapes off dirt and removes water

Flexion vinyl backing won't stain the floor and helps prevent dirt and moisture from reaching the floor underneath

Heather weave blended designer colors complement almost any décor

Standard Edging - 4-sided factory edge on all standard sizes

3M

Authorized Master Distributor
Entrance and Work Area Matting

SPECIFICATIONS

Standard Mat Sizes

3' x 5', 3' x 10', 4' x 6', 4' x 10', 6' x 10'

Roll Sizes

3', 4', 6' x 60'

Semi-Custom Sizes

3', 4' and 6' widths x custom lengths up to 60'

Custom Sizes

Any width x any length

Thickness

5/16"

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

IEQ Credit 5 (1 point)

POSSIBLE LEED V 4 CREDITS

IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)



Black



Black-Gray



Gray



Brown



Blue



Red

3M™ NOMAD™ CARPET MATTING 4000

Dual-fiber matting with Flexion backing prevents dirt and moisture from reaching the floor underneath

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Designed for LIGHT traffic conditions
Up to 50,000 people/year

The dual-fiber construction eliminates and hides dirt and moisture

Flexion vinyl backing won't stain the floor and helps prevent dirt and moisture from reaching the floor underneath

Standard Edging - 4-sided factory edge on all standard sizes

3M

Authorized Master Distributor
Entrance and Work Area Matting

SPECIFICATIONS

Standard Mat Sizes

3' x 5', 3' x 10', 4' x 6', 4' x 10', 6' x 10'

Roll Sizes

3', 4', 6' x 60'

Semi-Custom Sizes

3', 4' and 6' widths x custom lengths up to 60'

Custom Sizes

Any width x any length

Thickness

5/16"

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

IEQ Credit 5 (1 point)

POSSIBLE LEED V 4 CREDITS


IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)



Black



Gray




Brown

BERBER VINYLBACK


Best runner matting available					
FEATURES	ZONES	1	2	3	4
Super-durable fibers provide outstanding walk-off performance Hobnail design provides aggressive soil removal Heavy-duty SureTac™ vinyl back won't crack and ensures flat, durable edges Not recommended on carpet Common Uses—loose lay in high, multi-directional traffic entrances, vestibules, lobbies, hallways, elevators					
SPECIFICATIONS ♻️					
Material 100% solution-dyed UV stabilized polypropylene fibers with 15% post-consumer recycled content					
Backing Premium SureTac™ Vinyl					
Mat Sizes 3' x 5', 4' x 6'					
Roll Sizes 3' x 60' (Charcoal and Walnut) 4' x 60', 6' x 60'					
Custom Sizes 3', 4' and 6' widths x lengths to 60' Roll width includes 1" vinyl edge on each roll side Specify if nosing required on ends					
Size Tolerance +/- 2% on length and width					
Thickness 3/8"					
Face Weight 37 oz/sq yd					
Recommended Installation Apply nosing to end of mats					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					



Charcoal



Sterling



Walnut



Rosewood





PIN STEP

FEATURES	ZONES	1	2	3	4
Hobnail design provides effective soil removal Low profile allows easy door clearance An economical matting solution Common Uses—loose lay in medium, multi-directional traffic entrances, vestibules, lobbies, hallways					
SPECIFICATIONS ♻️					
Material 100% solution-dyed UV stabilized polypropylene fibers					
Backing Premium non-staining vinyl					
Mat Sizes 2' x 3', 3' x 4', 3' x 5', 3' x 6', 3' x 10', 4' x 6', 4' x 8', 4' x 10'					
Roll Sizes 3' x 60', 4' x 60', 6' x 60'					
Custom Sizes 3', 4' and 6' widths x lengths to 60'					
Size Tolerance +/- 2% on length and width					
Thickness 3/8"					
Face Weight 24 oz/sq yd					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					




DIAMOND BLOCK

FEATURES	ZONES	1	2	3	4
Rigid construction traps dirt and moisture below the surface Molded rubber edges keep moisture contained Special gripper backing minimizes movement on most carpets and hard surfaces Common Uses—heavy, multi-directional traffic entrances, vestibules, lobbies, hallways					
SPECIFICATIONS ♻️					
Material 100% solution-dyed polypropylene fibers with 15% post-consumer recycled content					
Backing SBR cleated rubber—also available with launderable nitrile rubber backing for grease and chemical resistance					
Mat Sizes 2' x 3', 3' x 4', 3' x 5', 3' x 8' 5", 3' x 10', 3' x 12' 3", 3' x 16', 3' x 20' 4' x 6', 4' x 8' 5", 4' x 10', 4' x 12' 3", 4' x 16', 4' x 20' 6' x 8' 5", 6' x 12' 3", 6' x 16', 6' x 20'					
Size Tolerance +/- 2% on length and width					
Thickness 3/8"					
Face Weight 36 oz/sq yd					
Note Standard sizes only, no seaming					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 5 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					

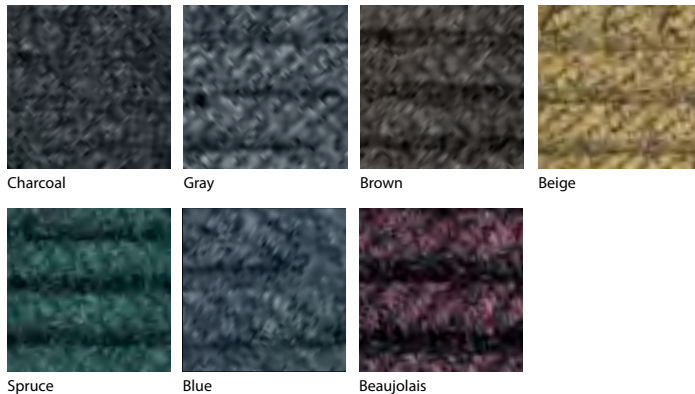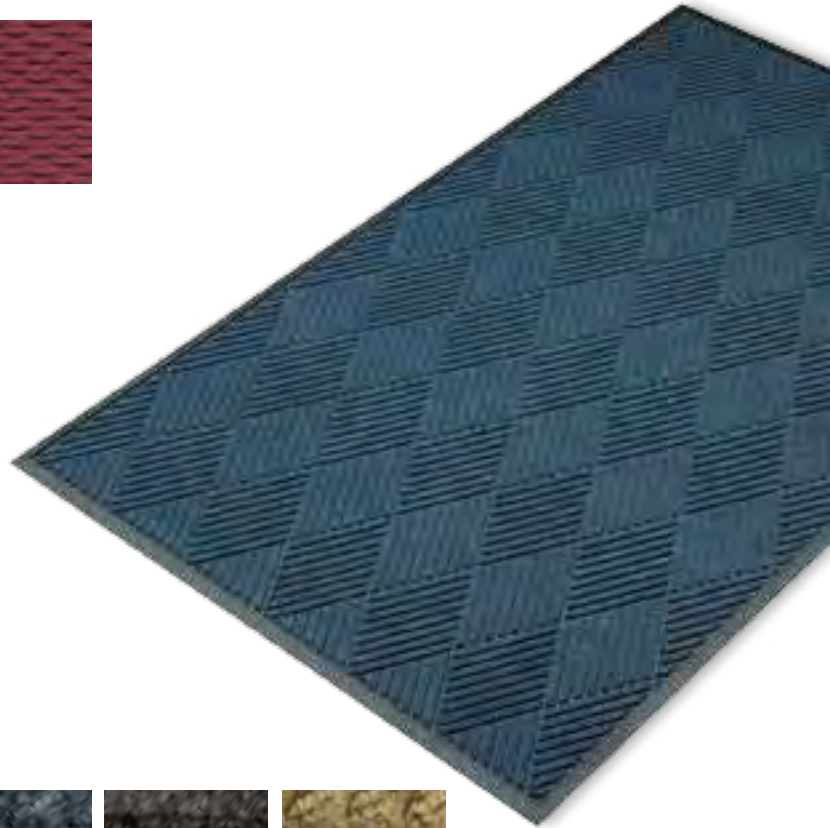

AQUA BLOCK

FEATURES	ZONES	1	2	3	4
<p>Reinforced waffle design provides crush-proof scraping action</p> <p>Holds 1.5 gallons of water per square yard</p> <p>Special gripper backing minimizes movement on most carpets and hard surfaces</p> <p>Common Uses—loose lay in outdoor or indoor settings, entrances, vestibules, lobbies, workstations, hallways</p>					
SPECIFICATIONS ♻️					
<p>Material 100% solution-dyed polypropylene fibers</p> <p>Backing Nitrile gripper</p> <p>Mat Sizes 2' x 3', 3' x 4', 3' x 5', 3' x 10', 3' x 12', 3' x 16', 3' x 20' 4' x 6', 4' x 8', 4' x 10', 4' x 12', 4' x 14', 4' x 16', 4' x 20' 6' x 8', 6' x 12', 6' x 16', 6' x 20'</p> <p>Thickness 1/4"</p> <p>Face Weight 24 oz/sq yd</p>					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					




Charcoal



Gray



Dark Brown




Evergreen



Blue



Burgundy



Red/Black



OLEFIN

FEATURES	ZONES	1	2	3	4
<p>Quality olefin yarns are expertly tufted</p> <p>Absorbs over one gallon of water per square yard</p> <p>Dries much faster than nylon fibered mats</p> <p>Common Uses—loose lay in medium traffic entrances, vestibules, lobbies, hallways</p>					
SPECIFICATIONS ♻️					
<p>Material 100% continuous filament solution-dyed olefin tufted yarn</p> <p>Backing Non-staining vinyl</p> <p>Mat Sizes 2' x 3', 3' x 4', 3' x 5', 3' x 6', 3' x 10', 4' x 6', 4' x 8', 4' x 10'</p> <p>Roll Sizes 3' x 60', 4' x 60', 6' x 60'</p> <p>Custom Sizes 3', 4' and 6' widths x lengths to 60'</p> <p>Size Tolerance +/-2% on length and width</p> <p>Thickness 3/8"</p> <p>Face Weight 18 oz/sq yd</p>					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					



Charcoal



Brown/Silver



Dark Brown



Forest Green



Blue



Red



TOUGH RIB



FEATURES	ZONES	1	2	3	4
Traditional, high performance indoor/outdoor ribbed mat Bi-level rib design offers aggressive walk-off performance Ideal for tough indoor applications Common Uses—loose lay in medium traffic entrances, vestibules, lobbies, hallways					
SPECIFICATIONS ♻️					
Material 100% solution-dyed UV stabilized polypropylene fibers					
Backing Premium non-staining vinyl					
Mat Sizes 2' x 3', 3' x 4', 3' x 5', 3' x 6', 3' x 10', 4' x 6', 4' x 8', 4' x 10'					
Roll Sizes 3' x 60', 4' x 60', 6' x 60'					
Custom Sizes 3', 4' and 6' widths x lengths to 60'					
Size Tolerance +/-2% on length and width					
Thickness 3/8"					
Face Weight 24 oz/sq yd					
Pattern Rib run length of roll					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					



Charcoal



Gray




Chocolate



Forest Green



Blue





Red

BRISTLE MAT™

SURFACE SYSTEM

Superior outdoor mat for high traffic entrances					
FEATURES	ZONES	1	2	3	4
Extremely durable, hard-wearing nylon bristles clean footwear with each step Resistant to all weather and extreme conditions Drop-through construction hides collected dirt from view Rolls up for easy handling and maintenance Common Uses—loose lay at low, medium or high traffic entrances					
SPECIFICATIONS ♻️					
Material Anodized aluminum and vinyl with nylon (6.6) brush inserts; 65.63% pre-consumer recycled content					
Mat Sizes 18" x 31", 24" x 36"					
Thickness 7/8"					
Weight 18" x 31" = 13 lbs 24" x 36" = 19.4 lbs (or 3.0 lbs/sq ft)					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 point)		IEQ Credit 5 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)					

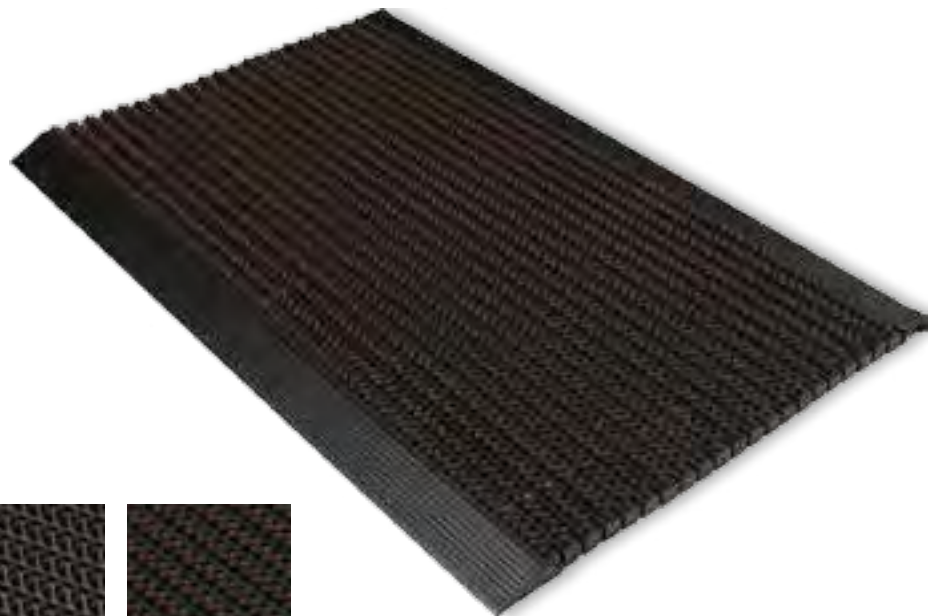


Black



Brown



Gray Blend



Red Blend

ENTRANCE SYSTEMS & MATTING

MATTING: COMFORT & WET AREA




DUCKTILE

BERBER EZE





Heel-proof and stain-resistant comfort					
FEATURES	ZONES	1	2	3	4
All the benefits of Berber plus a top-grade sponge backing for outstanding comfort Heel-proof properties for the most demanding applications Stain-resistant, color-fast, and permanently anti-static Common Uses—offices, banks, check-out stations, service counters, pharmacies					
SPECIFICATIONS ♻️					
Material 100% solution-dyed UV stabilized polypropylene fibers with 3.86% post-consumer recycled content, bonded to resilient sponge		Custom Sizes 3', 4', 6', 7', 13' 2" x 50' - minimums may apply			
Backing Resilient sponge		Thickness 5/8"			
Edges Standard Nosing (Sew-On) or rounded corners with tapered edges (best in dry settings)		Options Rounded corners, beveled edges, consult a Product Specialist about other "Eze" rubber sponge backed products Colors available in tiles			
Roll Widths 3', 4', 6', 7', 13' 2"		Recycled Content Berber Eze: 3.86% post-consumer Berber Eze Tile: 2.07% pre-consumer, 4.65% post-consumer			
Tile Size 17" x 17" 12 tiles (4 sq ft) per case					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

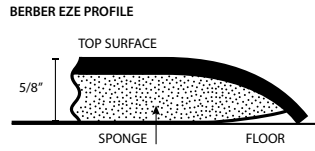

CUSHION EZE

FEATURES	ZONES	1	2	3	4
Durable, marbled top surface bonded to fatigue-fighting sponge Beveled edges on all four sides create a safe transition on and off the mat Greater wearability than single layer foam mats Not heel proof Common Uses—work stations, cash registers, service counters, salons, industrial settings					
SPECIFICATIONS ♻️					
Material Marbled high-grade top surface bonded to resilient sponge		Mat Sizes 18" x 30", 18" x 48", 2' x 3', 3' x 4', 3' x 5', 36" x 64"			
Style Smooth surface		Roll Sizes 2' x 60', 3' x 60', 4' x 60'			
Backing Resilient sponge		Custom Sizes 2', 3' and 4' widths x lengths to 60'			
Edges Beveled with rounded corners or square edge		Thickness 1/2"			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

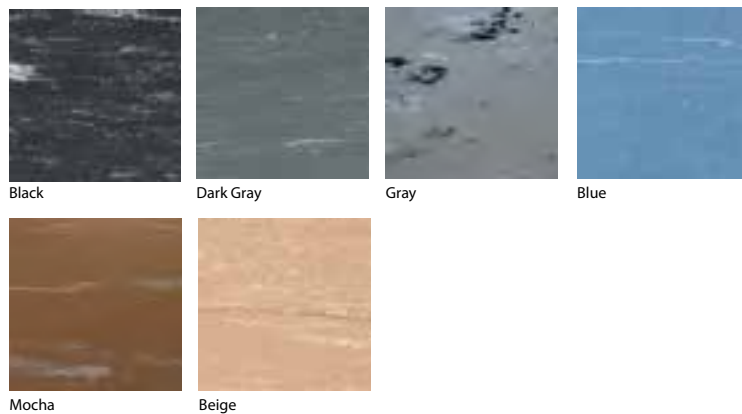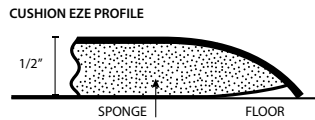

3M™ SAFETY-WALK™ CUSHION MATTING 3270

Ideal for light industrial and light to medium commercial applications where people stand for extended periods of time

FEATURES	ZONES	1	2	3	4
<p>Spring-coiled vinyl compresses uniformly and continually, helping provide greater comfort and less fatigue</p> <p>Textured top surface provides a high coefficient of friction for slip resistance</p> <p>Coils are permanently fixed to the top surface and will not delaminate or separate when wet like foam mats</p> <p>Lightweight for easy moving and positioning</p> <p>Common Uses—light to medium industrial applications, shop and canteen counters, packing lines, warehouses</p> <p>3M Authorized Master Distributor Entrance and Work Area Matting</p>					

SPECIFICATIONS ♻️

Roll Sizes
4' x 65'


Standard Sizes
3270 - 3' x 10'; 3' x 20'
3270E - 3' x 5'; 3' x 10'; 3' x 20'; 4' x 6'; 4' x 10'

Custom Sizes
3270 - 4' width x custom lengths up to 65'


Standard Edging
3270 - none
3270E - heat embossed on all sides

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

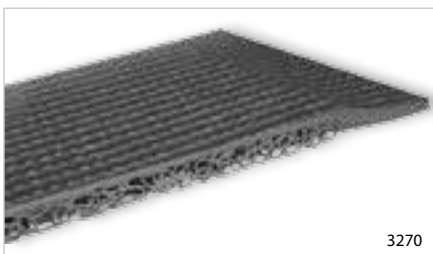

3270

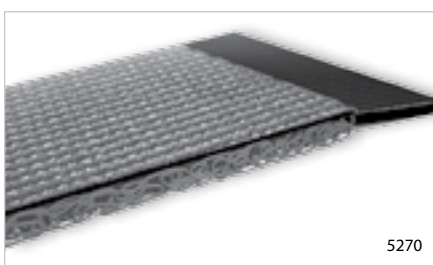

5270

3M™ SAFETY-WALK™ CUSHION MATTING 5270

Designed for light to medium industrial areas where people stand for extended periods of time

FEATURES	ZONES	1	2	3	4
<p>Spring-coiled vinyl compresses uniformly and continually, helping provide greater comfort and less fatigue</p> <p>Textured top surface provides a high coefficient of friction for slip resistance</p> <p>Solid top allows debris to stay on top of the mat for easy cleaning</p> <p>Special grease- and oil-resistant coating keeps mat resilient over time, providing continuous comfort</p> <p>Ideal for the workplace where people stand for extended periods of time</p> <p>Common Uses—light to medium industrial applications, shop and canteen counters, packing lines, warehouses</p> <p>3M Authorized Master Distributor Entrance and Work Area Matting</p>					

SPECIFICATIONS ♻️

Roll Sizes
3'; 4' x 65'

Standard Sizes
5270E - 3' x 2'; 3' x 5'; 3' x 10'; 3' x 20'; 4' x 6'; 4' x 20'

Custom Sizes
5270 - 3' and 4' widths x custom lengths up to 65'

Standard Edging
5270 - none
5270E - heat embossed on all sides

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

3M™ SAFETY-WALK™ CUSHION MATTING 5100

Provides comfort and safety for wet areas in the workplace where people stand for extended periods of time

FEATURES	ZONES	1	2	3	4
<p>Rigid vinyl z-web construction provides firm support and allows cart traffic</p> <p>Extended ridge design provides increased traction in wet areas, helping reduce slips and falls</p> <p>Open z-web design allows liquids and small debris to fall through enhancing the security of footing</p> <p>Ideal for the workplace where people stand for extended periods of time</p> <p>Common Uses—dishwashing stations, deli departments, food prep areas</p> <p>3M Authorized Master Distributor Entrance and Work Area Matting</p>					

SPECIFICATIONS ♻️

Roll Sizes
3' x 50'



Custom Sizes
3' widths x custom lengths up to 50'

Standard Sizes
3' x 5'; 3' x 10'; 3' x 20'

Edging
Not recommended

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

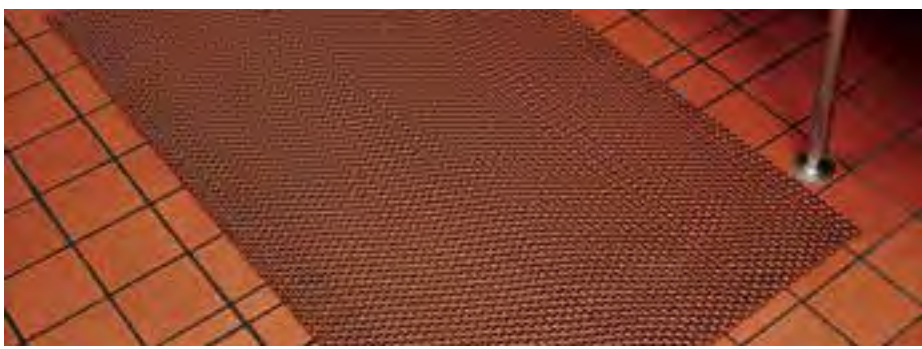

Black



Quarry Tile Red

BUBBLE MAT



The ultimate anti-fatigue mat... dozens of air pockets provide all-day comfort

FEATURES	ZONES	1	2	3	4
The ultimate anti-fatigue mat ... dozens of air pockets provide all-day comfort					
Resilient rubber construction does not compress over time					
Molded safety edges on all sides eliminate potential tripping hazards					
Common Uses—work stations, cash registers, service counters, industrial settings					
SPECIFICATIONS ♻️					
Material Premium black molded rubber with 27% pre-consumer and 27% post-consumer recycled content					
Style Raised bubble pattern					
Backing Hollow "air dome"					
Mat Sizes 2' x 3'; 3' x 4'					
Thickness 1/2"					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					





Black

BUBBLE MAT PROFILE



ERGORUNNER


FEATURES	ZONES	1	2	3	4
Economical, slip-resistant, anti-fatigue matting for areas with water or where slips occur					
Unique tubular design is effective and long lasting					
Open grid drainage					
Chemical and oil-resistant					
Easy to clean with mild household detergent					
Easy to roll up and store					
Common Uses— light industrial applications, shop and canteen counters, packing lines, warehouses					
SPECIFICATIONS ♻️					
Material Slip-resistant, self-draining PVC cushion matting					
Style Open Grid pattern					
Roll Sizes 2' x 33'; 3' x 33'					
Thickness 3/8"					
Weight 0.77 lbs/sq ft					
Recycled Content 20% post-consumer					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

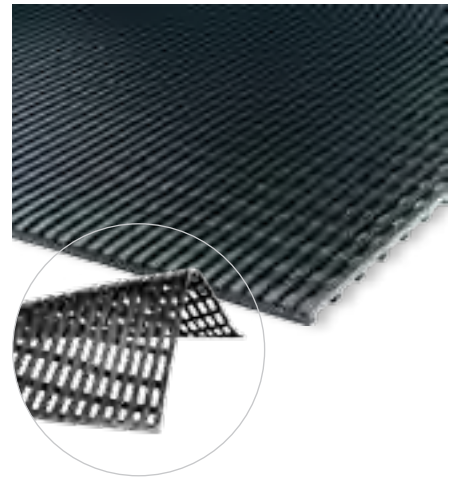

Black

KUSHION SAFE

FEATURES	ZONES	1	2	3	4
High-performance drainage and anti-fatigue safety mat Slip-resistant surface Resists mold and mildew growth Available in grease-proof or grease-resistant compounds Common Uses—commercial kitchens, restaurants, bars, meat rooms, food service, locker rooms, sport facilities					
SPECIFICATIONS ♻️					
Material Molded rubber with 3% pre-consumer and 85% post-consumer recycled content					
Style Honeycomb pattern					
Edges Square edge					
Standard 3' x 5' square edge					
Thickness 3/4"					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

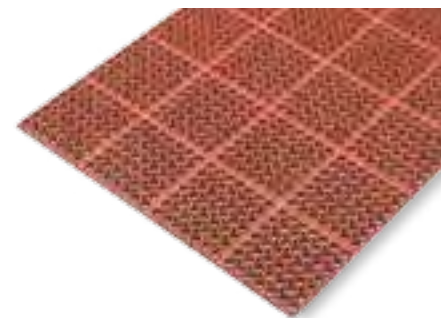



Grease-Resistant Black Grease-Proof Red

KUSHION SAFE PROFILE



KUSHION SAFE LIGHT

FEATURES	ZONES	1	2	3	4
Multipurpose anti-fatigue mat Superior drainage Grease and chemical resistance Molded beveled edges on all sides Common Uses—kitchens, restaurants, bars, meat rooms, food service, industrial work stations and sport facilities					
SPECIFICATIONS ♻️					
Material Molded rubber with recycled content (Black 27% pre-consumer and 27% post-consumer; Red 11% pre-consumer, 11% post-consumer)					
Style Honeycomb pattern					
Black: grease-resistant					
Red: grease-proof					
Edges Beveled edge					
Standard 3' x 5' beveled edge					
Thickness 1/2"					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

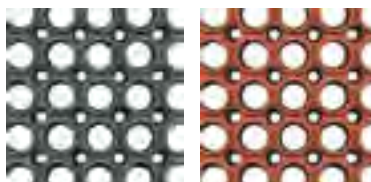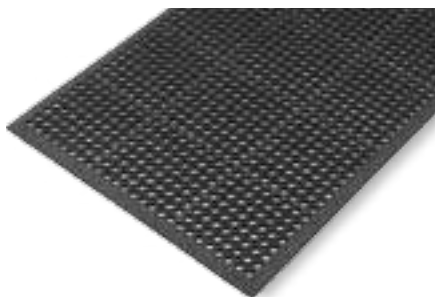



Grease-Resistant Black Grease-Proof Red

KUSHION SAFE LIGHT PROFILE



KUSHION SAFE MODULAR

FEATURES	ZONES	1	2	3	4
Modular design allows custom configuration. Lightweight panels are easily removed for cleaning. Grease and chemical resistance. Multipurpose anti-fatigue mat. Common Uses—commercial kitchens, restaurants, bars, meat rooms, food service, locker rooms, sport facilities					
SPECIFICATIONS ♻️					
Material Molded rubber with recycled content (Black: 27% pre-consumer and 27% post-consumer; Red: 11% pre-consumer and 11% post-consumer)					
Format Mat					
Size 3' x 3' with built in connectors					
Thickness 5/8"					
Weight 27 lbs					
Installation Loose Lay					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

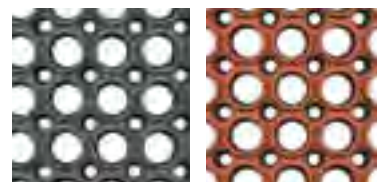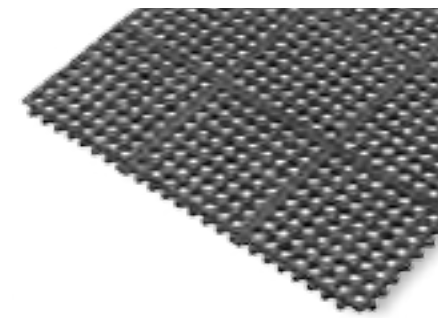

Grease-Resistant Black Grease-Proof Red


KUSHION SAFE MODULAR PROFILE





DUCKTILE™

FEATURES	ZONES	1	2	3	4
Flexible anti-slip drainage tiles provide comfort and safe footing in wet areas					
Anti-bacterial properties prevent mildew					
Easy to install with a simple click design					
Common Uses—pool surroundings, health clubs, locker rooms, shower areas, hot tubs, saunas, scrub sinks, restrooms					
SPECIFICATIONS ♻️					
Material 100% recyclable PE composite					
Style Molded interlocking tile with drop-through construction					
Backing Drop through					
Size approximately 15" x 15"					
Case Pack 55 tiles/case					
Thickness 10.3 mm					
Options 14.8" x 2.2" edge strip, 2.2" x 2.2" corner strip					

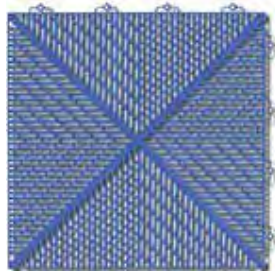

Light Blue



Sand



Shadow Gray

3M™ SAFETY-WALK™ WET AREA MATTING 3200

Remarkable slip resistance in wet areas with heavy traffic

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Z-web design provides uniform foot support
 Durable - won't flatten over time
 Open construction allows water to drain through, helping keep surfaces drier
 Enhances slip resistance, helping reduce falls
 Anti-microbial coating provides resistance to mildew, fungus and odors in the mat
 Common Uses—poolside, locker rooms, hydrotherapy rooms, saunas

3M
 Authorized Master Distributor
 Entrance and Work Area Matting

SPECIFICATIONS ♻️

Roll Sizes
 3' x 50'

Standard Mat Sizes
 3' x 10'; 3' x 20'


Custom Sizes
 3' width x custom lengths up to 50'

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)



Blue



Tan



3M™ SAFETY-WALK™ WET AREA MATTING 1500

Comfort and safety for barefoot traffic

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Cushioned vinyl loops provide comfortable surface for barefoot traffic
 Coiled vinyl loops reduce impact of dropped items that may otherwise shatter and be a danger to barefoot traffic
 Open construction allows water to drain through, helping keep surfaces drier
 Improves slip resistance, helping reduce falls
 Anti-microbial coating provides resistance to mildew, fungus and odors in the mat
 Common Uses—poolside, locker rooms, beneath water fountains

3M
 Authorized Master Distributor
 Entrance and Work Area Matting

SPECIFICATIONS ♻️

Roll Sizes
 3' x 82'

Standard Mat Sizes
 3' x 20'

Custom Sizes
 3' width x custom lengths up to 82'

POSSIBLE LEED V 2009 CREDITS

MR Credit 5 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)



Blue



Green



SPECIALTY SOLUTIONS

OUTDOOR & ROOFTOP PAVERS

OUTDOOR & ROOFTOP PAVERS

Lighter weight and won't crack or break like cement pavers

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Tiles provide superior noise reduction and impact absorption
 Slip, frost and stain-resistant
 Water permeable and light weight texture
 Minimal maintenance required
 Sustainable product manufactured from recycled materials
 No adhesive needed
 Common Uses—rooftops, patios, green roofs, walkways, gardens

SPECIFICATIONS

Material
Recycled rubber

¾" PAVERS INTERLOCKING & NON-INTERLOCKING TILES

Surface Design
Smooth or Brick

Tile Size
 Interlocking = 24" x 24" (61 cm x 61 cm)
 Non-Interlocking = 23-3/4" x 23-3/4" (60 cm x 60 cm)

Thickness
¾" (19 mm)

Weight
 Interlocking = 4.375 lbs/sq ft
 Non-Interlocking = 3.875 lbs/sq ft

Note
 Can be used for rooftop applications.
 Drainage system may be required.

Recycled Content
 100% Black = 90% post-consumer
 Beige, Brown, Green, Red = 87% post-consumer
 75% color = 49% post-consumer and 7% pre-consumer
 50% color = 56% post-consumer and 6% pre-consumer
 25% color = 65% post-consumer and 4% pre-consumer

1¾" AND 2½" INTERLOCKING TILES

Surface Design
Smooth

Size
24" x 24" (61 cm x 61 cm)

Thickness
1-3/4" (44 mm), 2-1/2" (63 mm)

Weight
 1-3/4" = 6 lbs/sq ft
 2-1/2" = 7.25 lbs/sq ft

Recycled Content
 100% Black = 14% post-consumer and 72% pre-consumer
 Beige, Brown, Green, Red = 14% post-consumer and 71% pre-consumer
 75% color = 8% post-consumer and 70% pre-consumer
 50% color = 9% post-consumer and 72% pre-consumer
 25% color = 11% post-consumer and 73% pre-consumer

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point)
MR Credit 5 (1-2 points)	

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 IEQ Enhanced Indoor Air Quality Strategies (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)



BACKING FOR 1¾" AND 2½" PAVERS

Water flow designed backing—Ideal for landscape applications

PIGMENT




Black




Terracotta Red



Teak Brown




Stone Beige




Forest Green

25% Intensity

Also available in 50% and 75% color intensities



Brown




Red



Orange



Beige



Green

SMOOTH AND BRICK TOP DESIGNS

Brick design available in ¾" thickness only





INTERLOCKING TILE SYSTEM




SANIPATH™


FEATURES	ZONES	1	2	3	4
Comfortable for bare feet Provides slip resistance Antimicrobial and antifungal additives are infused during production UV-Resistant Instant 4-way water drainage Easy handling for cleaning and storage Easy to clean with mild household detergent Minimum 30% post-consumer recycled PVC content Common Uses—rooftops, decks, locker rooms, showers/stalls, poolside, jacuzzis, docks, anywhere there is wet flooring					
SPECIFICATIONS ♻️					
Material Open grid PVC matting with slip-resistant surface, antibacterial/antifungal additives, and instant 4-way water drainage Roll Sizes 2' x 33'; 3' x 33' Thickness 3/8" Weight 0.75 lbs/sq ft Recycled Content 30% post-consumer					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					

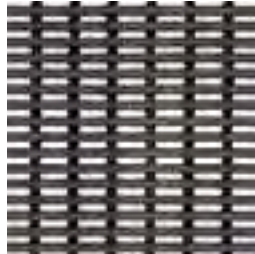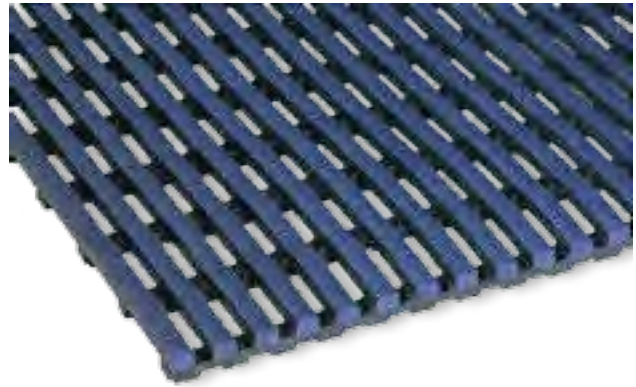

Black

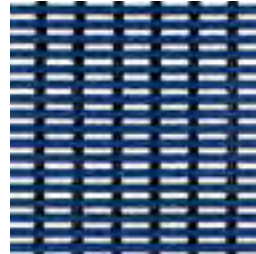


Oxford Blue

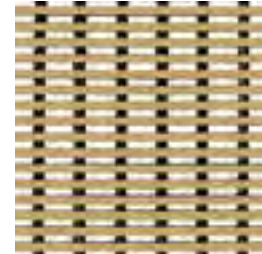


Buff

SKYPATH

Specifically designed to protect flat roof membranes from pedestrian foot traffic					
FEATURES	ZONES	1	2	3	4
Withstands extreme wind (up to 94 mph) and weather conditions Diamond cut design provides slip resistance and sure footing Compatible with vinyl roofing membranes Open grid design encourages fast water drainage Easy to cut to size and install Easy to roll up and store UV-resistant Gray color helps distinguish frosty or dewy surfaces Common Uses—rooftop walkways, access to HVAC and telecommunications equipment on rooftops					
SPECIFICATIONS ♻️					
Material Open grid, self draining, non-porous, PVC roof walkway matting system Roll Sizes 2' x 33'; 3' x 33' Thickness 9/16" Weight 1.35 lbs/sq ft					

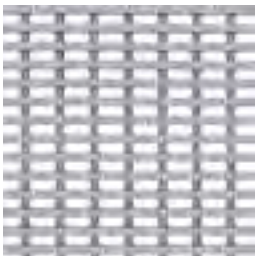

Gray

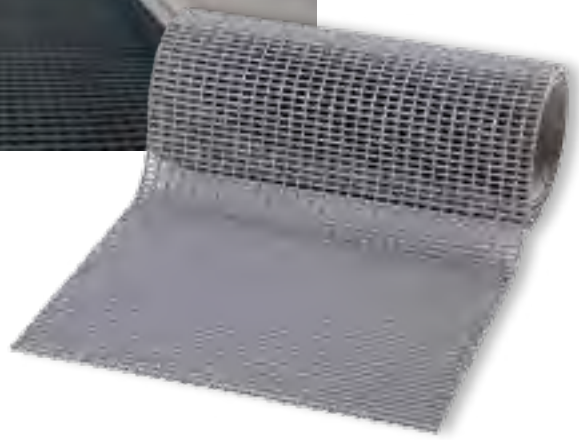

ECO TILE

Modular alternative to expensive epoxy concrete coating					
FEATURES	ZONES	1	2	3	4
<p>Long wearing, industrial tile protects concrete, wood or asphalt from the wear and tear of heavy equipment</p> <p>Excellent wear characteristics and chemical resistance</p> <p>Easy to install, no adhesive required</p> <p>Common Uses—garages, warehouses, production areas, loading docks, showrooms, trade show floors, retail stores, and areas with hydrostatic pressure problems</p>					
SPECIFICATIONS ♻️					
<p>Material Injection molded 100% recyclable PVC, REACH compliant</p> <p>Surface Design Raised Disc or Smooth Texture</p> <p>Tile Size 19-5/8" x 19-5/8"</p> <p>Weight 4.23 lbs/tile</p> <p>Thickness 1/4"</p> <p>Options Eco-edging, beveled edges</p>					



RAISED DISC



Light Gray



Dark Gray



Graphite



Black

SMOOTH TEXTURE



Light Gray



Dark Gray



Graphite



Black



Yellow



Red



Green



Blue

SPORTS FLOORING

MULTIPURPOSE

MULTILINO™

MULTILINO™

Superior multipurpose floor with highest performance for intense sports

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Multipurpose sports floor system withstands high intensity indoor sports including basketball, volleyball and In-line skating

Environmentally-friendly, made from renewable materials; biodegradable

DIN Certified

Common Uses—multipurpose recreation facilities, basketball courts, floor hockey, racquet sports, and volleyball courts

SPECIFICATIONS

Material

Linoleum top layer with MultiLino™ FM or WDK subsystem

Roll Size

6.56' x 91.86'

Custom Sizes

6.56' x lengths up to approximately 91.86'

Top Layer Thickness

3.2 mm

*Wood Grain - 4 mm

Additional Specifications

ASTM E648 Class 1, ASTM F2772 PASS

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)

IEQ Credit 4.3 (1 point)

MR Credit 6 (1 point)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)

IEQ Low-Emitting Materials (up to 3 points)



MULTILINO™ SUBSYSTEMS


MultiLino™ offers a range of sub construction floors to meet the varying needs of sports facilities. MultiLino™ floors are DIN Certified ensuring the highest standards in durability, performance and safety.

	MultiLino™ FM	MultiLino™ WDK
Total Thickness Approximate	9.2 mm *10 mm	33.2 mm *34 mm
Weight Per Square Foot	1.25 lbs *1.43 lbs	3.13 lbs *3.31 lbs
Recycled Content Pre-Consumer	34.65%	15.27%
Rapidly Renewable Content	67.13%	29.1%

MultiLino™ FM

POINT ELASTIC

Top Layer

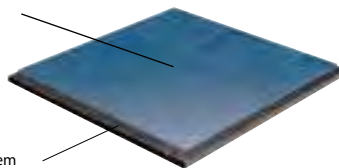


Elastic Subsystem

Construction Height: 10 mm

MultiLino™ WDK

AREA ELASTIC

Top Layer

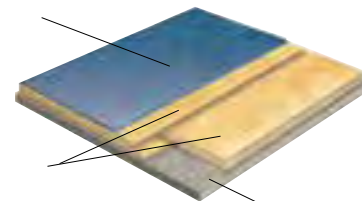

Wood

Construction Height: 33.2 mm

Elastic Subsystem

TOP LAYER COLOR OPTIONS



Volcanic Red



Canyon



Glow



Lemon-Lime




Wasabi




Stormy Seas




Indigo




Desert Sunset



Desert Sunrise



Sandstone



Sculpted Clay



Suede Gray



Granite Ridge



Wood Grain*



WOODFLEX™/ FITFLEX

Outstanding flooring solution for multipurpose rooms— ideal for competitive play

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Realistic wood look with benefits of a synthetic floor; hygienic, antibacterial properties
 Low maintenance costs—never needs sanding or refinishing
 Common Uses—multipurpose recreation facilities, gymnasiums, church/assembly halls, dance studios and aerobics/fitness studios

SPECIFICATIONS

WOODFLEX™

Material
High performance vinyl
Roll Size
6'7" x 49'2"
Top Layer Thickness
1.3 mm
Total Thickness
6.7 mm
 * Available in 8 mm
Weight
6.7 mm: 0.84 lbs/sq ft
8 mm: 0.88 lbs/sq ft
Game Lines
Use urethane paints for game line painting

FITFLEX

Material
High performance vinyl
Roll Size
6'7" x 65'7"
Top Layer Thickness
0.5 mm
Total Thickness
5 mm
Weight
0.59 lbs/sq ft
Game Lines
Use urethane paints for game line painting

POSSIBLE LEED V 2009 CREDITS


Woodflex™
IEQ Credit 4.1 (1 point)
IEQ Credit 4.3 (1 point)
MR Credit 4 (1-2 points)

Fitflex
IEQ Credit 4.1 (1 point)
MR Credit 4 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
IEQ Low-Emitting Materials (up to 3 points)


WOODFLEX™

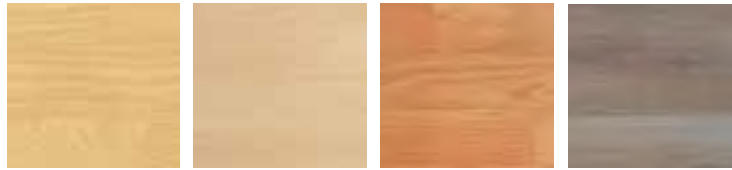

* Maple * Camaru * Beech Silver Oak

WOODFLEX™ UV-CURED PUR REINFORCED TECH SURFACE SYSTEM

With embedded micronized aluminum oxide—It's not a finish so it won't wear down

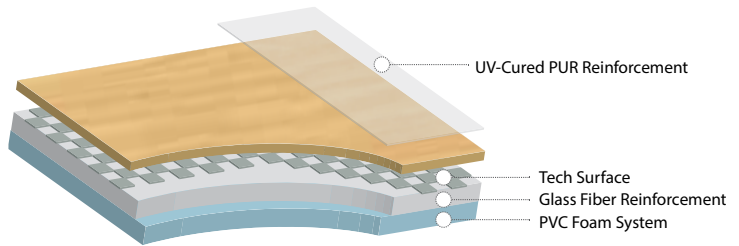

FITFLEX™




Maple



GAMEFLEX®

Outstanding flooring solution for multipurpose rooms— ideal for competitive play					
FEATURES	ZONES	1	2	3	4
Vibrant, fun colors Complements Woodflex™ Excellent shock absorbency to protect athletes Extremely hygienic; non-porous surface has bactericidal and fungicidal treatment Common Uses—multipurpose recreation facilities, gymnasiums, church/assembly halls, dance studios and aerobics/fitness studios					
SPECIFICATIONS ♻️					
Material High performance vinyl Roll Size 6' 7" x 49' 2" Top Layer Thickness 1.3 mm Total Thickness 6.7 mm, 8 mm Weight 6.7 mm = 0.78 lb/sq ft 8 mm = 0.86 lb/sq ft Game Lines Use urethane paints for game line painting					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					

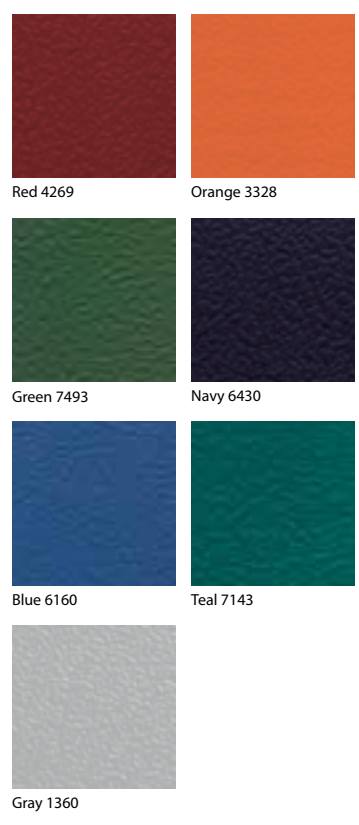

UNDERFLOOR SL

FEATURES	ZONES	1	2	3	4
Prevents moisture from passing through to the floor foundations Keeps your floor covering stable Makes updating flooring over time easier					
SPECIFICATIONS ♻️					
Material Specially coated fiberglass reinforced moisture barrier sheet underlay Roll Size 4' 9" x 82'			Weight 0.33 lb/sq ft Thickness 1.4 mm Recycled Content 5.5% pre-consumer		
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
 <p><i>Creates a floating floor on sub-floors with moisture challenges or for installations over existing floors.</i></p>					




PRO SHIELD

FEATURES	ZONES	1	2	3	4
<p>Giant-sized tiles protect gym floors</p> <p>Easy to handle for quick set up and break down</p> <p>Plus Backing keeps floors clean</p> <p>Common Uses—universities, multipurpose facilities, convention halls</p>					
SPECIFICATIONS ♻️					
<p>Material 100% solution-dyed polypropylene</p> <p>Tile Size 39-3/8" x 78-3/4"</p> <p>Thickness 6 mm</p> <p>Weight 91.4 oz/sq yd</p> <p>Slip Resistance (ASTM C1028) 0.61 Dry and 0.54 Wet</p> <p>Note Minimums apply, consult our Product Specialists for assistance</p>					



Gray



Blue

SPORTS FLOORING

WEIGHT ROOMS & FITNESS

SPECTATION™

SPECTATION™

Heavy-duty rubber with non-porous surface

FEATURES	ZONES	1	2	3	4
Hammered finish and multicolor speckle design					
Shock absorbing backing					
Common Uses—health clubs, weight rooms, ice arenas, ski areas, locker rooms, rest rooms, recreation and multipurpose facilities					
SPECIFICATIONS ♻️					
Material Dual durometer vulcanized rubber, made with 25% pre-consumer recycled rubber					
Tile Size Square Edge Tile = 39.37" x 39.37" Interlocking Tile = 38.58" x 38.58"					
Top Layer Thickness 2.5 mm					
Total Thickness Square Edge Tile = 9 mm Interlocking Tile = 9 mm					
Weight Square Edge Tile = 2.4 lbs/sq ft Interlocking Tile = 2.2 lbs/sq ft					
Critical Radiant Flux (ASTM E648) Class 1					
Chemical Resistance (EN423) No Change					
Minimum Order Minimum order quantities may apply					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					

SPECIFICATIONS ♻️

POSSIBLE LEED V 2009 CREDITS

POSSIBLE LEED V 4 CREDITS



BLADE RESISTANT



Red Snapper



Blue Fin



Plankton



Trout



Blaze




Nautical



Pheasant



Bunker



Gatorade



Swordfish



Georgetown




Gray Cast



COMBINATION SPORT TILE

Waffle backing for sound reduction and impact absorption



Ideal for 2nd floor or higher and penthouse					
FEATURES	ZONES	1	2	3	4
Waffle backing for sound reduction and impact absorption Easy-to-clean surface Extremely durable and long lasting Dowel connection system allows for free-floating installation No adhesive necessary Available in 1-1/2" thickness for free weight stations and 1" for cardio areas Common Uses—strength training facilities, fitness centers					
SPECIFICATIONS					
Material 100% post-consumer recycled SBR, EPDM rubber and polyurethane binder Tile Size 24" x 24" Weight 1-1/2" – 5.75 lbs/sq ft (23 lbs/tile) 1" – 4.5 lbs/sq ft (18 lbs/tile) Total Thickness 1-1/2", also available in 1" Wear Layer Thickness 6 mm Sound Insulation (ASTM E492) FIIC 61 Slip Resistance (ASTM C1028) 0.79 Dry and 0.81 Wet Recycled Content 100% Black: 90.1% post-consumer 20% color: 0.5% pre-consumer, 87.4% post-consumer 50% color: 1.4% pre-consumer, 82.9% post-consumer 90% color: 3% pre-consumer, 74.9% post-consumer Minimum Order Core Granule Colors & Custom Granule Colors must be ordered in 4 tile multiples; minimum order = 24 tiles					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.3 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					
MR Environmental Product Declarations (up to 2 points)					
IEQ Low-Emitting Materials (up to 3 points)					



ACCESSORIES

Finishing Kit

Fill in cuts around posts and play structure mounts.

Transition Wedge

19-1/2" long x 6" wide

Outside Corner Wedge

9-3/4" long (inside edge) x 6" wide

Inside Corner Wedge

9-3/4" long (outside edge) x 6" wide

Interlocking Pins

4" long x 5/8" in diameter, included with every order, four pins per tile at no charge.




Inside corner Outside corner Wedge Interlock

STANDARD COLORS



Black Red Blue Gray

CORE GRANULE COLORS

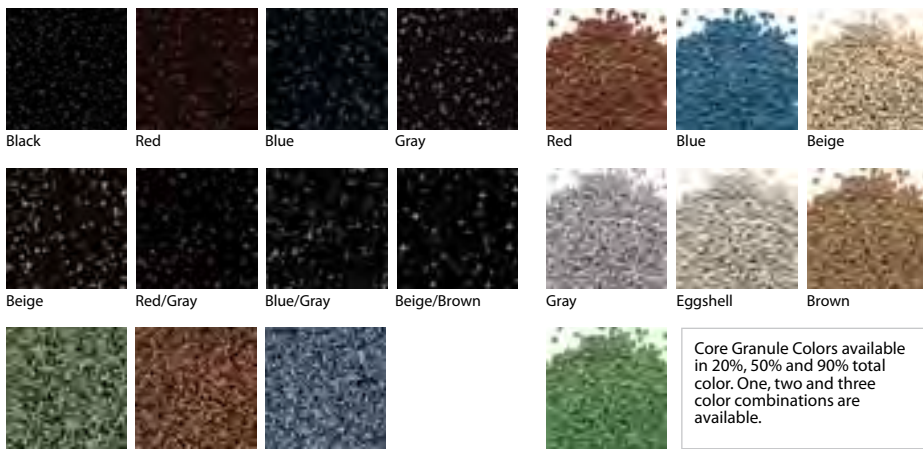

Red Blue Beige
 Beige Red/Gray Blue/Gray Beige/Brown Gray Eggshell Brown
 Amazon Mohave Adriatic Green

Core Granule Colors available in 20%, 50% and 90% total color. One, two and three color combinations are available.

CUSTOM GRANULE COLORS

Available upon request. These color choices available in 20%, 50% and 90% speckled. Up to 5 color combinations are available.



DOMINATION™

Ideal for high color, high impact

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

High color and high impact rubber flooring for supercharged training facilities
 Block manufacturing produces high density top surface that is extremely durable and easy to clean
 Endures the impact of heavy weights and fitness equipment
 Shock absorbent, spike and blade resistant
 More than 50% recycled rubber in each tile
 Common Uses – strength training facilities, weight rooms, ice arenas, ski areas, fitness centers, health clubs

SPECIFICATIONS

Material
 Laminated rubber with 100% post-consumer black recycled rubber and EPDM rubber granules
 Also available with dual-density cushion backing

Tile Size
 Square Edge: 38" x 38"
 Interlocking: 37" x 37"

Total Thickness
 10 mm (approx 3/8")
 12 mm (approx 1/2")

Wear Layer Thickness
 4 mm (approx. 1/4")

Weight
 10 mm = Approximately 2.54 lbs/sq ft
 12 mm = Approximately 2.99 lbs/sq ft

Custom
 Colorful inlaid logos available, consult our Product Specialists for details.

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.3 (1 point)
MR Credit 5 (1-2 points)	IEQ Credit 4.1 (1 point)

POSSIBLE LEED V4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 MR Environmental Product Declarations (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)




Rush Red



Offense Orange



Game Gold



Goal Green



Blast Blue



Blitz Blue




Power Purple



Grit Gray



LOGOS

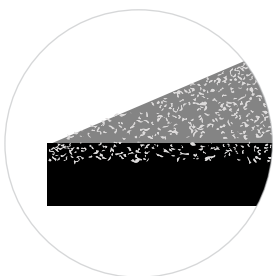

ACTIVATION SPORT TILE

Ideal for 2nd floor or higher and penthouse

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Waffle backing for sound reduction and shock absorption
 Unique composite structure for superior durability and wear resistance
 Extremely durable and long lasting
 Dowel connection system allows for free floating installation
 No adhesive necessary
 Great solution for extremely heavy weights
 Common Uses—fitness facilities, strength training facilities

SPECIFICATIONS



Material 100% recycled SBR with either recycled SBR or EPDM top wear layer Tile Size 24" x 24" Weight 4.5 lbs/sq ft (18 lbs/tile) Total Thickness 1" Sound Insulation (ASTM E492) FIIC 50 Critical Radiant Flux (ASTM E648) Class 2: 0.22 – 0.44 w/cm ²	Additional Specs Custom colors available. Please contact our Product Specialists for more information. Accessories Dowels: each tile contains 6 dowels to secure the tile in place. Dowels are inserted into factory molded holes and the tiles are driven together using a wooden block or mallet. Recycled Content Varies by color and SBR or EPDM intensity. Please contact our Product Specialists for more information.
--	--

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)
 MR Credit 5 (1-2 points)

POSSIBLE LEED V4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)

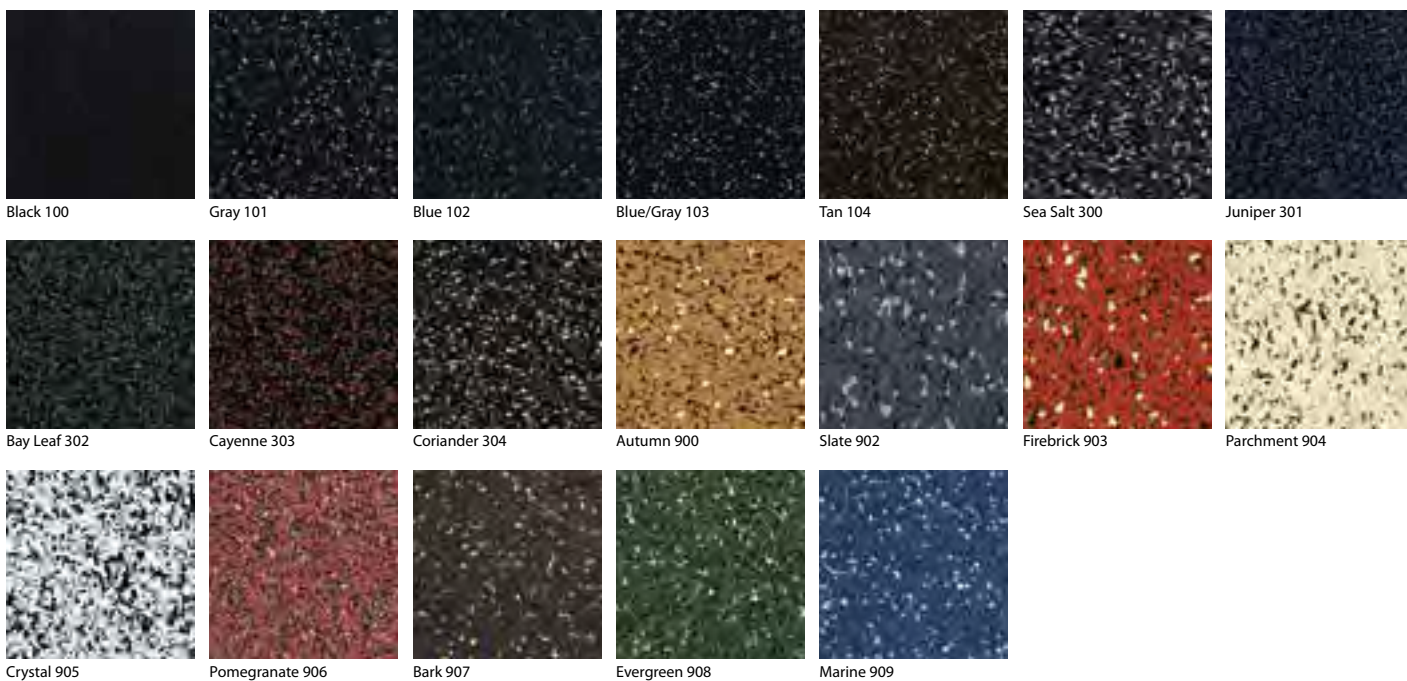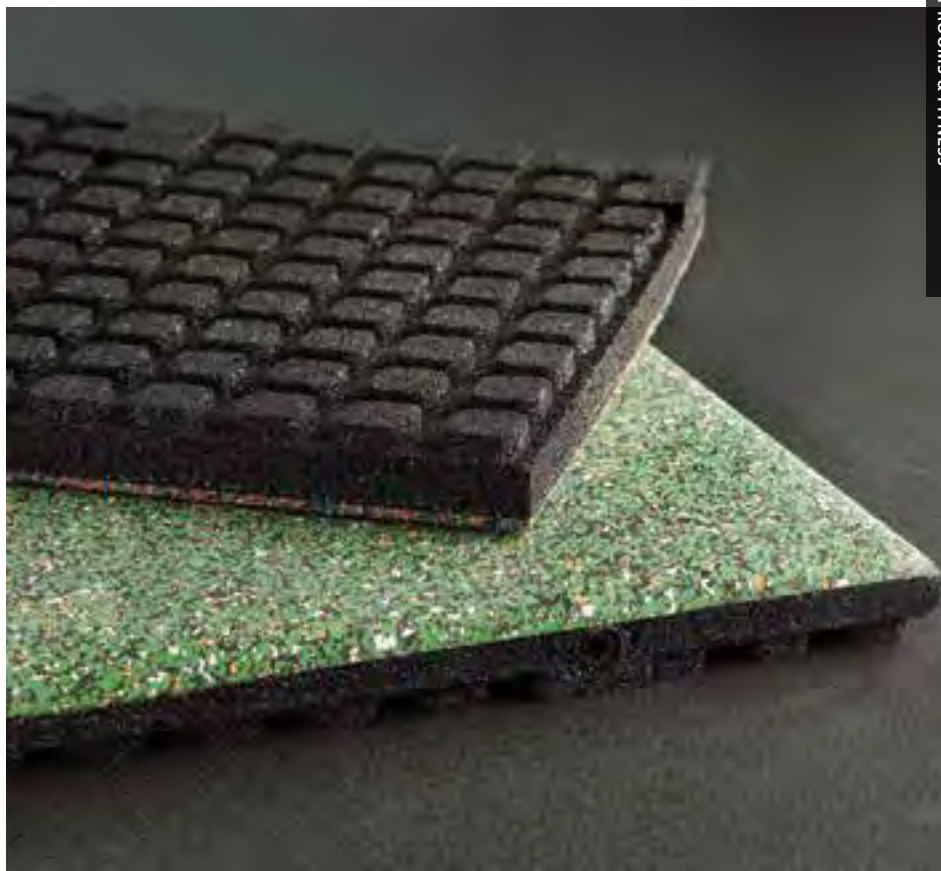

Black 100

Gray 101

Blue 102

Blue/Gray 103

Tan 104

Sea Salt 300

Juniper 301

Bay Leaf 302

Cayenne 303

Coriander 304

Autumn 900

Slate 902

Firebrick 903

Parchment 904

Crystal 905

Pomegranate 906

Bark 907

Evergreen 908

Marine 909

DUO TILE

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Premium performance sports flooring with all the benefits of modular tiles
 Shock absorbent, spike and blade resistant
 Even color distribution and state-of-the-art precision quality edges provide a seamless look
 Common Uses—health clubs, weight rooms, ice arenas, ski areas, locker rooms, retail stores, anti-fatigue work stations, entrances

SPECIFICATIONS

Material
 Black recycled rubber with EPDM colored granules—10% and 30% intensity

Tile Size
 Square Edge Tile = 38" x 38"
 Interlocking Tile = 37" x 37"

Thickness
 Square Edge Tile = 4 mm, 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm and 12 mm
 Interlocking Tile = 8 mm, 9 mm, 10 mm and 12 mm

Weight
 Varies by thickness

Slip Resistance
 (ASTM D2047) 1.04 Dry, 1.05 Wet

Chemical Resistance
 (ASTM F925) No Change

Options
 Reducer, Nosing

Recommended Installation
 Square Edge Tile = Glue down
 Interlocking Tile = Loose lay, reversible

Custom
 Colorful inlaid logos available, consult our Product Specialists for details

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point)
MR Credit 5 (1-2 points)	IEQ Credit 4.3 (1 point)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 MR Environmental Product Declarations (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)




PRECISION SQUARE EDGE TILES

For glue-down applications where water and moisture may be present—Ski Areas, Hockey Arenas, Locker Rooms

REVERSIBLE INTERLOCKING EDGE TILES


For loose-lay applications. Installs quickly without adhesives or floor prep in dry areas—Weight Room & Fitness Areas

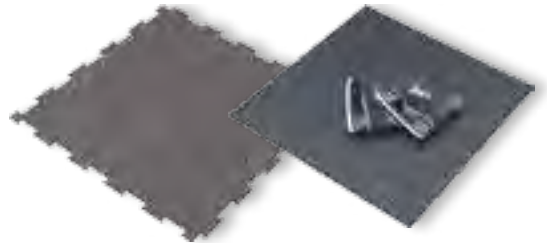

DUO TILE LIFECYCLE

By weight, 90% of Duo Tile flooring consists of recycled rubber tires


At the end of its useful life, Duo Tile can be returned for recycling

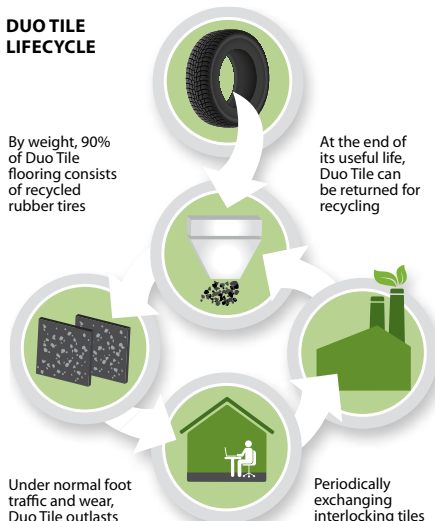

Under normal foot traffic and wear, Duo Tile outlasts carpet and linoleum tile

Periodically exchanging interlocking tiles between high and low traffic zones will double or triple the life of the floor

30% INTENSITY

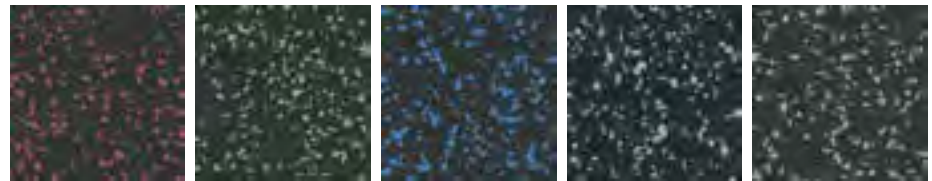


Red

Green

Blue

Turquoise*

Gray

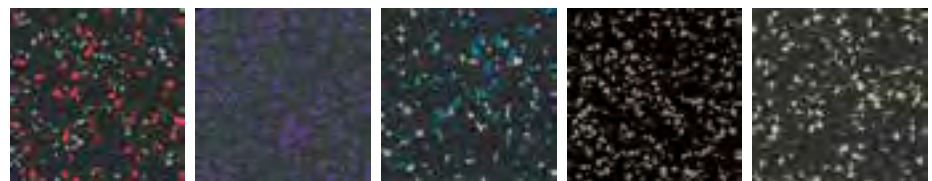

Red/Gray*


Purple*

Blue/Gray*

Brown

Beige

10% INTENSITY



Red

Green

Blue

Turquoise*

Gray

Red/Gray*

Purple*


Blue/Gray*


Brown

Beige


* Minimums Apply

DECATHLON

FEATURES	ZONES	1	2	3	4
Shock absorbent, spike and blade resistant Non-laminated surface offers outstanding slip-resistance, even when wet Colored EPDM rubber granules never wear away Common Uses—health clubs, weight rooms, ice arenas, ski areas, retail stores, anti-fatigue work stations					
SPECIFICATIONS 					
Material Black recycled rubber with EPDM colored granules					
Roll Size 9mm = 4' x lengths up to 800 lin ft					
Standard Thickness 9 mm					
Additional Thicknesses 4, 6, 8 or 12 mm					
Standard Weight 9 mm = 2 lbs/sq ft					
Slip Resistance (ASTM D2047) 0.90					
Recommended Installation Glue down					
Recycled Content Mochachino = 4.12% pre-consumer and 73% post-consumer All other colors = 2.09% pre-consumer and 81.9% post-consumer					
Minimum Order 20 lin ft					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Low-Emitting Materials (up to 3 points)			

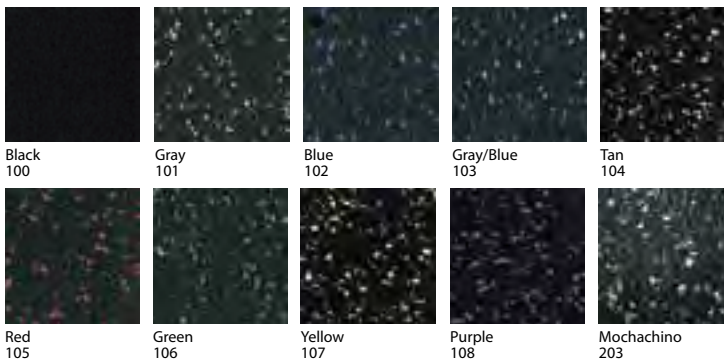


DECATHLON DESIGN

FEATURES	ZONES	1	2	3	4
Create colorful designs to accent or enhance any interior Customize patterns and colors Non-laminated surface offers outstanding slip resistance, even when wet Common Uses—retail stores, office and commercial buildings, schools, entrances, sports facilities					
SPECIFICATIONS 					
Material Black recycled rubber with EPDM colored granules					
Roll Size 4' x lengths up to 800 lin ft					
Thickness 9 mm					
Weight 2 lbs/sq ft					
Slip Resistance (ASTM D2047) 0.9					
Chemical Resistance (ASTM F925) No Change					
Recommended Installation Glue down					
Recycled Content 9% pre-consumer and 56% post-consumer					
Minimum Order 20 lin ft					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point)			
MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Low-Emitting Materials (up to 3 points)			




LOCK MAT


FEATURES	ZONES	1	2	3	4
<p>Interlocking, heavy-duty rubber flooring installs easily without adhesives or floor prep</p> <p>Precision water-jet interlock system virtually eliminates gaps</p> <p>Non-marking, non-skid and resistant to bacteria provides extra protection over hard floors and/or carpet</p> <p>Common Uses—weight rooms, ice arenas, health clubs, locker rooms, pro shops, exercise areas, dugouts</p>					
SPECIFICATIONS 					
<p>Material Recycled rubber with EPDM colored granules; 100% Black tiles contain 93% post-consumer recycled content; Color tiles contain 87% post-consumer recycled content</p> <p>Style Interlocking edge (borders and corners also available)</p> <p>Tile Size Centers = 46.71" x 46.71" (15.15 sq ft) Borders & Corners = 23.05" x 46.71" or 46.71" x 46.71"</p> <p>Custom Sizes Consult our Product Specialists for assistance</p> <p>Thickness 3/8" or 1/2"</p> <p>Weight Varies by thickness</p> <p>Slip Resistance (ASTM C1028) 0.85 Dry and 0.95 Wet</p>					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points) MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					



Black



Glacier



Emerald



Midnight




Coral




SUPER SPORT WEIGHT MAT

FEATURES	ZONES	1	2	3	4
<p>Heavy rubber matting protects floors and equipment from damage</p> <p>Shock absorbent and spike resistant</p> <p>Easy and economical to install, requires no adhesives, yet does not shift once installed</p> <p>Common Uses—weight rooms, ice arenas, health clubs, locker rooms, exercise areas, dugouts, live stock and agricultural settings</p>					
SPECIFICATIONS 					
<p>Material Recycled rubber</p> <p>Style Square edge</p> <p>Mat Size 4' x 6' (may vary slightly)</p> <p>Thickness 13 mm (1/2"), 19 mm (3/4")</p> <p>Weight 13 mm = 75 lbs 19 mm = 100 lbs</p>					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points) MR Credit 5 (1-2 points)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)					



Black

PROPEL TILE™

FEATURES	ZONES	1	2	3	4
<p>Polypropylene fibers will not zipper like standard carpet</p> <p>Dimensionally stable; won't shrink or curl</p> <p>Class 1 fire rating</p> <p>Common Uses—corporate, educational, hospitality, retail</p>					
SPECIFICATIONS 					
<p>Material 100% solution-dyed polypropylene with 15% post-consumer recycled content</p> <p>Backing Bitumen</p> <p>Tile Size 19-11/16" x 19-11/16"</p> <p>Thickness 9/32"</p> <p>Weight 117.97 oz/sq yd</p>					
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points) IEQ Credit 4.1 (1 point)					
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					



Charcoal



Brown




Gray



Beige



Blue



CONTRACT FLOORING

FLOORWORKS® PLANKS





floorazzo ™
by matsinc.®

The patent pending FUSION System™ molecularly bonds Floorazzo™ tile seams to create a truly monolithic floor. FUSION System™ provides a seamless, bead- and crevice-free installation, unique only to Floorazzo™.

The Floorazzo™ & FUSION System™ is a hygienic flooring solution with long-lasting natural beauty. Because it is both durable and extremely easy to maintain, it is a practical solution for environments where controlling contamination is a priority or where monolithic flooring is desired.



Base



Sanitary Cove Base



Inside Edge



Outside Edge

FLOORAZZO™

Outlasts and outperforms nearly all other types of flooring

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Extremely durable to withstand heavy foot traffic, tables, and carts
 Stain-resistant and easy to clean
 Significantly reduces maintenance and repair expense
 Unlimited custom color possibilities
 Common Uses—airport terminals, banks, bus terminals, corporate office buildings, department stores, education facilities, government buildings, healthcare facilities, hospitality environments, municipal buildings, retail stores

SPECIFICATIONS

Material Homogeneous resilient terrazzo flooring tile Tile Size 2' x 2' and optional 2' x 4' FUSION System™ panels Thickness 3/16" Weight 2.15 lbs/sq ft Recycled Content Gem - 41% Post-Consumer & 21% Pre-Consumer Marble - 20% Post-Consumer & 15% Pre-Consumer	Static Coefficient of Friction (ASTM C1028) 0.66 Dry and 0.7 Wet Critical Radiant Flux (ASTM E648) Class 1 Static Load Limit (ASTM F970) 1000 psi Residual Indentation (EN 433) < 0.2 mm Adhesive Mats Inc. Perma-Bond Seaming Options Butt Joint, FUSION™ U.S. Patent No. 8,033,079
---	--

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.3 (1 point)
MR Credit 5 (1-2 points)	


POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)
 MR Material Ingredients (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)




floorazzo 
 by matsinc.®

FLOORAZZO™ GEM

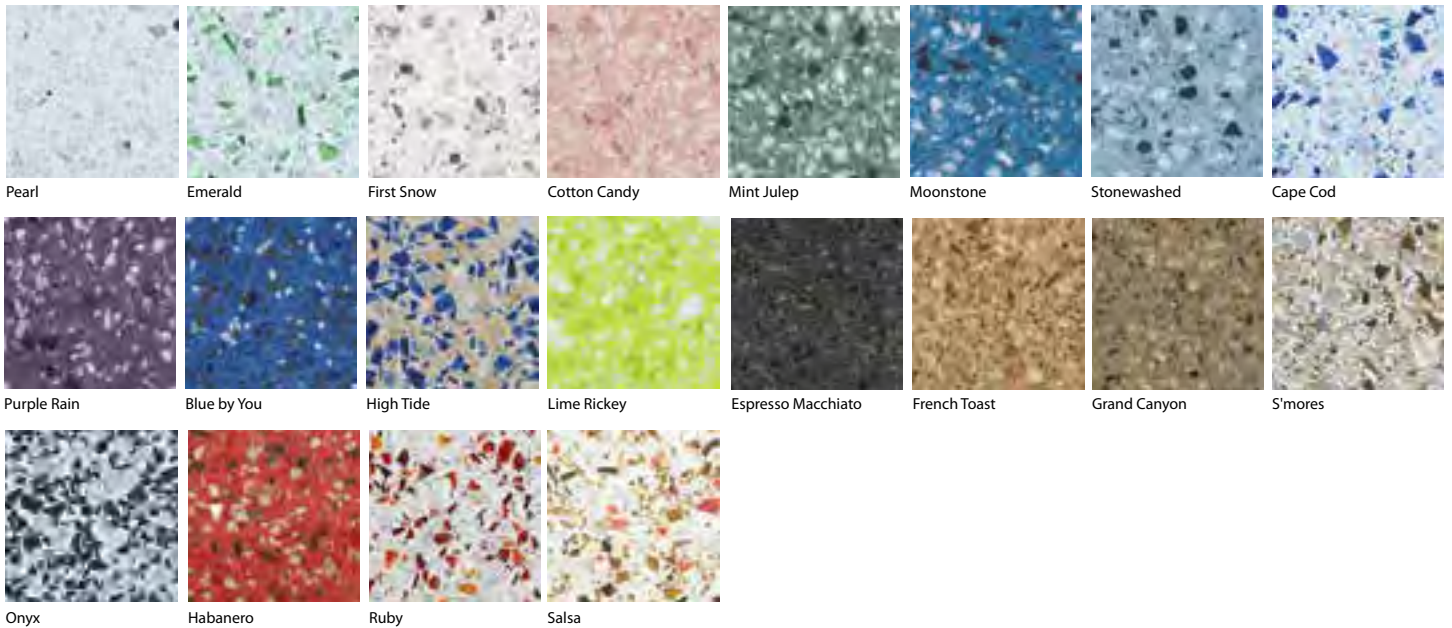



FLOORAZZO™ MARBLE

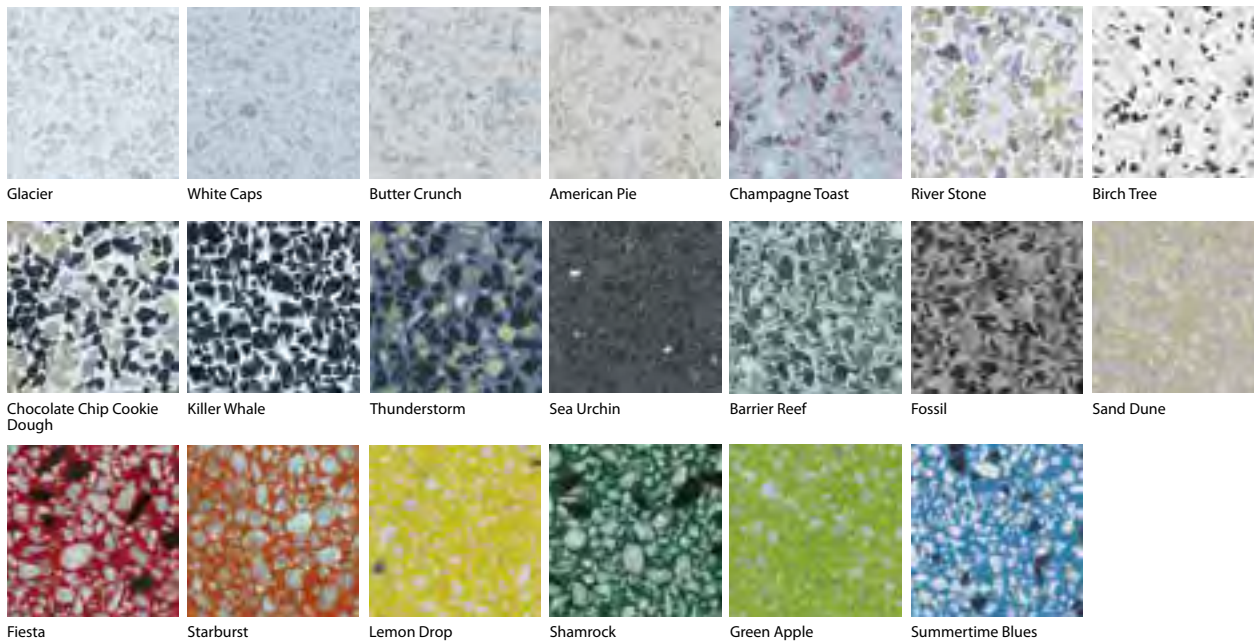

WINEO PURLINE

wineo PURline organic flooring will sustain the most demanding commercial applications

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Hygienic nonporous material with a tenaciously wear resistant surface
 Simple maintenance requirements that does not include finishing, waxing, buffing or stripping
 Produced with 90% renewable & natural raw materials, PURline is GreenGuard Gold certified
 Common Uses—corporate offices, daycare centers, educational facilities, hospitals, hotels, medical offices, retail

SPECIFICATIONS ♻️

Material Heterogeneous commercial botanol floor covering consisting of bio-polyurethane, glass fiber reinforcement, paper print layer, and PU top layer	Weight 0.74 lbs/sq ft Thickness 2.5 mm Sizes 6' 7" x 65' 7"
---	---

POSSIBLE LEED V 2009 CREDITS

MR Credit 6 (1 point)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point)
-----------------------	--

POSSIBLE LEED V 4 CREDITS

- MR Environmental Product Declarations (up to 2 points)
- MR Material Ingredients (1 point)
- MR Sourcing of Raw Materials (up to 2 points)
- IEQ Low-Emitting Materials (up to 3 points)




DESIGNED BY NATURE. REFINED BY SCIENCE. FLOORING REINVENTED.

Botanol is an entirely new class of flooring produced from natural raw materials. wineo PURline botanol is formulated with canola oil harvested from rappa seed and castor oil harvested from castor seed and chalk. The ingredients are molecularly transformed to create extremely dense polyurethane and a tenaciously durable, nonporous floor covering.



CANOLA OIL
from rappa seed

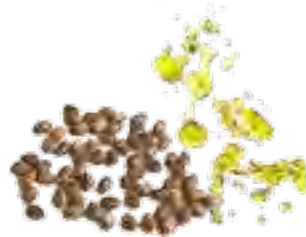

CASTOR OIL
from castor seed



CHALK



TOTAL HEIGHT 2.5 mm



Pumpkin	Honey	Kiwi	Sky	Pewter	Titanium	Muslin	Chantilly	Hallifax Oak
Berry	Tangelo	Eucalyptus	Lagoon	Silver	Moonlight	Sand	Almond	Pacific Oak
Ruby	Apricot	Rainforest	Indigo	Steel	Graphite	Melange	Cashmere	Cottage Oak
Lavender	Terracotta	Peacock	Navy	Midnight	Sable	Cappuccino	Chestnut	Missouri Oak
Hyacinth	Kettle	Cotton		Marigold	Crème Brulee	Steamed Beech	Columbia Walnut	American Cherry

WINEO PURLINE PLANKS

Botanol organic flooring that will sustain the most demanding commercial applications

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Hygienic nonporous material with a tenaciously wear resistant surface
 Simple maintenance requirements that do not include finishing, waxing, buffing or stripping
 Produced with 90% renewable & natural raw materials, PURline is GreenGuard Gold certified
 Common Uses—corporate offices, daycare centers, educational facilities, hospitals, hotels, medical offices, retail

SPECIFICATIONS

Material Heterogeneous commercial botanol floor covering consisting of biopolyurethane, glass fiber reinforcement, paper print layer, and PU top layer	Weight 0.79 lbs/sq ft Thickness 2.5 mm Plank Sizes (varies by sku) 200 mm x 1200 mm (≈ 8" x 47"), 250 mm x 1500 mm (≈ 9-3/4" x 59")
--	---

POSSIBLE LEED V 2009 CREDITS

MR Credit 6 (1 point)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point)
-----------------------	--

POSSIBLE LEED V 4 CREDITS


MR Environmental Product Declarations (up to 2 points)
 MR Material Ingredients (1 point)
 IEQ Low-Emitting Materials (up to 3 points)



PLANKS ≈ 8" X 47"



Natural Spruce



Sitka Spruce



Spicebark Hickory



Broom Hickory




Lonia Pine



Riverbank Hickory



Sugar Maple




King Oak




Laurel Oak



Etria Cypress



Tasmanian Oak




Leyland Cypress



Abstract Burl



Silver Birch



Pewter Birch




Spanish Oak



Tigerwood



Persimmon



Concord Oak



California Pine



Argos Spruce




Cocoa Jarrah



Empire Oak



Arctic Fir



English Oak



Appalachian Oak

WINEO PURLINE TILES

Botanol organic flooring that will sustain the most demanding commercial applications

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Hygienic nonporous material with a tenaciously wear resistant surface
 Simple maintenance requirements that do not include finishing, waxing, buffing or stripping
 Produced with 90% renewable & natural raw materials, PURline is GreenGuard Gold certified
 Common Uses—corporate offices, daycare centers, educational facilities, hospitals, hotels, medical offices, retail

SPECIFICATIONS ♻️

Material Heterogeneous commercial botanol floor covering consisting of biopolyurethane, glass fiber reinforcement, paper print layer, and PU top coat	Weight 0.79 lbs/sq ft Thickness 2.5 mm Sizes (varies by sku) 335 mm x 670 mm (≈ 13" x 26"), 500 mm x 1000 mm (≈ 19-1/2" x 39")
---	--

POSSIBLE LEED V 2009 CREDITS


MR Credit 6 (1 point)	IEQ Credit 4.1 (1 point) IEQ Credit 4.3 (1 point)
-----------------------	--

POSSIBLE LEED V 4 CREDITS


MR Environmental Product Declarations (up to 2 points)
 MR Material Ingredients (1 point)
 IEQ Low-Emitting Materials (up to 3 points)



TILES ≈ 13" X 26"

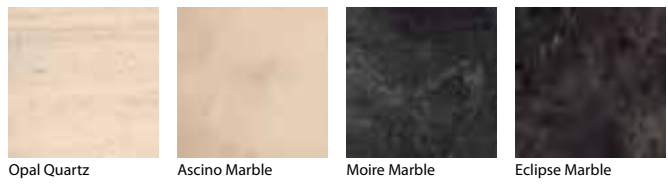

TILES ≈ 19-1/2" X 39"

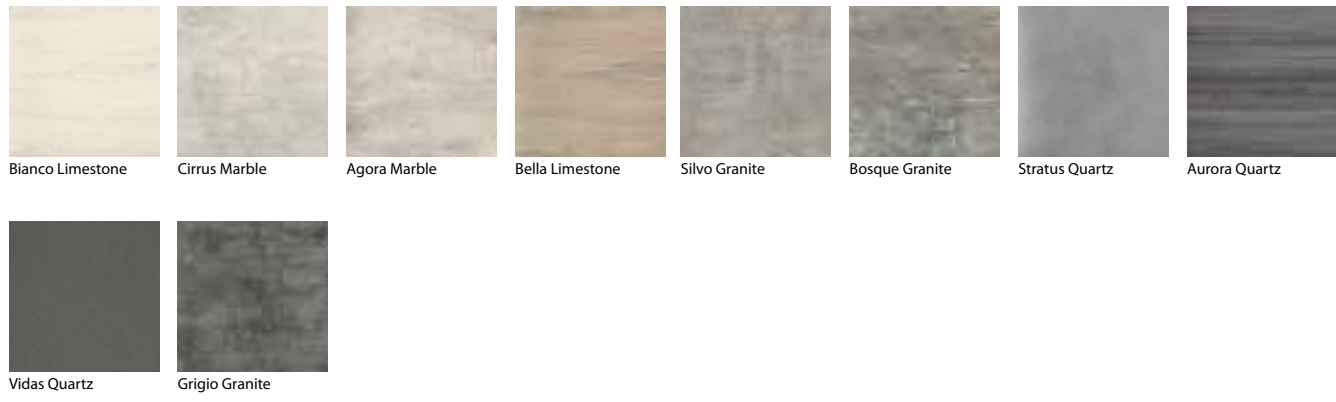

DEBOLON

Ideal for heavy traffic conditions in healthcare, education and more.

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Brilliant color selection produced using water- based inks
 Good impact sound reduction
 Extremely durable with the industry's thickest wear layer
 Superior dimensional stability
 Never needs waxing, stripping or buffing
 Common Uses—hospitals, medical offices, corporate offices, educational facilities, daycare centers, retail

SPECIFICATIONS

Material
 Heterogeneous resilient floor covering with glass fiber reinforcement. Traffic-rated for heavy commercial/light industrial use with a proprietary UV-cured PUR top surface.

Backing
 Fleece, Acoustic

Roll Size
 2 x approx. 25 m (approx. 6'7" x 82')

Overall Thickness
 2.6 mm, 3.65 mm

Weight
 0.48 lbs/sq ft, 0.57 lbs/sq ft

POSSIBLE LEED V2009 AND V4 CREDITS

IEQ Low-Emitting Materials (up to 3 points)



USEFUL, BEAUTIFUL, AND ENVIRONMENTALLY-FRIENDLY MATERIAL

The Debolon collections feature contemporary designs wood and stone looks with useful properties including matte finish, sound reduction, indentation resistance and comfort underfoot.

ENVIRONMENT

Durable and beautiful, fully-recyclable Debolon is Floorscore® certified, 100% phthalate-free resilient vinyl flooring manufactured with water based inks and no heavy metals in an ISO 9001 and 14001 certified facility. Debolon does not require waxing, buffing or stripping, and maintenance requirements are simple and will not negatively impact indoor air quality, energy consumption or facility costs making it the optimal flooring for environments where hygiene and minimal downtime are priorities.



Please visit matsinc.com for the latest colors and designs.




COLLECTIONS

<p>R250 Silence</p>	<p>R200 Silence</p>	<p>1 Surface protection XPM® 2 Transparent wear layer 3 Design print 4 Compact layer 5 Glass fiber reinforcement</p>
----------------------------	----------------------------	--

6 Integrated impact sound insulation system

6 Integrated impact sound insulation system
 7 Fleece backing

Overall Thickness



R250 3.65 mm



R200 2.6 mm

Collection	Thickness	Sound Absorption	XPM Surface	Backing
R250 Silence	3.65 mm	19 dB	0.50 mm	Acoustic
R200 Silence	2.60 mm	15 dB	0.50 mm	Fleece



FLOORWORKS®
Distinctive, Durable, Different



FLOORWORKS® PLANKS & TILES

Superior quality, commercial grade LVT.					
FEATURES	ZONES	1	2	3	4
<p>Dozens of authentic-looking, cutting-edge standard designs with hundreds of additional custom options available</p> <p>Superior quality planks and tiles authentically emulate nature's patterns and colors</p> <p>Extremely durable and easy to maintain</p> <p>ISO 9001 certified manufacturing facility</p> <p>Environmentally-sound ISO 14001 manufacturing process</p> <p>Other optional accessories include Tacky-Back pre-applied adhesive and Underfloor MC (see page 98)</p> <p>Common Uses—restaurants, retail, multi-family properties, hotels, healthcare facilities, corporate office buildings, schools</p>					
SPECIFICATIONS ♻️					
<p>Material Resilient flooring planks made of heterogeneous vinyl with 28% pre-consumer recycled content</p> <p>Thickness 3 mm</p> <p>Weight Approximately 1 lb/sq ft</p> <p>Adhesive Mats Inc. Perma-Bond or Perma-Spray 2000</p>					
<p>Plank Sizes 4" x 36", 6" x 36", 6" x 48" (varies by style)</p>		<p>Tile Sizes 12" x 18", 18" x 18" or 12" x 24" (varies by style)</p>			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point) IEQ Credit 4.2 (1 point) IEQ Credit 4.3 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points) IEQ Low-Emitting Materials (up to 3 points)					



PLANK COLORS



Oregon White Oak W1003



Sterling Strip Wood W9304



River Birch W7002



Gray Ash W7550



Sandy Beech W5020



Heritage Maple Wood W2003



Natural Oak W1001



Blended Strip Wood W9300



Sapwood Cherry W6505




Tuscan Distressed Wood W1051



Brazilian Cherry W6501



Sedona Distressed Wood W1050

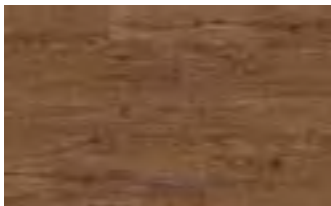

Cajun Pine W4030



Antique Mahogany W1020



Cherry Walnut W3010




Antique Zebra Wood W9001



Gunsmoke Oak W1010




Shellbark Hickory W1036

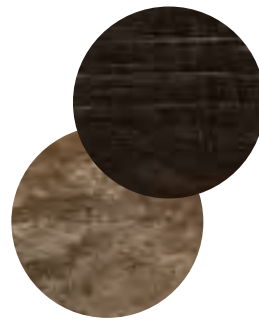

Stunning, natural-looking wood designs and colors are further enhanced with embossed textures to accentuate the realistic appearance of highly grained patterns, distressed woods and distinctive handscraped planks.


TILE COLORS

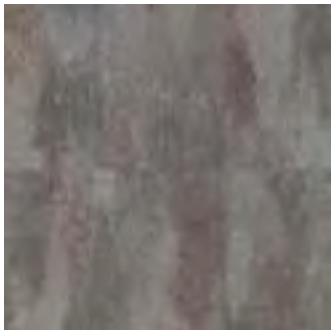


Quarry Slate T216



Travertine Gold T501

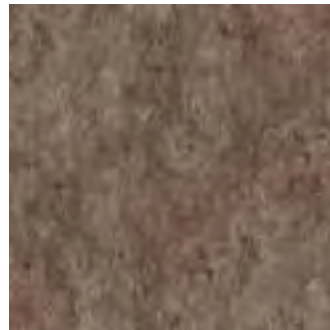

Indian Slate T211

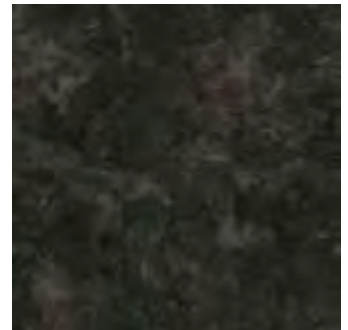


Mountain Slate T203



X-CORE CONNECT™

FEATURES	ZONES	1	2	3	4
<p>The X-Core Connect™ flooring hybrid compound structure offers dimensional stability five times greater than traditional vinyl</p> <p>Two protective top surfaces provide extreme durability for high traffic environments</p> <p>Lay floors in sunny areas problem-free with dimensionally stable click installation</p> <p>Common Uses—corporate offices, hospitality, multi-family, retail</p>					
<p>SPECIFICATIONS ♻️</p> <p>Material 100% waterproof commercial floor covering consisting of dimensionally stable X-Core Connect™ Patented Core Technology, decorative layer, PU protective layer and XTRA-DUR top coating</p> <p>Plank Size 1520 mm x 225 mm (~59.84" x 8.86")</p> <p>Tile Size 600 mm x 300 mm (~23.62" x 11.81")</p> <p>Overall Thickness 8.5 mm</p> <p>Weight 2.15 lbs/sq ft</p>					

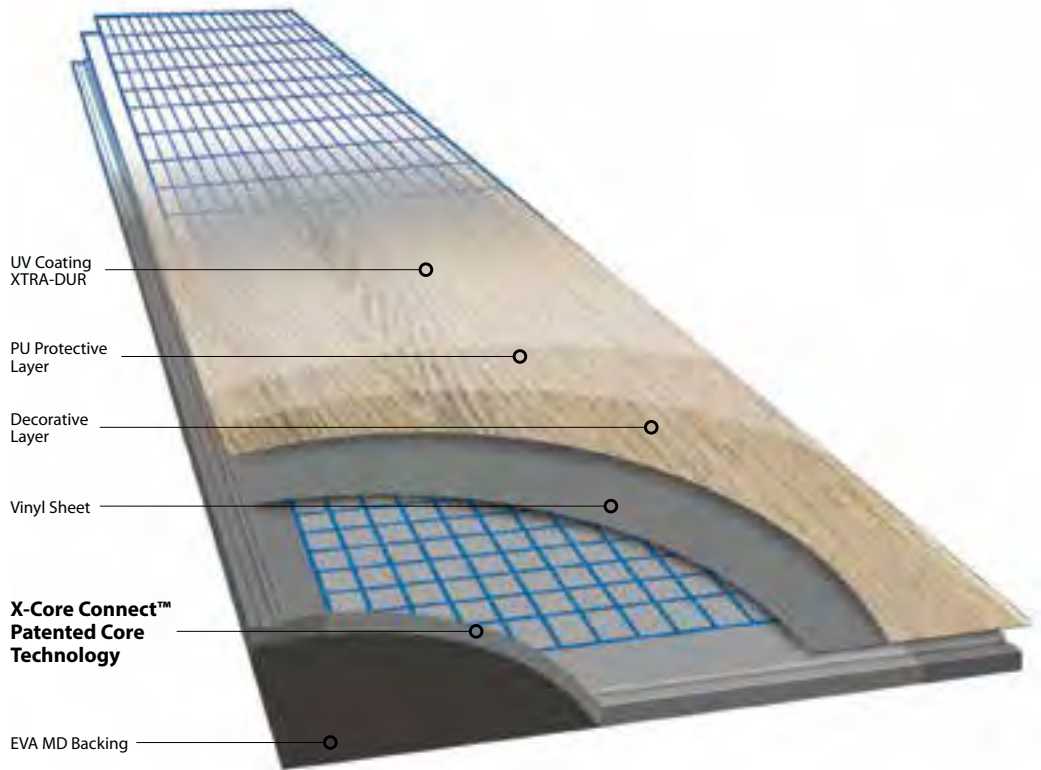

PLANK COLORS



Avalon



Brazilian Parquet



Caramel




Grey Oak



Hazel Wood




Island Mahogany

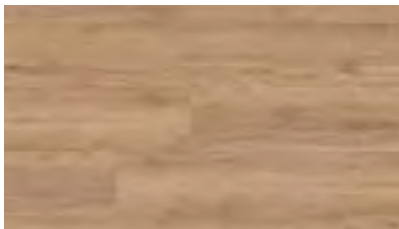

Modena Oak




Red Walnut

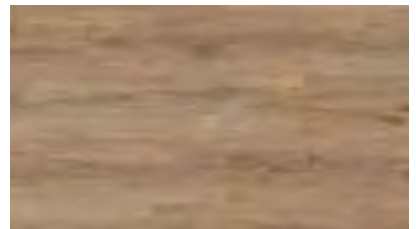


Toasted Oak



Turkey Oak

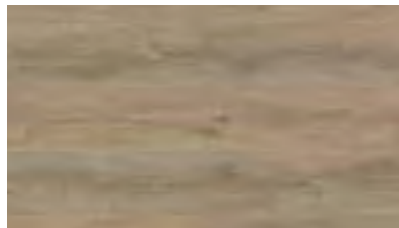

Venezia Oak

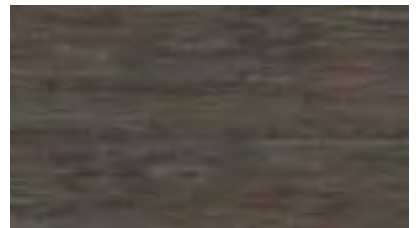

Viking




White Amber



White Sense

TILE COLORS

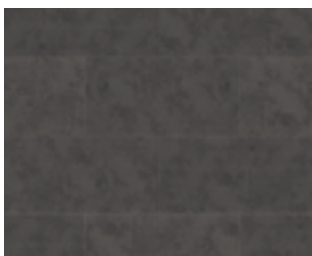


Grafitte



Oxide Brown



Zen Light

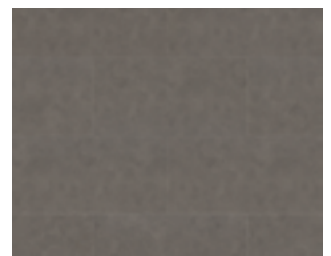

Zen Medium

PANORAMA TILE

The versatility, comfort and style of carpet with the wear performance, non-allergenic properties and easy-to-clean features of resilient flooring

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Uniform color and non-laminated surfaces provide lasting wear qualities
 Sustainable and environmentally-friendly
 Comfortable underfoot, resistant to scuffs, scratches and indentations
 Easy to install and maintain
 Common Uses—retail, corporate offices, hotels, lobbies, cafes, fitness centers

SPECIFICATIONS

Material Recycled black rubber with EPDM colored granules. Recycled content varies by color (Pre-consumer range 6.1% - 18.1%; Post-consumer range 0% - 58.4%)	Weight Varies by thickness Slip Coefficient of Friction (ASTM D2047) Up to 50% color: Dry 1.04 or Wet 1.05; Over 50% color: Dry 0.85 or Wet 1.01
Style Square Edge or Interlocking Tile	Recommended Installation 4 mm tiles must be glued down. We strongly recommend a glue down installation for 6 mm tiles. 8 mm, 10 mm and 12 mm tiles can be loose laid.
Sizes Square Edge Tile: 38" x 38" Interlocking Tile: 37" x 37"	
Thicknesses Square Edge Tile: 4 mm, 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 12 mm Interlocking Tile: 8 mm, 9 mm, 10 mm, 12 mm	

POSSIBLE LEED V 2009 CREDITS


MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point)
MR Credit 5 (1-2 points)	IEQ Credit 4.3 (1 point)

POSSIBLE LEED V 4 CREDITS

MR Environmental Product Declarations (up to 2 points)
 MR Sourcing of Raw Materials (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)




HUMMINGBIRD

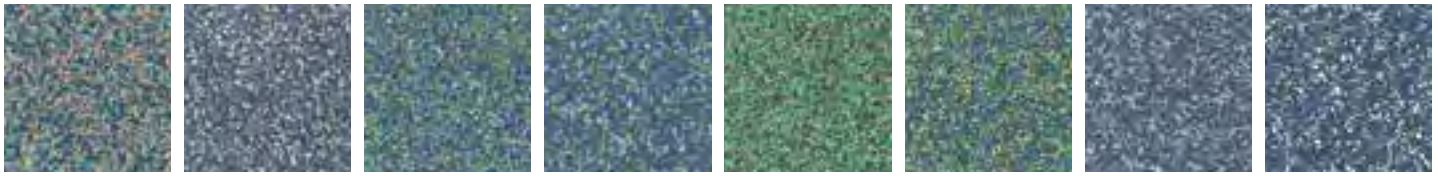

Waterfall Empress Hillstar Amazila Nectar Fairy Larkspur Lazuline

FRESH FIG

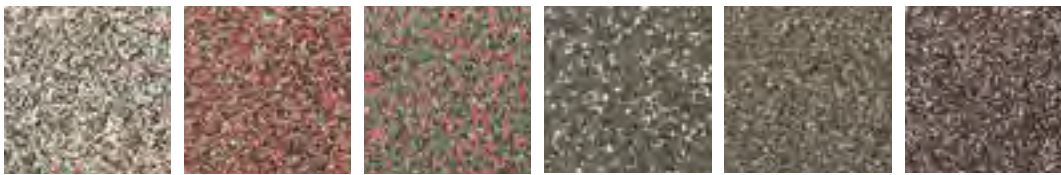


Jooce Bar Sweet Valencia Autumn Fest Teavana Organic Vineyard Farmers Market

GREAT HORNED OWL



Shenandoah Echoing Hoot Trail Mix Pine Needles Edgy Shadows Honey Mushroom Tree Hollow Misty Woodland

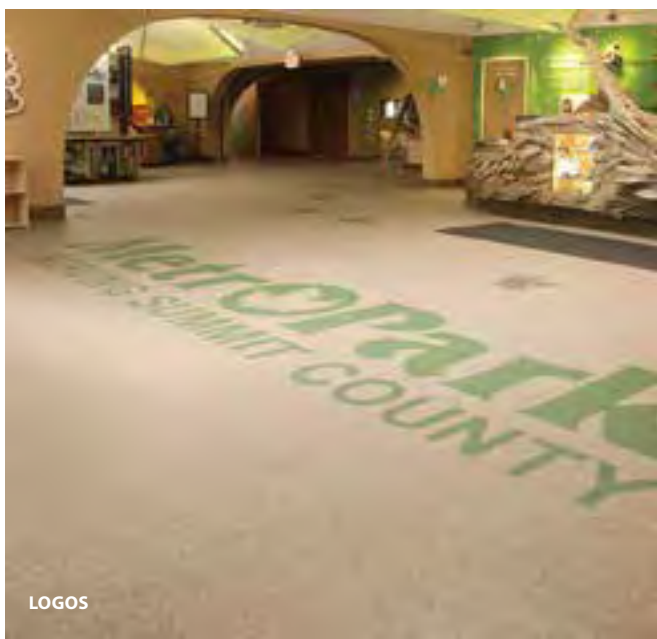


WINTER FOREST




Avalanche Balsam Fir Hibernation Big Dipper Frosted Flakes Winter Blues Spearmint Moose Tracks

MONUMENT VALLEY

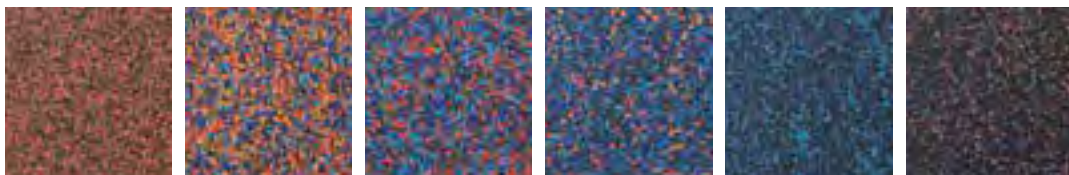

Casa Adobe Fiesta Fire and Ice Stained Glass Blue Cactus Tango

SANDY BEACH

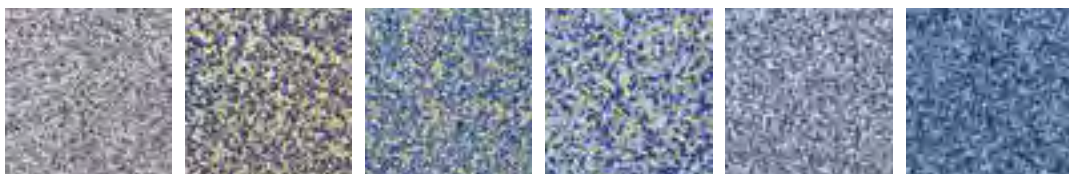

Sea Shells Paradise Castaway Bahama Breeze Sea Salt High Tide

PANORAMA CORK & COLOR

The versatility, comfort and style of carpet with the wear performance, non-allergenic properties and easy-to-clean features of resilient flooring

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Uniform color and non-laminated surfaces provide lasting wear qualities
 Sustainable and environmentally-friendly
 Comfortable underfoot, resistant to scuffs, scratches and indentations
 Easy to install and maintain
 Common Uses—retail, corporate offices, hotels, lobbies, cafes, fitness centers

SPECIFICATIONS

Material Recycled black rubber with EPDM colored granules and cork flakes.	Weight Varies by thickness
Style Square Edge or Interlocking Tile	Static Coefficient of Friction (ASTM D2047) 0.78
Sizes Square Edge Tile: 38" x 38" Interlocking Tile: 37" x 37"	Recommended Installation 4 mm tiles must be glued down. We strongly recommend a glue down installation for 6 mm tiles. 8 mm, 10 mm and 12 mm tiles can be loose laid.
Thicknesses Square Edge Tile: 4 mm, 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 12 mm Interlocking Tile: 8 mm, 9 mm, 10 mm, 12 mm	

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)	IEQ Credit 4.1 (1 point)
MR Credit 5 (1-2 points)	IEQ Credit 4.3 (1 point)

POSSIBLE LEED V 4 CREDITS

MR Environmental Product Declarations (up to 2 points)
 MR Sourcing of Raw Materials (up to 2 points)
 IEQ Low-Emitting Materials (up to 3 points)



panorama
CORK &
color



Bianco




Moscato



Moreto



Freisa




Clairette




Marquis



Pecorello



Emperor



Concord




Carmine




Lakemont



Bluebell



Jupiter



Brunello

PANORAMA CUSTOM

Creating a unique design is simple.

Select your colors, mix them up, see your design simulated in an actual setting and order a sample.

Experiment with color using our online interactive floor designer program Mixology® at www.matsinc.com/mixology.



by SCS Certified



MATSINC.COM/MIXOLOGY

STEP 1 - Colored granules are measured out based on designer's concept or custom matching to materials.

STEP 2 - Petri dish submitted for approval.

STEP 3 - Custom tile produced.

Wine Red	Hot Tamale	Red	Caliente Red *	Rose	Orange	Yellow	Earth Yellow		
Pine Green	Green	Ocean Green *	Ultramarine Blue	Royal Blue	Blue	Turquoise	Aqua *	Capri Blue	Blue Gray
Purple	Heather *	Pastel Green	Reed Green *	Sepia Brown	Brown	Beige	Green Beige *	Khaki	Eggshell
Black	Charcoal	Fawn	Gray *	Ash Gray	Pearl				

LARGE AND SMALL FLECKS

Minimum of 5% Black OR Small Fleck required

* Large Flecks Only

SOLIRIS™

Remarkable slip resistance in wet areas with heavy traffic

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Vibrant flooring that provides slip resistance, beauty and comfort for barefoot and soft-soled foot traffic in areas where topical water is present

The brilliant color palette can be used to create bold designs or custom logos

UV and chlorine resistant for a long-lasting, easy-to-maintain appearance

Can be loose-layed and used as a mat

Common Uses—poolside, water parks, showers, locker rooms, hydrotherapy rooms

SPECIFICATIONS

Material

Sheet vinyl with 16.5% recycled content

Roll Sizes

6' x 66'

Thickness

2.9mm (~1/8")

Custom Sizes

6' width x custom lengths up to 66'

Weight

0.63 lbs/sq ft

Critical Radiant Flux (ASTM E648)

Class 1

Slip Resistance (ASTM D2047)

0.93 dry, 0.80 wet

Chemical Resistance (ASTM F925)

No Change

POSSIBLE LEED V 2009 CREDITS


MR Credit 4 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)




Pink



Red




Orange



Yellow



Meadow Green




Gator Green




Evergreen




Turquoise




Aqua




Royal Blue



Periwinkle



Gray



Dark Gray




Sand



Gravel



Black



White

TERRATRAX™

Safe, slip-resistant surface withstands heavy foot traffic and rolling loads

FEATURES	ZONES	1	2	3	4
----------	-------	---	---	---	---

Improves safety in wet areas with slip-resistant texture
 UV stable, tolerates heat and sunlight in outdoor applications

Common Uses—indoor and outdoor corridors, hydrotherapy rooms, lobbies, ramps, indoor mall, stairways/landings, stadiums

SPECIFICATIONS ♻️

Material
 Sheet vinyl with 16.5% recycled content

Roll Sizes
 6' x 66'

Thickness
 2.5 mm (~3/32")

Custom Sizes
 6' width x custom lengths up to 66'

POSSIBLE LEED V 2009 CREDITS

MR Credit 4 (1-2 points)

POSSIBLE LEED V 4 CREDITS

MR Sourcing of Raw Materials (up to 2 points)



Terratrax™ Point



Quartz



Copper



Bronze



Platinum



Graphite



Terratrax™ Block



Shale




Umber



Zinc





Slate

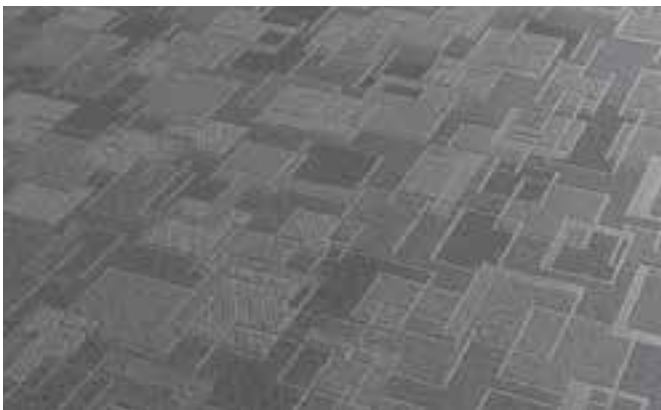

PROPEL TILE™

FEATURES	ZONES	1	2	3	4
Polypropylene fibers will not zipper like standard carpet Dimensionally stable; won't shrink or curl Class 1 fire rating Common Uses—corporate, educational, hospitality, retail and fitness					
SPECIFICATIONS ♻️					
Material 100% solution-dyed polypropylene with 15% post-consumer recycled content		Tile Size 19-11/16" x 19-11/16"			
Backing Bitumen		Thickness 9/32"			
		Weight 117.97 oz/sq yd			
POSSIBLE LEED V 2009 CREDITS					
MR Credit 4 (1-2 points)		IEQ Credit 4.1 (1 point)			
POSSIBLE LEED V 4 CREDITS					
MR Sourcing of Raw Materials (up to 2 points)		IEQ Low-Emitting Materials (up to 3 points)			

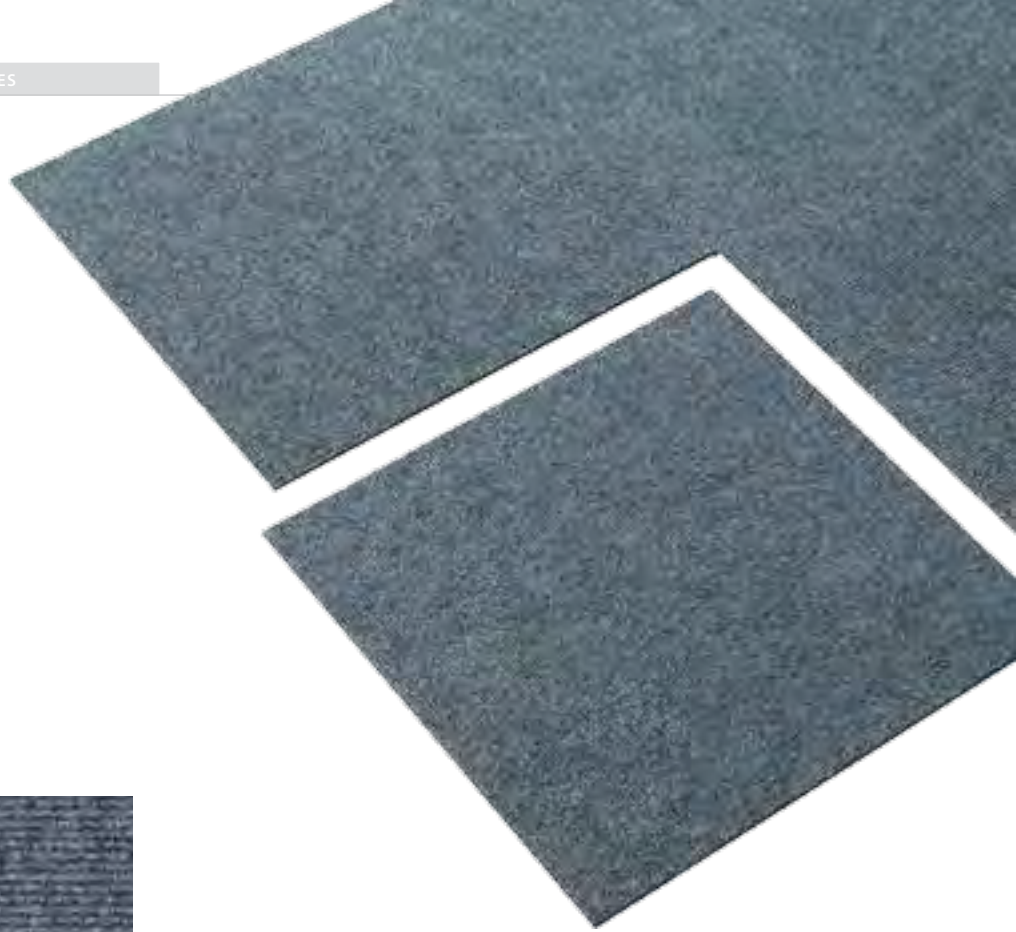

Charcoal



Brown



Gray



Beige



Blue



ACCESSORIES





UNDERLAYMENT

SOUND

FloorFx is a unique acoustical underlayment for Floorworks® 3mm LVT. Different than other sound absorption layers, FloorFx offers a rigid construction which virtually eliminates denting that is common with other sound barriers. FloorFx has been engineered to provide simple installation reducing install time by 50% compared to other systems. FloorFx is a floating underlayment system that does not require an adhesive to be installed. The overlapping joints with pre-applied pressure sensitive adhesive activates on contact and pressure.

SOUND & COMFORT

Underfloor QC is sound-inhibiting cushion underlayment for resilient flooring. Use Underfloor QC to improve underfoot comfort and acoustics between floors. Underfloor QC is suitable over concrete, wood and radiant heat systems and is installed using Perma-Bond adhesive depending on the application.


MOISTURE & SOUND

Underfloor MC is suitable over concrete, wood and radiant heat systems and can be installed as a floating underlayment system or with perimeter adhesive depending on the application.

MOISTURE

Underfloor SL is a cost-effective moisture barrier that offers quick installation. The dimensionally stable vinyl underlayment equalizes minor subfloor unevenness.

	MOISTURE	MOISTURE & SOUND	SOUND & COMFORT	SOUND
Underlayment	Underfloor SL	Underfloor MC	Underfloor QC	FloorFx
Material	Specially coated fiberglass reinforced PVC	Specially coated fiberglass reinforced PVC	PVC foam cushion	Two MDF panels XPS foam sound reduction layer & polyethylene film
Thickness	1.4 mm	4.0 mm	4.0 mm	8.0 mm
Weight	0.33 lbs/sq ft	0.37 lbs/sq ft	0.45 lbs/sq ft	11.5 lbs/panel
Dimensions	Rolls 4' 9" x 82'	Rolls 4' 9" x 82'	Rolls 6' 7" x 68' 8"	Panels 32.5" x 22.25"
ASTM 2170 Substrate Moisture Relative Humidity	92%	92%	82%	75%
ASTM F970 Static Load: (pass = <.005" @ 175 psi)	Pass	Pass	Pass	Pass
ASTM F1914 Residual Indentation	7.43% (-0.013")	24.70% (-0.061")	26.62% (-0.074")	2.96 (-0.013")
ASTM E989 IIC *	36	50	47	52
ASTM E2179 IIC (Delta) *	ΔIIC 8	ΔIIC 22	ΔIIC 19	ΔIIC 24

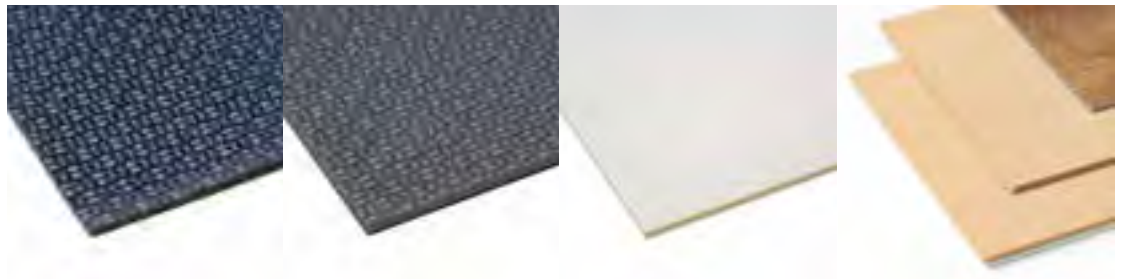

ALUMINUM FRAMING



Mats Inc. offers a comprehensive line of aluminum frames and transitions for all of our products to ensure smooth transitions and trouble-free installations. Frames are sold in full lengths as listed below or in 1' increments and should be cut to the appropriate size and mitered on-site to ensure proper fit.

PRODUCT	TYPE	SIZE	ITEM#
"J" Frame	Recessed/Surface Mount	5/8" x lengths to 20'	ALJFRLP
"L" Frame	Recessed	7/16" x lengths to 12'	ALLFR
"R" Frame	Recessed/Surface Mount	7/16" x lengths to 12'	ALRFRLP
"T" Section Divider	Recessed/Surface Mount	5/16" x lengths to 10'	ALT38
Ramp Frame	Surface Mount	3/8" x lengths to 12'	ALRMP3
Overlap Ramp Frame	Surface Mount	7/16" x 2-3/4" x lengths to 10'	ALSMR2
"Z" Frame	Recessed/Surface Mount	3/8" x lengths to 12'	WALZFR12


Note

Many Aluminum Foot Grilles are supplied with frame systems fabricated specifically for the product type and installation method. These frames are shipped with the Foot Grilles. Additional frames are not required. Consult our Product Specialists for details.


"J" Frame




"L" Frame




"R" Frame




"T" Section Divider




"Z" Frame



Ramp Frame








Overlap Ramp Frame




NOSING & EDGING

Many matting Roll Goods and Walk-Off Mats & Runners may be cut to custom sizes and have vinyl nosing applied to one, two, or all four sides of the mat to provide smooth transitions for loose-laid applications. Consult one of our Product Specialists for assistance.


	Product	Size	Application
	Factory Edge		
	Standard (NOSWON-XX) (Flat Profile) Black (BK) Brown (BR)	3/16" x 2-7/16" x 50' (exposed width is 1-1/4") LOOSE up to 50 feet	Glue on/Sew on
	Low Profile (LOPROFI) Black	1/4" x 2-11/16" x 80' (exposed width is 1-1/2") LOOSE up to 80 feet	Sew on
	UltraFlex (NOFLEX-XX) Black (BK) Brown (BR)	5/16" x 3-5/16" x 50' (exposed width is 1-7/8") LOOSE up to 50 feet	Sew on
	Narrow Cove		

	Product	Size	Application
	Wide Cove		
	High Profile		
	Heat Press Embossed		
	Emboss		


Standard Nosing

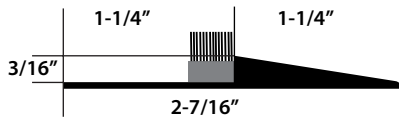


Low Profile Nosing



Premium "Ultra-Flex" Nosing

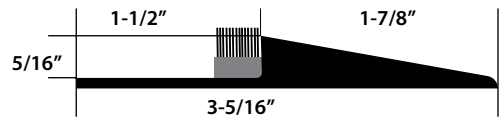

High Profile Nosing

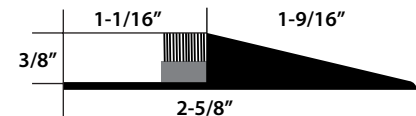


Berber Fiber Example Pile Thickness 5/32" Roll Thickness 3/8"

TRANSITIONS & LEVELERS

Consult the specifications of each product for the appropriate transition and leveler options for your mat, or contact one of our Product Specialists for assistance.

TRANSITIONS				
PRODUCT	DESCRIPTION	SIZE	COLOR	ITEM#
Ramp-Flex PVC Ramp	For use with modular tiles with heights from 5/16" to 7/16"	12' lengths (full lengths only)	Black	ALCRS BK
Trans-Ramp	For use with modular tiles with heights from 5/16" to 7/16"	12' lengths (full lengths only)	Black	WAL PVCRRMP 2
LEVELERS				
PRODUCT	DESCRIPTION	SIZE	COLOR	ITEM#
Level-Flex Leveling Strip (1/8")	Use to shim material of uneven heights	1/8" x 100'	Black	NOLEV18 BK
Level-Flex Leveling Strip (1/4")	Use to shim material of uneven heights	1/4" x 50'	Black	NOLEV14 BK

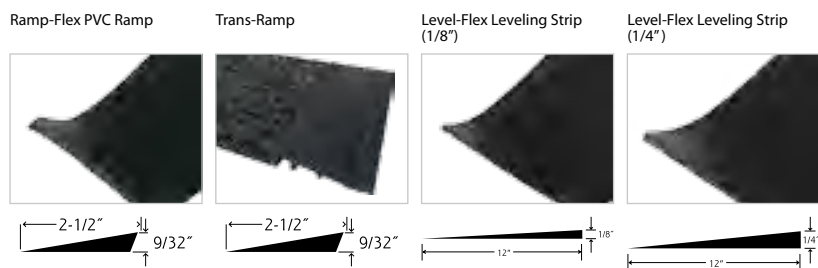

TAPES

PRODUCT	TYPE	SIZE	ITEM#
Contact Tape	Permanent installations of transition strips or matting over hard surfaces. Will not leave residue.	1" x 164' Roll (Narrowest)	MSTAC1
		2" x 164' Roll (Narrow)	MSTAC2
		3.4" x 165' Roll (Wide)	MSCONT3
Success Tape	Adhering rubber- and vinyl-backed matting to carpet or hard surfaces. Will not leave residue.	39" x 82' Roll (Extra Wide)	MSDUO39
Velcro® Brand Tape	Adhering rubber- and vinyl-backed matting to carpet	1" x 75' (Loose to 75')	MSVELCR
3M™ Stay-in-Place Matting Tape 130	Designed to keep mats in place on finished hard surface floors Features a double-sided tape with a strong adhesive on one side that sticks to the mat backing, plus a low-tack, adhesive on the opposite side to keep the mat in place Repositionable for moving or cleaning	2" x 100' Roll	TAPE130 TAPE
3M™ Stay-in-Place Matting Tape 140	Designed to keep mats in place on looped-pile carpeted surfaces Features Scotchmate™ Hook Fasteners that intertwine with looped carpet fibers to keep the mat in place Repositionable for moving or cleaning	2" x 100' Roll	TAPE140 TAPE
3M™ Matting Seaming Tape	Brown vinyl tape to bridge and bond mat sides and ends together. Use with 3M™ Matting Adhesive	2" x 100' Roll	MS3MTAPBR

Velcro® is a registered trademark of Velcro BVBA. Used with permission.



MATS INC. CARPET MATTING AND 3M™ NOMAD™ MATTING NOSLING OPTIONS

Please contact us at 1-800-628-7462 to request a brochure.

ADHESIVES

Mats Inc. offers a complete line of high-quality adhesives designed to make installation of our products trouble-free. Select the appropriate adhesive for our Roll Goods, Modular Tiles and Sports Flooring products from the chart below. Adhesive recommendations may also be found in the Specifications section for each product in this catalog. Please note actual coverage may vary depending on substrate. For assistance, or more detailed installation instructions, please contact our Product Specialists.

PRODUCT	USAGE	SIZE	COVERAGE (APPROXIMATE)	ITEM#
All-Weather Solvent-Free Adhesive	Exterior use. Rubber-backed and latex-backed matting products	1 gallon	75-100 sq ft	MSH0241
		4 gallon	360-400 sq ft	MSH0244
Cold Weld Adhesive	Seaming vinyl contract flooring for glue down installations	4.5 oz	200 lin ft	MSCOLDWELD45
Duo-Bond	Combination, Domination™, Duo Tile, Panorama Living Color	4 gallon	Coverage varies	DBOND 4
MI Multi-Bond Carpet Mat Adhesive	All rubber- and latex-backed matting	1 gallon	110-125 sq ft	MSMULT1
		4 gallon	440-500 sq ft	MSMULT4
MI Perma-Bond Adhesive Do not use for other roll and tile goods except the ones listed	Debolon	1 gallon	Coverage varies	MSPERMA 1
	Floorworks® Planks and Tiles		160-260 sq ft	
	Woodflex™/Gameflex®		160-180 sq ft	
	Rubber-backed tiles		108-126 sq ft	
	Floorazzo™		160-200 sq ft	
		4 gallon	Coverage varies	MSPERMA 4
MI Release-Bond Modular Tile Adhesive	All modular mat tiles with Bitumen backing	1 gallon	220-260 sq ft	MSTILE1
	Chicago Collection™		160-180 sq ft	
		4 gallon	Coverage varies	MSTILE4
Urethane Bond Rubber Flooring Adhesive	Permanent installations of solid rubber and rubber-backed sports flooring, rubber-backed contract floor covering and Tire Tile	2 gallon	120-160 sq ft	MSCX941 2
		5 gallon	300-400 sq ft	MSCX941 5
Vinyl Cement	Edging and seaming, vinyl nosing	1 pint	Coverage varies	MSCEM PT
		1 quart	Coverage varies	MSCEM QT
MI Perma-Spray 2000	Spray adhesive for Floorworks® Planks and Tiles, Bitumen backed modular tiles	22 oz can 6 cans per case Full cases only	160-190 sq ft	MSSPRAY 2000
Ultrabond G21	SureTac™ Premium Vinyl backed goods	2 gallon	370-490 sq ft	MSG21 2PT
	Spectation™		300 sq ft	
	Ovation		200-250 sq ft	
Tacky-Back	Solvent-free, acrylic dispersion adhesive backing pre-applied to flooring for quick and easy installation on sub-floors with moisture concerns	7/8" width x 10' length Thickness: 0.13 mm		MGBOND TAPE
3M™ Matting Adhesive	Urethane-based adhesive for use with Matting Seaming Tape and/or edging materials	3 oz	10 lin ft	MSTUBE

CLEANERS & SEALERS

PRODUCT	USAGE	SIZE	COVERAGE (APPROXIMATE)	ITEM#
JohnsonDiversey STRIDE Neutral Cleaner Citrus Scent (Green Seal™ Certified)	Recommended for regular cleaning of Duo Tile, Panorama Rubber, Woodflex™ and Gameflex®	1 gallon	Coverage varies	MSSTRID 1
		5 gallons	Coverage varies	MSSTRID 5
Duo-Clean	Combination, Domination™, Duo Tile, Panorama Living Color	10 liters (2.64 gallons)	Coverage varies	DCLEAN 10L
Duo-Seal	Combination, Domination™, Duo Tile, Panorama Living Color	10 liters (2.64 gallons)	Coverage varies	DSEAL 10L
Floorazzo™ Primer	Sealer/Primer for Floorazzo™	1 quart	500 sq ft	FZPRIMEQ
		1 gallon	2,000 sq ft	FZPRIMEG
Floorazzo™ Gloss Coating	Finish/Coating for Floorazzo™	1 quart	100 sq ft	FZGLOSSQ
		1 gallon	400 sq ft	FZGLOSSG
Floorazzo™ Satin Coating	Finish/Coating for Floorazzo™	1 quart	100 sq ft	FZSATINQ
		1 gallon	400 sq ft	FZSATING



matsinc.®

Every step of the way

179 Campanelli Parkway
 Stoughton, MA 02072
 800-MATS-INC (800-628-7462)
 781-344-1537 fax
 www.matsinc.com



CleanZone, Design Print, miVantage and the Mats Inc. logo are trademarks of Mats Inc. 3M, Nomad, Safety-Walk and Scotchmate are trademarks of 3M. Used under license in Canada.

© 2017 Mats Inc. All rights reserved.